

CV15G

LED CANOPY LUMINAIRE



PROJECT _____ DATE _____ TYPE _____

NOTES _____

REV: 06 2021



When Specifying Options, Please Check with Factory for Availability and Lead-Time. Any finish other than Paraflex bronze order is non-cancelable and non-returnable. Any modified product, any selected options added to standard products, deem order non-cancelable and non-returnable. All RMA, Return Material Authorization, must be factory approved.

COMPACT, HEAVY-DUTY HOUSING

The CV15G is a 15" Circular Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The CV15G can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

120-277V STANDARD TYPE VS DISTRIBUTION

OPERATING TEMPERATURE -20C TO 40C

0C - 40C with EM Pack Option

PRODUCT APPLICATIONS

- Building Canopy
- Parking Garages
- Tunnels
- Storage Facilities
- Gas Stations

ORDERING GUIDE


Sample Part # CV15G - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CV15G				
	12W 12 WATTS	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	MS MOTION SENSOR
	24W 24 WATTS	30K 3000K - WARM WHITE	WH WHITE	MS-D2 MOTION SENSOR WITH BILEVEL DIMMING
	36W 36 WATTS	35K 3500K - NEUTRAL WHITE	BL BLACK	D1 0-10V DIMMING
	48W 48 WATTS	40K 4000K - NEUTRAL WHITE	SL SILVER	D2 STEP DIMMING (120V ONLY)
	60W 60 WATTS	50K 5000K - COOL WHITE	CC CUSTOM COLOR	EM EMERGENCY BATTERY PACK
	72W 72 WATTS	57K 5700K - DAYLIGHT		V1* 480/347V INPUT (120-277V STANDARD)
	84W 84 WATTS			*NOT AVAILABLE WITH EM OR MOTION SENSOR
	96W 96 WATTS			

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMEN	EFFICACY
12W	12.65	3000K	1362.50	107.71
12W	12.65	4000K	1403.38	110.94
12W	12.65	5000K	1445.48	114.27
24W	23.54	3000K	2725.00	115.76
24W	23.54	4000K	2806.75	119.23
24W	23.54	5000K	2890.95	122.81
36W	34.27	3000K	4097.74	119.57
36W	34.27	4000K	4220.68	123.16
36W	34.27	5000K	4347.30	126.85
48W	46.6	3000K	5450.00	116.95
48W	46.6	4000K	5613.50	120.46
48W	46.6	5000K	5781.91	124.08
60W	56.83	3000K	6812.50	119.88
60W	56.83	4000K	7016.88	123.47
60W	56.83	5000K	7227.38	127.18
72W	67.26	3000K	8175.00	121.54
72W	67.26	4000K	8420.25	125.19
72W	67.26	5000K	8672.86	128.95
84W	81.55	3000K	9537.50	116.95
84W	81.55	4000K	9823.63	120.46
84W	81.55	5000K	10118.33	124.08
96W	92.21	3000K	10900.00	118.21
96W	92.21	4000K	11227.00	121.75
96W	92.21	5000K	11563.81	125.41

PRODUCT DIMENSIONS

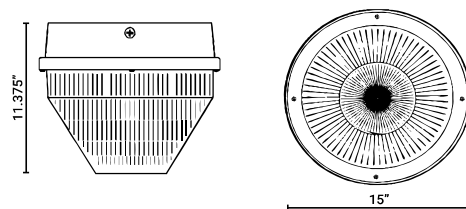

POWER

POWER FACTOR >0.90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.