

# PARAFLEX

*Fast Flexible Focused Lighting*

## SERIES-3300-POST TOP

**PFX-3302 Tunable**



### APPLICATIONS

	Street & Tunnel
	Park
	Gas Station
	Parking
	Industrial Site



PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

**A** 3 Luger Rd. #1 - Denville, NJ 07834

**E** [info@paraflex.com](mailto:info@paraflex.com)

**W** [www.paraflex.com](http://www.paraflex.com)

**P** 973-340-6040

 *Fast Flexible Focused Lighting*

### Product Description:



### Product Description:

This post top provides a subtle but stylish look for any job site. It is designed to save energy and reduce installation time. Optional photocontrol options allow for additional energy savings.

This post top is perfect for your architectural street lighting needs.

### Features:

#### LISTING

- UL and CUL listed for WET LOCATIONS.

#### HOUSING

- Corrosion resistant heavy duty-cast aluminum construction. Standard 3" open on the bottom. Pass 3 G vibration testing.
- Wiring Compartment on the Top for easy access and ease of installation.

#### FINISH

- Superior powder coat finish to withstand the toughest weather.
- Standard bronze with color options.

#### OPTIONS

- Optional 480V with adder
- Optional 180° Shield with adder



PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

### Product Description:


Model NO.	Nominal Watts	Lumen*	Efficacy*
PFX-3302	45 / 60 / 80W	9567 lm*	121.24 lm/w*
	100 / 125 / 160W	19220 lm*	121 lm/w*
*Lumen and Efficacy are based on the highest wattage at 5000K			

### Specification:

Example: PFX-3302

Model No.	Nominal Watts	Input Voltage	CRI	Color Temp	Distribution	Option	Finish	Starting Temp
						Accessories		
PFX-3302	80=80W 160=160W	UNV=120-277V HV4=277-480V	8=80+	TX = 3000K 4000K 5000K	T5=Type VS	OS=Occupancy Sensor HSS=180° Shield	BN=Bronze BK=Black SL=Silver WH=White	-40°C

### Dimension:

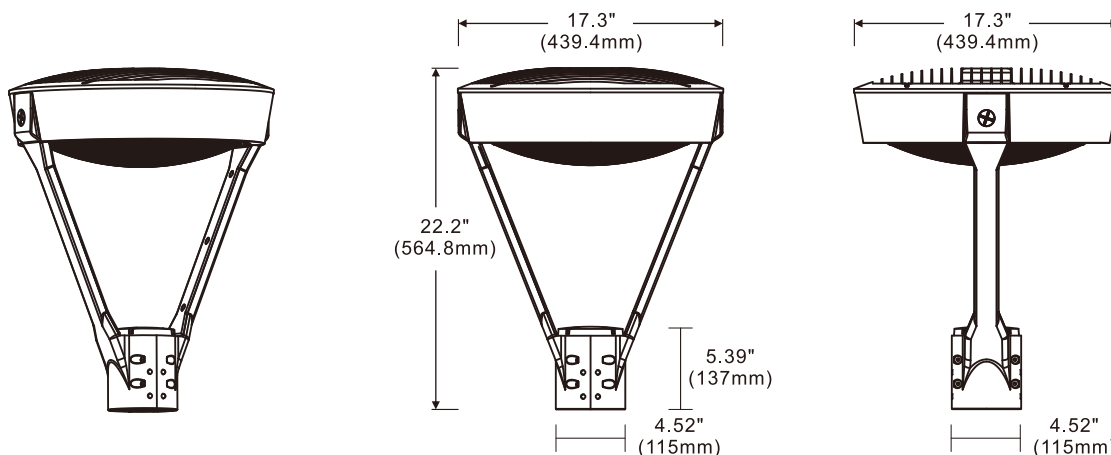

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.