


PARAFLEX

Fast Flexible Focused Lighting

STRIP LIGHTING

PFX-5302-ST-P

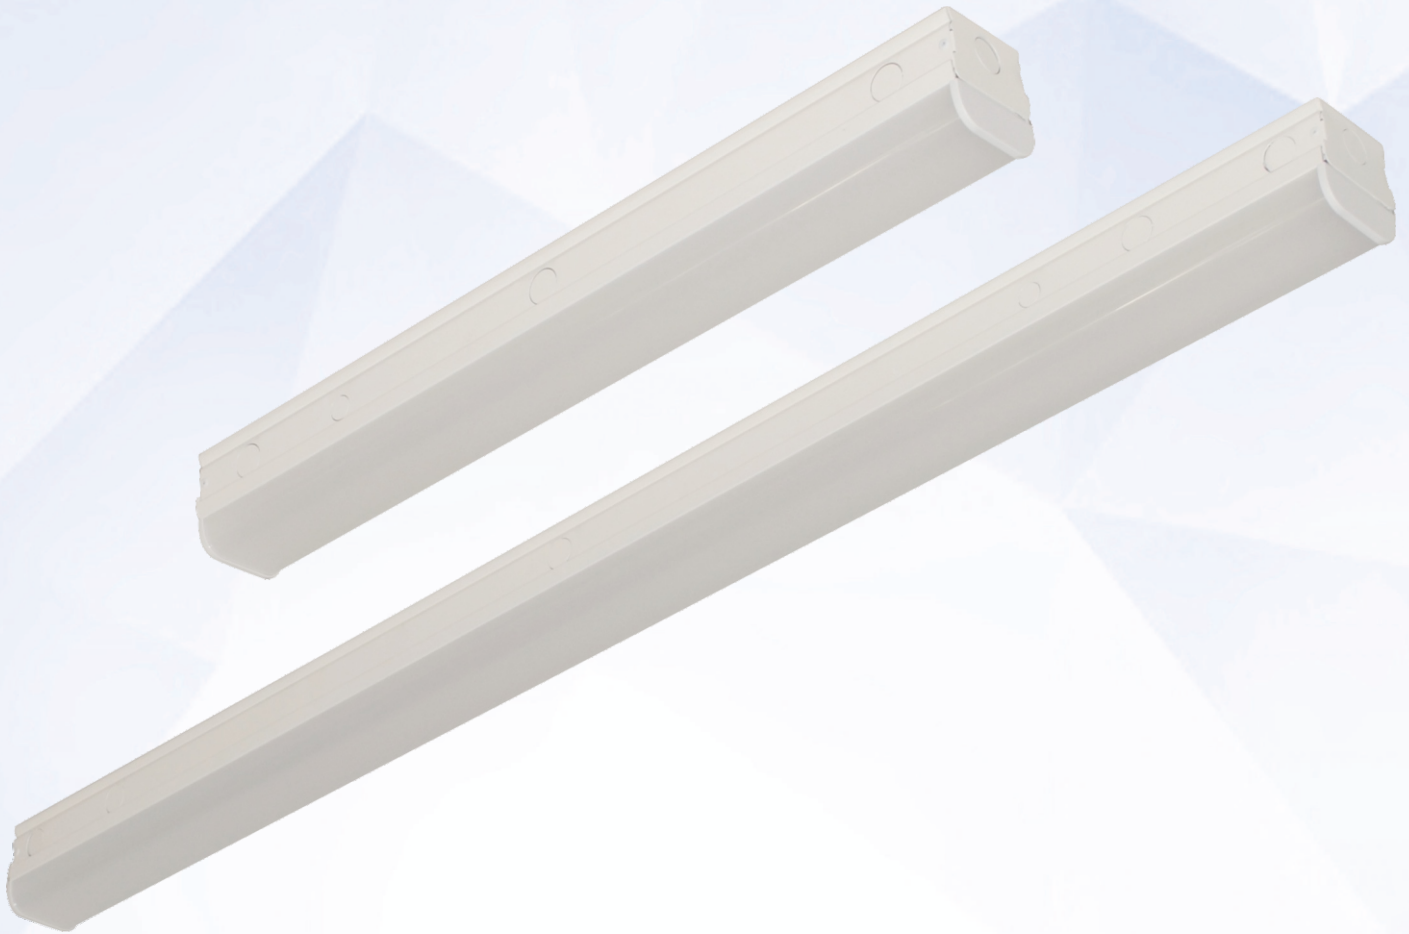

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

A 3 Luger Rd. #1 - Denville, NJ 07834

E info@paraflex.com

W www.paraflex.com

P 973-340-6040

 *Fast Flexible Focused Lighting*

Product Description:

Keyholes slots for surface mounting


Diffuse lens for wide coverage

Conduit knockouts for thru wiring



Patented Smart Controller
*(Exclusive for 2ft ST)


Dimmable LED driver with
wattage and CCT tunable
*(Exclusive for 4ft ST)



Optional 4W Emergency Driver



Optional externally mounted
occupancy sensor

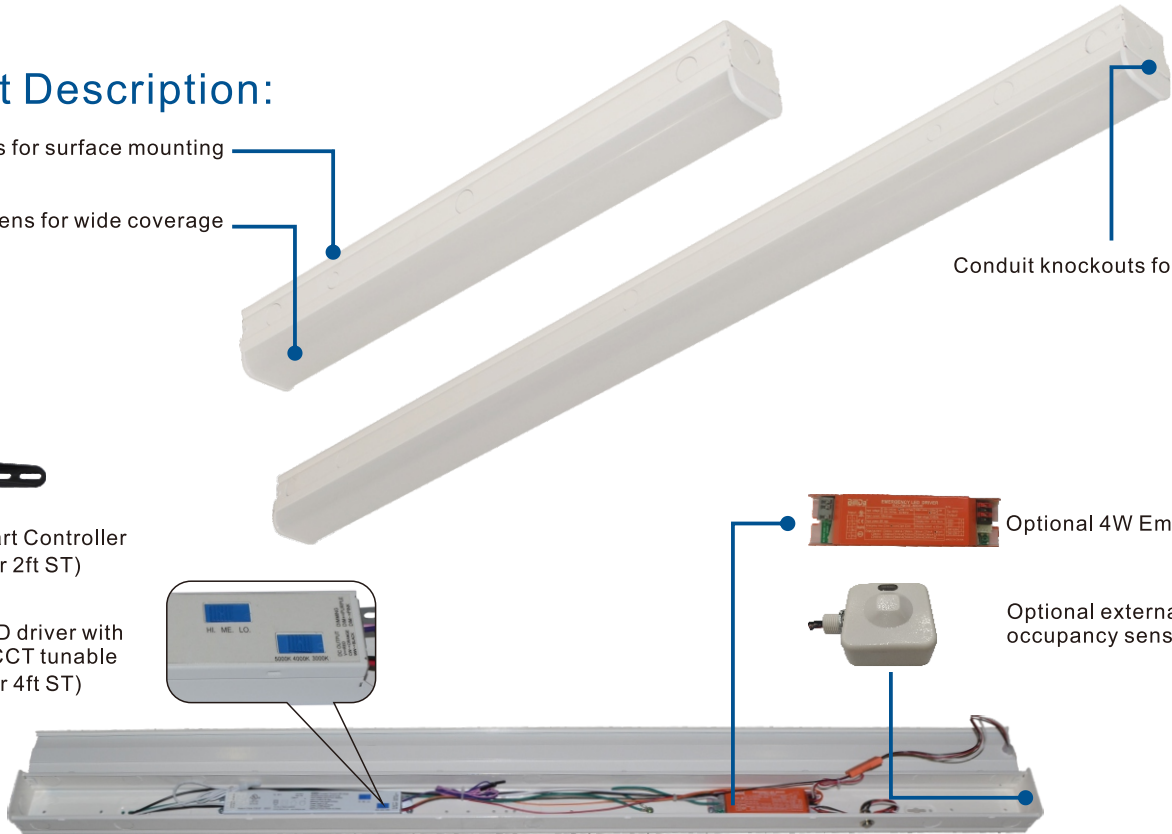

Product Description:

With its slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, meeting rooms, and workshops.

Features:

LISTING

- ▶ UL and CUL listed

HOUSING

- ▶ Housing made of high quality steel with high reflectance paint, providing high lumen output.

AMBIENT TEMPERATURE

- ▶ Suitable for use in -40°C to +40°C

EFFICACY

- ▶ Up to 130 lumens per watt (see individual wattage data)

CCT AND CRI

- ▶ 3000K, 4000K and 5000K CCT available, 80CRI

LENS

- ▶ Precision and high reflectance lens producing superior uniformity

ELECTRICAL

- ▶ Voltage: 120-277V standard, Class 2 constant current Drivers with 90% power factor, <20% THD. Driver efficiency (>90% standard);50/60Hz;
- ▶ 2KV-4KV Surge.
- ▶ Dimming 0-10V driver Standard.
- ▶ Occupancy sensor (PIR) optional.

FINISHES

- ▶ Polyester powder white finish, Multi-stage process produces 3mil thickness for superior corrosion and maximum environmental durability.



PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Performance Data

Model NO.	System Watts	Lumens*	Efficacy*	Linkable
PFX-5302-ST2-20P	20W	2608 lm*	131 lm/W*	2ft
PFX-5302-ST4-45P	22/33/45W	5467 lm*	123 lm/W*	4ft connect up to 8ft

*Lumen and efficacy are based on highest wattage 5000K

Specification:


Example: PFX-5302-ST2-20P

Model No.	System Watts	Input Voltage	CRI	Color Temp	Finish	Option
PFX-5302-ST2-20P	20W	UNV= 120-277VAC	8=80+	30=3000 K	WH=White	FAO = Tunable Smart Controller
PFX-5302-ST4-45P	22W 33W 45W			40= 4000 K 50=5000 K		BLANK = No Sensor OS =Occupancy Sensor EM = Emergency Driver




* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Dimension:




PFX-5302-ST2-20P






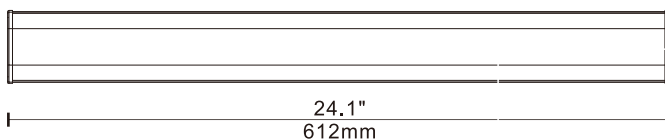



PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Dimension:

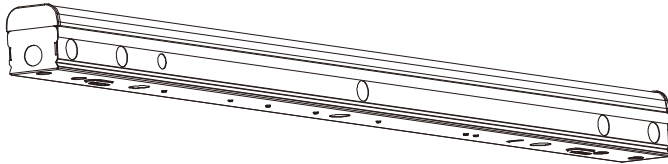

PFX-5302-ST4-45P

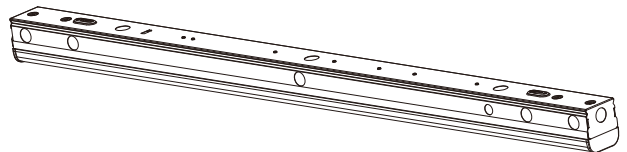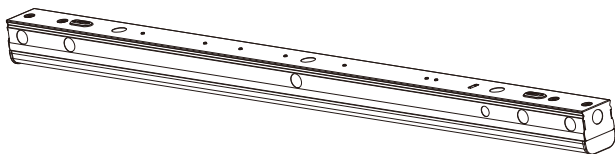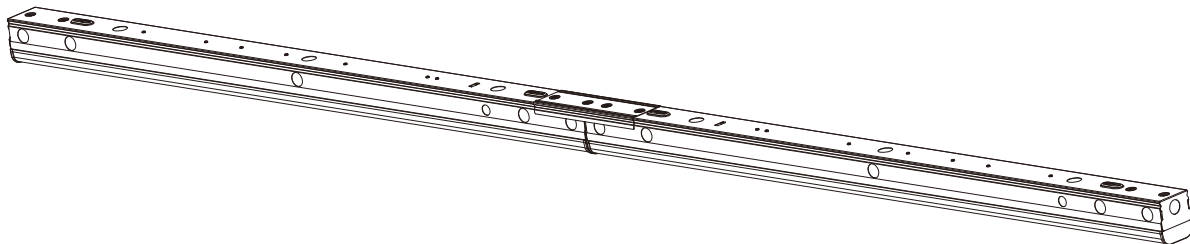

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.