

# Model Number

# PFX-5514 Compact Wet Location Polycarbonate Exit Sign

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	



## STANDARD



## OPTIONAL



### ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

### ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Polycarbonate mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

### HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.


### OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C-120V/2C-277V: Dual circuit option on the AC-only unit enables it to be connected to two different power supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- Custom: Signs available with requested "special" wording.

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (-20°C – 50°C).
- Certified to CEC under Title 20 Regulations.

### DIMENSIONS

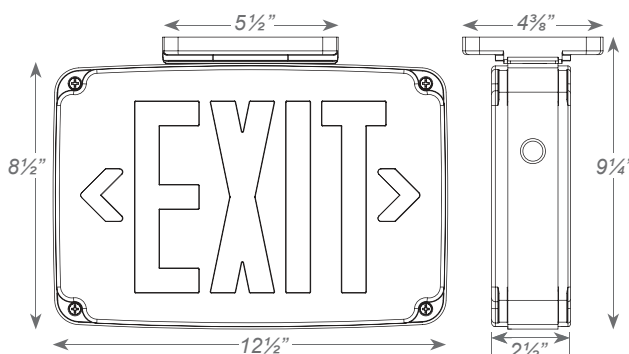

### ORDERING INFORMATION

Sample Part Number: **PFX5514WLEZXTEU1RWEM-CW**

	MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
Special voltage & SALIDA face plate options available. Check with Factory.	PFX5514	1	Single Face	R Red	W White (with white faceplate)	(blank) AC-Only
	WLEZXTEU	2	Double Face	G Green	B Black (with black faceplate)	EM-CW Battery Backup (Cold Weather Standard)
Available only with EM units.				G Gray (with white faceplate)		SDT Self-Diagnostics <sup>1</sup>
<sup>1</sup> Available only with AC units.						2C-120 Dual Circuit with 120V input <sup>2</sup>
<sup>2</sup>						2C-277 Dual Circuit with 277V input <sup>2</sup>
						TP Tamper-Proof
						CUSTOM Custom Wording

# PFX-5514

Compact Wet Location  
Polycarbonate Exit Sign

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
PFX5514WLEZXTEU-RED/GREEN	2.7	2.7	0.025	0.011
PFX5514WLEZXTEU-RED/GREEN/EM/SDT	3.3	3.4	0.030	0.014
PFX5514WLEZXTEU-RED/GREEN-2C	2.4	2.4	0.023	0.011