

# PARAFLEX

*Fast Flexible Focused Lighting*

## SERIES-3400-BOLLARDS

**PFX-3405 PL and CL**



### APPLICATIONS

	Hotels
	Commercial Buildings
	Schools & Colleges



#### Product Description:



PFX-3405CL



PFX-3405PL



PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

### Product Description:

This attractive, newly redesigned heavy-duty bollard features full proof aluminum construction housing, providing corrosion and vandal resistance ideal for lighting pedestrian walkways, as well as accenting the exterior grounds of office and apartment buildings, hotel and parks. A solid foundation withstands the elements, driver options work in even the worst weather conditions.

### Features:

**LISTING**

UL and CUL listed for wet locations

**HOUSING**

Consisting of an extruded aluminium alloy body

Standard 4kV Surge

**FINISH**

UV stabilized powder coated finish

**LENS**

High-impact polycarbonate diffuser

**OPTIONS**

Anodized aluminum reflector

Finish - Bronze

### Performance Data

Model NO.	System Watts	Dist. Type	Lumens	Lpw	B	U	G
PFX-3405	18 W	Type V	2035 lm**	111 lm/W	1	3	2
	36 W	Type V	3960 lm**	110 lm/W	1	3	2

### Specification:



Example: PFX-3405

Model No.	SystemWatts	Input Voltage	CRI	Color Temp	Option	Feature	Finish	Starting Temp
PFX-3405	018=18W	UNV=120-277V	7=70+	40=4000 K	XS= 10kV Surge	C =Cylinder	Bronze	-40°C ~ +50°C
	036=36W			50=5000 K	2S= 20kV Surge	S =Sphere		



\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

#### Dimension:

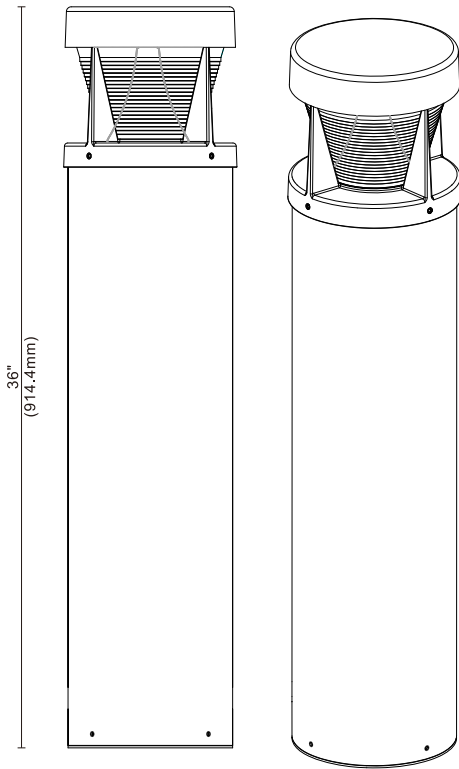

PFX-3405PL

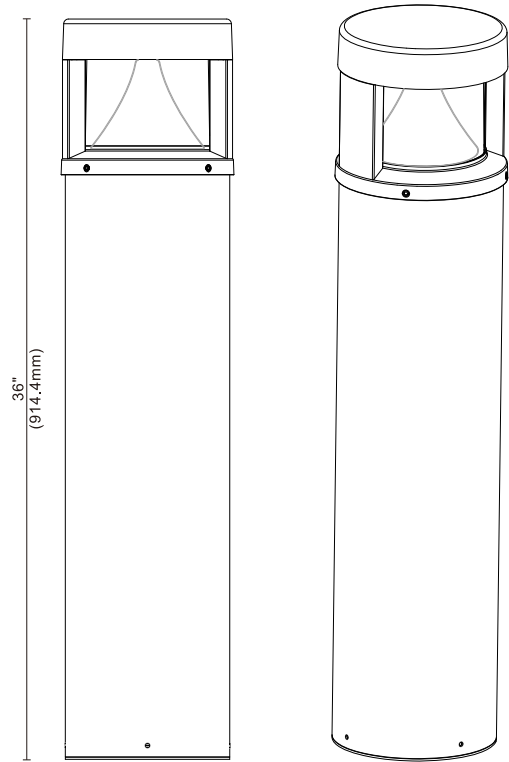

PFX-3405CL

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.