

PFX-5503 Thin Thermoplastic Exit Sign



Project:	
Type:	
Catalog #:	

STANDARD



U.S. Patent No.#'s:
9,990,868
D825,003

ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Specification-grade, low profile thin plastic design.
- EZ snap-out Chevron directional indicators.
- Patented, field selectable universal single / double face configuration.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

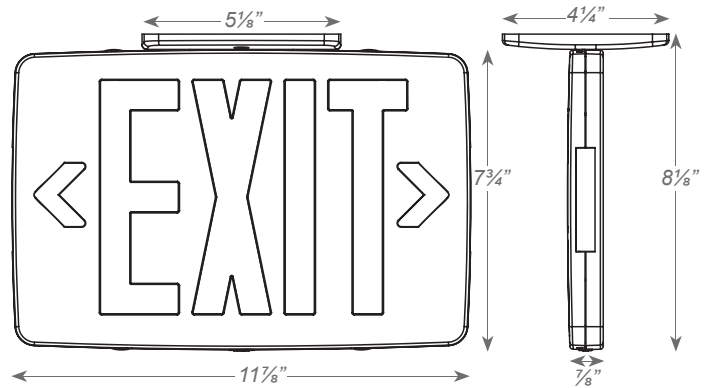

ORDERING INFORMATION

Sample Part Number: **PFX5503ETXTEU3RWEM**

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY
PFX5503 ETXTEU	3	Universal Single/ Double Face	R Red W White B Black	(blank) AC-Only EM Battery Backup
			G Green	

Model Number

PFX-5503 Thin Thermoplastic Exit Sign

Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
PFX5503ETXTEU	1.0	1.0	0.10	0.10