


# LED BACK-LIT PANEL

[PFX-5115 SERIES]

**PARAFLEX**  
Fast Flexible Focused Lighting

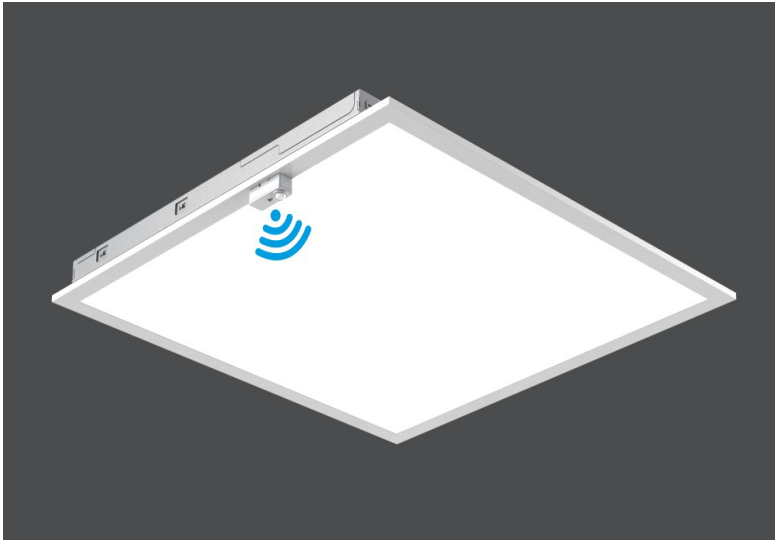

## Features

- 9 in 1 (3CCTs and 3 wattages selectable), less SKU.
- Back-lit emitting, PMMA lens.
- Easy plug in sensor, NLC 5.0 Listed, PIR/Microwave/Bluetooth Sensor optional.
- Ultra slim design, only 34mm height, shipping cost effective.
- Integrated earthquake hook, recessed and suspension installation supportable.
- Factory or Field Install EB available, 90 mins backup time, Integrated test button, easy installation.

## SPECIFICATION

### CONSTRUCTION

- Aluminum frame in white finish, Steel frame optional.  
steel die-formed back

### OPTICS

- PMMA lenses over LEDs, PS diffuser
- CCT: 3500K-4000K-5000K, SDCM < 4
- 120° Beam angle

### ELECTRICAL

- 0-10VDC Dimming (5%-100%)
- 120-277VAC or 120-34VAC Input
- PF: > 0.9, THD: < 20%

### NETWORKED LIGHTING CONTROLS

- QPL Name: Sharkward, Product ID: NSHRKWR20ZP

### WARRANTY

- 5 Years

### INSTALLATION


- Recessed in T-bar grid ceiling with integral earthquake clips for secure attachment enclosure
- Surface mount and suspension mount cable kit accessories available

### CERTIFICATIONS

- UL Listed for Damp Locations
- DLC PREMIUM & STANDARD
- IC Rated for insulated ceilings
- -20°C to 40°C (-4°F to 104°F)
- RoHS, FCC



## DIMENSIONS



Size (FT)	LxWxH
2x2	23.74"x23.74"x1.65"
1x4	47.76"x11.93"x1.65"
2x4	47.76"x23.74"x1.65"


PRODUCT SERIES	SIZE	VOLTAGE	EFFICACY	WATTAGE	CRI	SENSOR OPTION	EB DRIVER OPTION
PFX-5115	22	U	P	30	80	Blank	EB
PFX-5115	22	U=120-277V H=120-347V	P=Premium (125lm/w)	30W (18/24/30W)	80	Blank=Without sensor P=with PIR Sensor M=with Motion Sensor B=with Bluetooth Sensor L=with Bluetooth+ PIR Sensor	Blank =without Emergency Backup  EB=with Emergency Backup
	28W (18/24/28W)			80			
	45W (30/40/45W)			80			

**PARAMETERS**

MODEL NUMBER	SIZE (FT)	VOLTAGE (V)	WATTAGE (W)	EFFICACY (LPW)	LUMEN (LM)	CCT (K)	WEIGHT (lbs)
PFX-5115-22-U-P-30-80-W-Y	2' x 2'	120-277V	18/24/30	125	2250/3000/3750	3500K 4000K 5000K	4.34
PFX-5115-14-U-P-28-80-W-Y	1' x 4'		18/24/28	125	2250/3000/3500		4.76
PFX-5115-24-U-P-45-80-W-Y	2' x 4'		30/40/45	125	3750/5000/5625		9.04
PFX-5115-22-H-P-30-80-W-Y	2' x 2'	120-347V	18/24/30	125	2250/3000/3750	3500K 4000K 5000K	4.34
PFX-5115-14-H-P-28-80-W-Y	1' x 4'		18/24/28	125	2250/3000/3500		4.76
PFX-5115-24-H-P-45-80-W-Y	2' x 4'		30/40/45	125	3750/5000/5625		9.04


Note:W can be Blank/A/P/M/B/L, Y can be Blank/EB

**PHOTOMETRY**



**MOUNTINGS/ACCESSORIES**

**SURFACE MOUNT KITS**

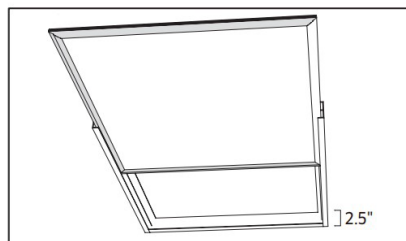

- 5115-SMF-14-W**  
1x4 Surface Mount Kit, White
- 5115-SMF-24-W**  
2x4 Surface Mount Kit, White
- 5115-SMF-22-W**  
2x2 Surface Mount Kit, White