

Model Number

PFX-3515

DOCK LIGHT

PARAFLEX
Fast Flexible Focused Lighting

PROJECT		DATE		TYPE	
NOTES					

REV: 06 2021



HEAVY-DUTY HOUSING

The PFX-3515 is Impact & weather resistant fixture with dia cast housing and tempered glass lenses

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The PFX-3515 has optional wall mount arm with length 42"

INDIVIDUAL OPTICS FOR CONTROLLED BEAM

HIGH QUALITY CHIP AND DRIVER AT 5 YEAR WARRANTY

120V STANDARD

OPERATING TEMPERATURE -30C TO 40C

PRODUCT APPLICATIONS




Dock Area
Tunnels

ORDERING GUIDE

Sample Part # PFX-3515-23W-40K-V7-YE-WG

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	VOLTAGE	HOUSING COLOR	OPTIONS & ACCESSORIES
PFX-3515	23W 23 WATTS	40K 4000K-NEUTRAL WHITE	V7 120 VOLTS	YE YELLOW	WG WIRE GUARD ST STANDARD ARM 42" DOCK LIGHT ARM

PRODUCT DIMENSION

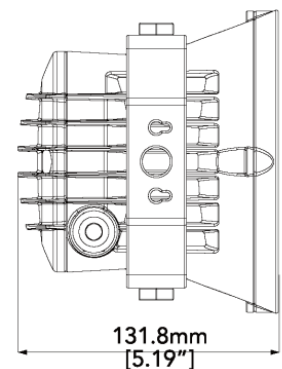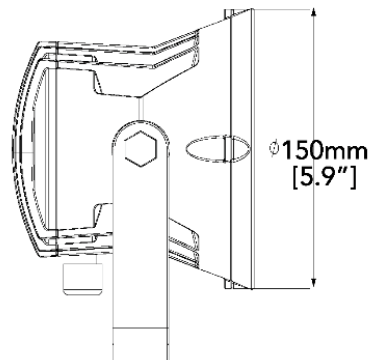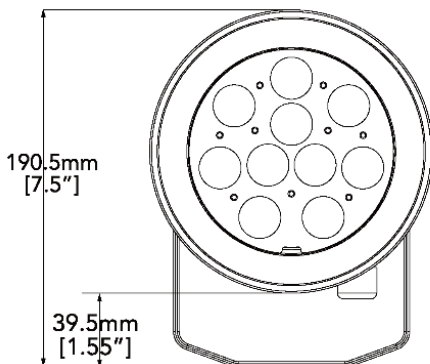

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Model Number

PFX-3515

DOCK LIGHT


PARAFLEX
Fast Flexible Focused Lighting

PRODUCT SPECIFICATIONS

SYSTEM WATTAGE	LUMENS	EFFICACY	INPUT VOLTAGE	CCT	CRI	WEIGHT	AMBIENT TEMP.	LED PERFORMANCE
23W	2900LM	UP TO 126 LPW	120V	4000K	>70	3.85lbs	-30 - 40°C	L70 > 5000h

PHOTOMETRY

PFX-3515-23W-2HX2V
Mounting Height = 10.00FT

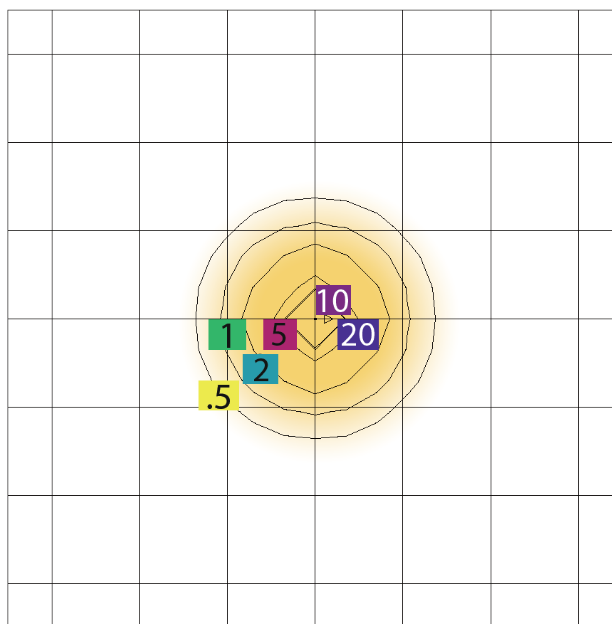

SCALE: 1 INCH = 10FT.
LIGHT LOSS FACTOR = 1.00

MAXIMUM CALCULATED VALUE=237.42 FC
FOOT CANDLE = .5 1 2 5 10 20

MOUNTINGS/ ACCESSPROES

DOCK LIGHT ARM - 42"



PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.