

DC200-90

CUT-OFF LED WALLPACK LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 06 2021



When Specifying Options, Please Check with Factory for Availability and Lead-Time. Any finish other than Paraflex bronze order is non-cancelable and non-returnable. Any modified product, any selected options added to standard products, deem order non-cancelable and non-returnable. All RMA, Return Material Authorization, must be factory approved.

FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC200-90 is a Large 18" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC200-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for PhotoCells & other Components

120-277V STANDARD TYPE VS DISTRIBUTION OPERATING TEMPERATURE -20C TO 40C

0C - 40C with EM Pack Option

PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

ORDERING GUIDE

Sample Part # DC200-90 - 12W - 35K - BZ - PC1 - D1


MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC200-90				
12W	12 WATTS	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
24W	24 WATTS	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
36W	36 WATTS	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
48W	48 WATTS	40K 4000K - NEUTRAL WHITE	SL SILVER	MS-D2 MOTION SENSOR WITH BILEVEL DIMMING
60W	60 WATTS	50K 5000K - COOL WHITE	CC CUSTOM COLOR	D1 0-10V DIMMING
72W	72 WATTS*	57K 5700K - DAYLIGHT		D2 STEP DIMMING (120V ONLY)
84W	84 WATTS*			EM EMERGENCY BATTERY PACK
96W	96 WATTS*			V1* 480/347V INPUT (120-277V STANDARD)

*NOT AVAILABLE WITH EM, PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC V5.0 LISTING
12W	12.65	3000K	1,530.00	120.95	PREMIUM
12W	12.65	4000K	1,606.50	127.00	PREMIUM
12W	12.65	5000K	1,686.83	133.35	PREMIUM
24W	23.68	3000K	3,060.00	129.22	PREMIUM
24W	23.68	4000K	3,213.00	135.68	PREMIUM
24W	23.68	5000K	3,373.65	142.47	PREMIUM
36W	34.27	3000K	4,008.38	116.96	PREMIUM
36W	34.27	4000K	4,208.79	122.81	PREMIUM
36W	34.27	5000K	4,419.23	128.95	PREMIUM
48W	45.80	3000K	5,344.50	116.69	PREMIUM
48W	45.80	4000K	5,611.73	122.53	PREMIUM
48W	45.80	5000K	5,892.31	128.65	PREMIUM
60W	56.83	3000K	6,680.63	117.55	PREMIUM
60W	56.83	4000K	7,014.66	123.43	PREMIUM
60W	56.83	5000K	7,365.39	129.60	PREMIUM
72W	67.65	3000K	8,016.75	118.50	STANDARD
72W	67.65	4000K	8,417.59	124.43	STANDARD
72W	67.65	5000K	8,838.47	130.65	STANDARD
84W	80.12	3000K	9,352.88	116.74	STANDARD
84W	80.12	4000K	9,820.52	122.57	STANDARD
84W	80.12	5000K	10,311.54	128.70	STANDARD
96W	91.65	3000K	10,689.00	116.63	STANDARD
96W	91.65	4000K	11,223.45	122.46	STANDARD
96W	91.65	5000K	11,784.62	128.58	STANDARD

PRODUCT DIMENSIONS

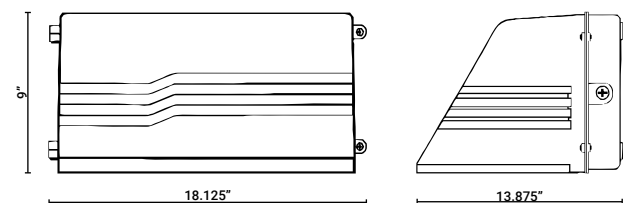

POWER

POWER FACTOR >0.90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.