

C08

CYLINDER SCONCE



PROJECT
NOTES

DATE

TYPE

REV: 03 2020



IP65 RATED HOUSING

The Cylinder Sconce is a cylindrical wall fixture with a fabricated aluminum body and tempered glass lens. Available in a dark bronze power coat finish as standard.

WET LOCATION

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The Cylinder Sconce is Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry.

STANDARD

120V - 277V

TEMPERATURE

-20°C to 40°C Ambient

PRODUCT APPLICATIONS

Site Lighting
Walkways
Stairways

Bridges
Catwalks
Parking Areas

When Specifying Options. Please Check with Factory for Availability and Lead-Time

ORDERING GUIDE

Sample Part # C08 - S - 12W - 40K - BZ

STANDARD PRODUCT

MODEL	LAMPS	WATTAGE	CCT	HOUSING COLOR	OPTIONS
C08			40K	BZ	
S SINGLE	12W	12 Watts	40K 4000K	BZ BRONZE (STANDARD)	PC PHOTOCELL (120V-277V)
D DOUBLE	24W	(12W UP +12W down)			

CUSTOM ORDER

AVAILABLE ON REQUEST. CALL FACTORY FOR AVAILABILITY, LEADTIME & MINIMUM ORDER QUANTITY (MOQ)


MODEL	LAMPS	WATTAGE	CCT*	HOUSING COLOR	OPTIONS
C08					
S SINGLE	9W	9 Watts	30K 3000K	BZ BRONZE (STANDARD)	PC PHOTOCELL (120V-277V)
	15W	15 Watts	40K 4000K	BL BLACK	
	20W	20 Watts	50K 5000K	CC CUSTOM COLOR	
			57K 5700K		
D DOUBLE	18W	(9W UP + 9W down)			
	30W	(15W UP + 15W down)			
	40W	(20W UP + 20W down)			

*No Up/Down Color Combinations

C08

CYLINDER SCONCE

PRODUCT SPECIFICATIONS

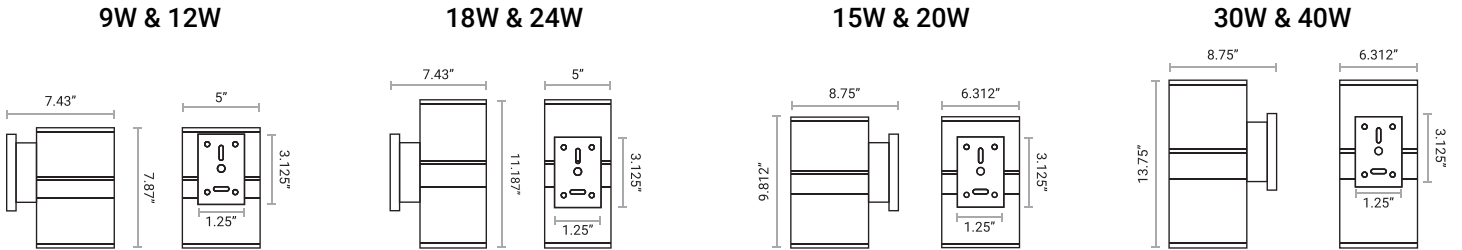

ITEM	SPECIFICATION	DETAILS							
		9W	12W	18W	24W	15W	20W	30W	40W
GENERAL PERFORMANCE	Input Power (W)	9W	12W	18W	24W	15W	20W	30W	40W
	Lumens Delivered (lm) at 4000K	810	1080	1620	2160	1350	1800	2700	3600
	Efficacy (lm/W)	90							
	CRI	≥80							
	Lumen Maintenance (L70, TM-21 @ 25°C)	L90 > 36,000 hours L70 ≥ 50,000 hours							
Color Consistency	Proprietary binning for uniform color								
ELECTRICAL	Input Voltage	120-240/277V							
	Power Factor (120V / 277V)	≥0.95							
PHYSICAL	Weight	3.5 Lbs		4.4 Lbs		3.5 Lbs		4.4 Lbs	
	Housing	Extruded Aluminum							
	Lens / Reflector	Glass Cover							
	Mounting	Wall Mounting							
	Humidity	20-85%, RH, non-condensing							