

# CV15G

LED CANOPY LUMINAIRE



PROJECT

DATE

TYPE

NOTES

REV: 18 1025

AVAILABLE IN QUICK SHIP



### COMPACT, HEAVY-DUTY HOUSING

The CV15G is a 15" Circular Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The CV15G can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

### 120-277V STANDARD

### TYPE VS DISTRIBUTION

### PRODUCT APPLICATIONS

- Building Canopy
- Parking Garages
- Tunnels
- Storage Facilities
- Gas Stations

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # CV15G - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CV15G	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING (120V ONLY)
	72W	55K 5500K - DAYLIGHT		EM EMERGENCY BATTERY PACK
	84W			V1* 480/347V INPUT (120-277V STANDARD)
	96W			*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

## PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY
12W	12.65	3000K	1362.50	107.71
12W	12.65	4000K	1403.38	110.94
12W	12.65	5000K	1445.48	114.27
24W	23.54	3000K	2725.00	115.76
24W	23.54	4000K	2806.75	119.23
24W	23.54	5000K	2890.95	122.81
36W	34.27	3000K	4097.74	119.57
36W	34.27	4000K	4220.68	123.16
36W	34.27	5000K	4347.30	126.85
48W	46.6	3000K	5450.00	116.95
48W	46.6	4000K	5613.50	120.46
48W	46.6	5000K	5781.91	124.08
60W	56.83	3000K	6812.50	119.88
60W	56.83	4000K	7016.88	123.47
60W	56.83	5000K	7227.38	127.18
72W	67.26	3000K	8175.00	121.54
72W	67.26	4000K	8420.25	125.19
72W	67.26	5000K	8672.86	128.95
84W	81.55	3000K	9537.50	116.95
84W	81.55	4000K	9823.63	120.46
84W	81.55	5000K	10118.33	124.08
96W	92.21	3000K	10900.00	118.21
96W	92.21	4000K	11227.00	121.75
96W	92.21	5000K	11563.81	125.41

## PRODUCT DIMENSIONS

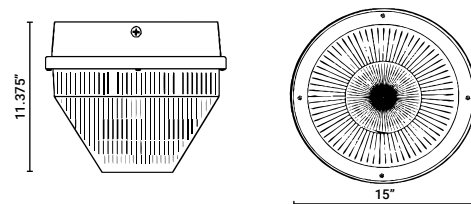

## POWER

POWER FACTOR >0.90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.