

# CV304

LED CANOPY LUMINAIRE



PROJECT

DATE

TYPE

NOTES

REV: 18 1025

AVAILABLE IN QUICK SHIP



### COMPACT, HEAVY-DUTY HOUSING

The CV304 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The CV304 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

### 120-277V STANDARD

### TYPE VS DISTRIBUTION

### PRODUCT APPLICATIONS

- Building Canopy
- Parking Garages
- Tunnels
- Storage Facilities
- Gas Stations

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # CV304 - 24W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CV304	24W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	36W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	48W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
	60W	40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
	72W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING (120V ONLY)
				EM EMERGENCY BATTERY PACK
	55K 5500K - DAYLIGHT		V1* 480/347V INPUT (120-277V STANDARD)	
				*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

## PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
24W	23.54	3000K	2,875.45	122.15	PREMIUM
24W	23.54	4000K	2,961.71	125.82	PREMIUM
24W	23.54	5000K	3,050.57	129.59	PREMIUM
36W	34.27	3000K	4,186.14	122.15	PREMIUM
36W	34.27	4000K	4,311.72	125.82	PREMIUM
36W	34.27	5000K	4,441.07	129.59	PREMIUM
48W	46.60	3000K	5,692.27	122.15	PREMIUM
48W	46.60	4000K	5,863.04	125.82	PREMIUM
48W	46.60	5000K	6,038.93	129.59	PREMIUM
60W	56.83	3000K	6,941.88	122.15	PREMIUM
60W	56.83	4000K	7,150.14	125.82	PREMIUM
60W	56.83	5000K	7,364.64	129.59	PREMIUM
72W	67.26	3000K	8,215.92	122.15	PREMIUM
72W	67.26	4000K	8,462.40	125.82	PREMIUM
72W	67.26	5000K	8,716.27	129.59	PREMIUM

## PRODUCT DIMENSIONS

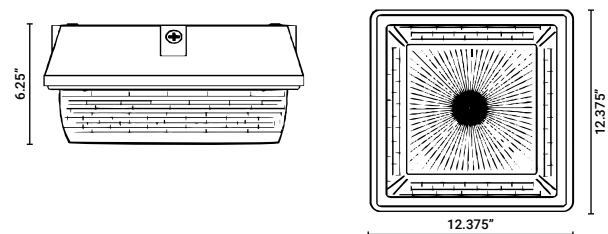

## POWER

POWER FACTOR >0.90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.