

DC102

LED WALLPACK LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 03 2020



COMPACT, HEAVY-DUTY HOUSING

The DC102 is a Small 9" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC102 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD TYPE IV DISTRIBUTION

OPERATING TEMPERATURE -20C TO 40C

PRODUCT APPLICATIONS

- Building Entrances
- Bridges
- Walkways
- Catwalks
- Tunnels
- Stairwells
- Loading Docks
- Building Exteriors

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

ORDERING GUIDE


Sample Part # DC102 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC102	12W 12 WATTS 24W 24 WATTS 36W 36 WATTS	27K 2700K - WARM WHITE 30K 3000K - WARM WHITE 35K 3500K - NEUTRAL WHITE 40K 4000K - NEUTRAL WHITE 50K 5000K - COOL WHITE 55K 5500K - DAYLIGHT	BZ BRONZE (STANDARD) WH WHITE BL BLACK SL SILVER CC CUSTOM COLOR	PC1 120V PHOTOCELL PC2 208/277V PHOTOCELL MS MOTION SENSOR MS-D2 MOTION SENSOR WITH BILEVEL DIMMING D1 0-10V DIMMING D2 STEP DIMMING (120V ONLY) V1* 480/347V INPUT (120-277V STANDARD) <small>*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR</small>

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.72	3000K	1,393.50	109.55	STANDARD
12W	12.72	4000K	1,463.18	115.03	STANDARD
12W	12.72	5000K	1,536.33	120.78	STANDARD
24W	23.57	3000K	2,787.00	118.24	STANDARD
24W	23.57	4000K	2,926.35	124.16	STANDARD
24W	23.57	5000K	3,072.67	130.36	STANDARD
36W	34.27	3000K	4,180.50	121.99	STANDARD
36W	34.27	4000K	4,389.53	128.09	STANDARD
36W	34.27	5000K	4,609.00	134.49	STANDARD

PRODUCT DIMENSIONS

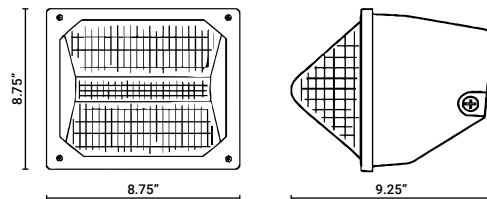

POWER

POWER FACTOR >0.90 - THD <20