

DC160-90

CUT-OFF LED WALLPACK LUMINAIRE

PROJECT
NOTES

DATE

TYPE



REV: 03 2020



FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC160-90 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC160-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD

OPERATING TEMPERATURE -20°C TO 40°C

PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

When Specifying Options, Please Check with Factory for Availability and Lead-Time.


ORDERING GUIDE

Sample Part # DC160-90 - 45W - 40K - T2 - BZ - PC

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTICS	HOUSING COLOR	OPTIONS & ACCESSORIES
DC160-90				BZ	
	40W 40 WATTS	40K 4000K - NEUTRAL WHITE	T2 TYPE II	BZ BRONZE (STANDARD)	PC 120V-277V PHOTOCELL
	60W 60 WATTS	50K 5000K - COOL WHITE	T3 TYPE III T4 TYPE IV		V1* 480/347V INPUT (120-277V STANDARD) *NOT AVAILABLE WITH A PHOTOCELL

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	LUMENS	EFFICACY
40W	4,800	120
60W	7,200	120

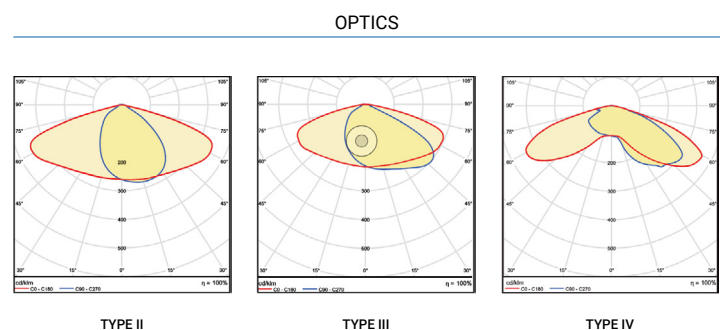

PRODUCT DIMENSIONS

