

DC200-90

CUT-OFF LED WALLPACK LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 18 1025

AVAILABLE IN QUICK SHIP



FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC200-90 is a Large 18" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC200-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD TYPE VS DISTRIBUTION

PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

ORDERING GUIDE


Sample Part # DC200-90 - 12W - 35K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT) | HOUSING COLOR | OPTIONS & ACCESSORIES |
|----------|---------|---------------------------|----------------------|--|
| DC200-90 | | | | |
| | 12W | 27K 2700K - WARM WHITE | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL |
| | 24W | 30K 3000K - WARM WHITE | WH WHITE | PC2 208/277V PHOTOCELL |
| | 36W | 35K 3500K - NEUTRAL WHITE | BL BLACK | MS MOTION SENSOR |
| | 48W | 40K 4000K - NEUTRAL WHITE | SL SILVER | D1 0-10V DIMMING |
| | 60W | 50K 5000K - COOL WHITE | CC CUSTOM COLOR | D2 STEP DIMMING (120V ONLY) |
| | 72W | 55K 5500K - DAYLIGHT | | EM EMERGENCY BATTERY PACK |
| | 84W | | | V1* 480/347V INPUT (120-277V STANDARD) |
| | 96W | | | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT | LUMENS | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|-----------|----------|-------------|
| 12W | 12.65 | 3000K | 1,530.00 | 120.95 | PREMIUM |
| 12W | 12.65 | 4000K | 1,606.50 | 127.00 | PREMIUM |
| 12W | 12.65 | 5000K | 1,686.83 | 133.35 | PREMIUM |
| 24W | 23.68 | 3000K | 3,060.00 | 129.22 | PREMIUM |
| 24W | 23.68 | 4000K | 3,213.00 | 135.68 | PREMIUM |
| 24W | 23.68 | 5000K | 3,373.65 | 142.47 | PREMIUM |
| 36W | 34.27 | 3000K | 4,008.38 | 116.96 | PREMIUM |
| 36W | 34.27 | 4000K | 4,208.79 | 122.81 | PREMIUM |
| 36W | 34.27 | 5000K | 4,419.23 | 128.95 | PREMIUM |
| 48W | 45.80 | 3000K | 5,344.50 | 116.69 | PREMIUM |
| 48W | 45.80 | 4000K | 5,611.73 | 122.53 | PREMIUM |
| 48W | 45.80 | 5000K | 5,892.31 | 128.65 | PREMIUM |
| 60W | 56.83 | 3000K | 6,680.63 | 117.55 | PREMIUM |
| 60W | 56.83 | 4000K | 7,014.66 | 123.43 | PREMIUM |
| 60W | 56.83 | 5000K | 7,365.39 | 129.60 | PREMIUM |
| 72W | 67.65 | 3000K | 8,016.75 | 118.50 | STANDARD |
| 72W | 67.65 | 4000K | 8,417.59 | 124.43 | STANDARD |
| 72W | 67.65 | 5000K | 8,838.47 | 130.65 | STANDARD |
| 84W | 80.12 | 3000K | 9,352.88 | 116.74 | STANDARD |
| 84W | 80.12 | 4000K | 9,820.52 | 122.57 | STANDARD |
| 84W | 80.12 | 5000K | 10,311.54 | 128.70 | STANDARD |
| 96W | 91.65 | 3000K | 10,689.00 | 116.63 | STANDARD |
| 96W | 91.65 | 4000K | 11,223.45 | 122.46 | STANDARD |
| 96W | 91.65 | 5000K | 11,784.62 | 128.58 | STANDARD |

PRODUCT DIMENSIONS

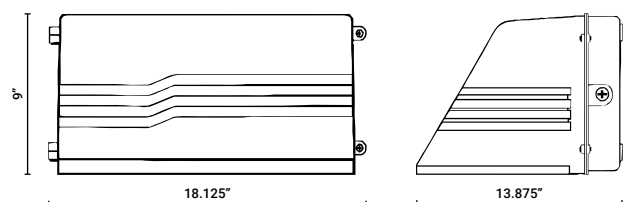

POWER

POWER FACTOR >0.90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.