

# DC200

LED WALLPACK LUMINAIRE



PROJECT

DATE

TYPE

NOTES

REV: 18 1025

AVAILABLE IN QUICK SHIP



### LARGE, HEAVY-DUTY HOUSING

The DC200 is a Large 18" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The DC200 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD    TYPE IV DISTRIBUTION

### PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DC200 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC200	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING (120V ONLY)
	72W	55K 5500K - DAYLIGHT		EM EMERGENCY BATTERY PACK
	84W			V1* 480/347V INPUT (120-277V STANDARD)
	96W			*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

## PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.72	3000K	1,480.50	116.39	STANDARD
12W	12.72	4000K	1,554.53	122.21	STANDARD
12W	12.72	5000K	1,632.25	128.32	STANDARD
24W	23.68	3000K	2,961.00	125.04	STANDARD
24W	23.68	4000K	3,109.05	131.29	STANDARD
24W	23.68	5000K	3,264.50	137.86	STANDARD
36W	34.27	3000K	4,441.50	129.60	STANDARD
36W	34.27	4000K	4,663.58	136.08	STANDARD
36W	34.27	5000K	4,896.75	142.89	STANDARD
48W	46.60	3000K	5,922.00	127.08	STANDARD
48W	46.60	4000K	6,218.10	133.44	STANDARD
48W	46.60	5000K	6,529.01	140.11	STANDARD
60W	56.83	3000K	7,402.50	130.26	STANDARD
60W	56.83	4000K	7,772.63	136.77	STANDARD
60W	56.83	5000K	8,161.26	143.61	STANDARD
72W	67.65	3000K	8,883.00	131.31	STANDARD
72W	67.65	4000K	9,327.15	137.87	STANDARD
72W	67.65	5000K	9,793.51	144.77	STANDARD
84W	81.55	3000K	10,363.50	127.08	NONE
84W	81.55	4000K	10,881.68	133.44	NONE
84W	81.55	5000K	11,425.76	140.11	NONE
96W	91.65	3000K	11,844.00	129.23	NONE
96W	91.65	4000K	12,436.20	135.69	NONE
96W	91.65	5000K	13,058.01	142.48	NONE

## PRODUCT DIMENSIONS

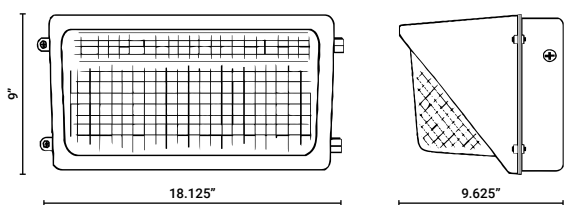

## POWER

POWER FACTOR >0.90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.