

# DC400

LED FLOODLIGHT LUMINAIRE



PROJECT

DATE

TYPE

NOTES

REV: 18 1025

AVAILABLE IN QUICK SHIP



### COMPACT, HEAVY-DUTY HOUSING

The DC400 is a 16"x 10" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### VERSATILE MOUNTING OPTIONS

The DC400 is available with Three Mounting Options: Trunnion, Slip-Fitter and Straight Arm

### 120-277V STANDARD TYPE VS DISTRIBUTION

### PRODUCT APPLICATIONS

- Parking Lots
- Walkways
- Buildings
- Signage
- Playgrounds
- Parks & Recreational Fields
- Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DC400 - 12W - 35K - BZ - SF - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	MOUNTING	OPTIONS & ACCESSORIES
DC400	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	NA NONE (BY OTHERS)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	TR TRUNNION MOUNT	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	SF SLIP-FITTER	MS MOTION SENSOR
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	ST STRAIGHT ARM	D1 0-10V DIMMING
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR		D2 STEP DIMMING (120V ONLY)
	72W	55K 5500K - DAYLIGHT			EM EMERGENCY BATTERY PACK
	84W				V1* 480/347V INPUT (120-277V STANDARD)
	96W				*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

## PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.40	3000K	1,333.00	107.59	PREMIUM
12W	12.72	4000K	1,399.65	110.04	PREMIUM
12W	12.72	5000K	1,469.63	115.54	PREMIUM
24W	23.68	3000K	2,636.25	111.33	PREMIUM
24W	23.68	4000K	2,768.06	116.89	PREMIUM
24W	23.68	5000K	2,906.47	122.74	PREMIUM
36W	34.27	3000K	3,954.38	115.39	PREMIUM
36W	34.27	4000K	4,152.09	121.16	PREMIUM
36W	34.27	5000K	4,359.70	127.22	PREMIUM
48W	46.60	3000K	5,633.00	120.88	PREMIUM
48W	46.60	4000K	5,914.65	126.92	PREMIUM
48W	46.60	5000K	6,210.38	133.27	PREMIUM
60W	56.83	3000K	6,823.00	120.06	PREMIUM
60W	56.83	4000K	7,164.15	126.06	PREMIUM
60W	56.83	5000K	7,522.36	132.37	PREMIUM
72W	67.65	3000K	8,122.05	120.06	PREMIUM
72W	67.65	4000K	8,528.15	126.06	STANDARD
72W	67.65	5000K	8,954.56	132.37	STANDARD
84W	80.26	3000K	9,636.00	120.06	STANDARD
84W	81.55	4000K	10,117.80	124.07	STANDARD
84W	81.55	5000K	10,623.70	130.27	STANDARD
96W	92.50	3000K	10,545.00	114.00	STANDARD
96W	91.65	4000K	11,310.00	123.40	STANDARD
96W	91.65	5000K	11,625.90	126.85	STANDARD

## PRODUCT DIMENSIONS

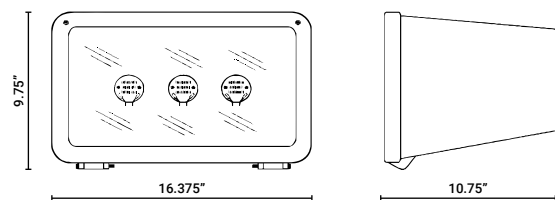

## POWER

POWER FACTOR >0.90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.