

# DC531

LED FLOODLIGHT LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 03 2020



**COMPACT, HEAVY-DUTY HOUSING**

The DC531 is a Small Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

**WET LOCATION, IP-65 RATED**

Engineered and Constructed for Exterior Environments

**EASY TO INSTALL MOUNTING**

The DC531 comes standard with an Integral 1/2" Male Threaded Mount with an Optional Post Top Fitter available

**120-277V STANDARD TYPE II DISTRIBUTION**

**OPERATING TEMPERATURE -20C TO 40C**

**PRODUCT APPLICATIONS**

- Parking Lots
- Walkways
- Buildings
- Signage
- Playgrounds
- Parks & Recreational Fields
- Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

**ORDERING GUIDE**


Sample Part # DC531 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC531	12W 12 WATTS 24W 24 WATTS 36W 36 WATTS	27K 2700K - WARM WHITE 30K 3000K - WARM WHITE 35K 3500K - NEUTRAL WHITE 40K 4000K - NEUTRAL WHITE 50K 5000K - COOL WHITE 55K 5500K - DAYLIGHT	BZ BRONZE (STANDARD) WH WHITE BL BLACK SL SILVER CC CUSTOM COLOR	MS MOTION SENSOR (12W & 24W ONLY) MS-D2 MOTION SENSOR WITH BILEVEL DIMMING D1 0-10V DIMMING D2 STEP DIMMING (120V ONLY) PT POST TOP FITTER V1* 480/347V INPUT (120-277V STANDARD) *NOT AVAILABLE WITH A MOTION SENSOR

**PRODUCT SPECIFICATIONS**

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.39	3000K	1,333.00	107.59	PREMIUM
12W	12.72	4000K	1,399.65	110.04	PREMIUM
12W	12.72	5000K	1,469.63	115.54	PREMIUM
24W	23.68	3000K	2,666.00	112.58	PREMIUM
24W	23.68	4000K	2,799.30	118.21	PREMIUM
24W	23.68	5000K	2,939.26	124.12	PREMIUM
36W	34.27	3000K	3,999.00	116.69	PREMIUM
36W	34.27	4000K	4,198.95	122.53	PREMIUM
36W	34.27	5000K	4,408.90	128.65	PREMIUM

**PRODUCT DIMENSIONS**

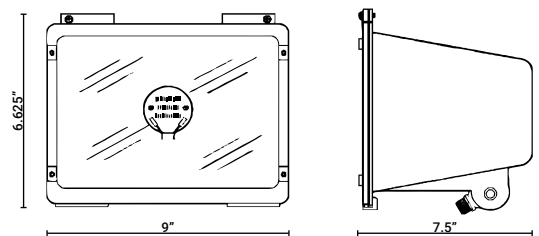

**POWER**

POWER FACTOR >0.90 - THD <20