

DC560

LED FLOODLIGHT LUMINAIRE

PROJECT
NOTES

DATE

TYPE



REV: 03 2020



COMPACT, HEAVY-DUTY HOUSING

The DC560 is a 12"x 8" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC560 comes standard with an Integral 1/2" Female Threaded Mount

120-277V STANDARD TYPE III DISTRIBUTION

OPERATING TEMPERATURE -20C TO 40C

PRODUCT APPLICATIONS

- Parking Lots
- Walkways
- Buildings
- Signage
- Playgrounds
- Parks & Recreational Fields
- Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

ORDERING GUIDE


Sample Part # DC560 - 12W - 35K - BZ - MS - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC560				
	12W 12 WATTS	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	MS MOTION SENSOR (12W & 24W ONLY)
	24W 24 WATTS	30K 3000K - WARM WHITE	WH WHITE	MS-D2 MOTION SENSOR WITH BILEVEL DIMMING
	36W 36 WATTS	35K 3500K - NEUTRAL WHITE	BL BLACK	D1 0-10V DIMMING
	48W 48 WATTS	40K 4000K - NEUTRAL WHITE	SL SILVER	D2 STEP DIMMING (120V ONLY)
		50K 5000K - COOL WHITE	CC CUSTOM COLOR	V1* 480/347V INPUT (120-277V STANDARD)
		55K 5500K - DAYLIGHT		*NOT AVAILABLE WITH A MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.73	3000K	1,487.00	116.81	PREMIUM
12W	12.72	4000K	1,561.35	122.75	PREMIUM
12W	12.72	5000K	1,639.42	128.89	PREMIUM
24W	23.68	3000K	2,974.00	125.59	PREMIUM
24W	23.68	4000K	3,122.70	131.87	PREMIUM
24W	23.68	5000K	3,278.83	138.46	PREMIUM
36W	34.27	3000K	4,461.00	130.17	PREMIUM
36W	34.27	4000K	4,684.05	136.68	PREMIUM
36W	34.27	5000K	4,918.25	143.51	PREMIUM
48W	46.60	3000K	5,948.00	127.64	PREMIUM
48W	46.60	4000K	6,245.40	134.02	PREMIUM
48W	46.60	5000K	6,557.67	140.72	PREMIUM

PRODUCT DIMENSIONS

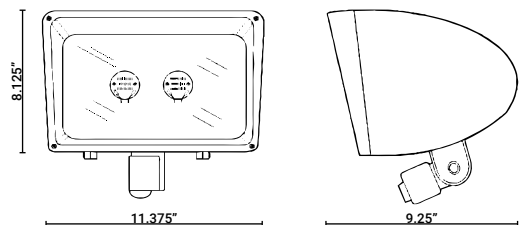

POWER

POWER FACTOR >0.90 - THD <20