

# WP290

LED WALLPACK LUMINAIRE



PROJECT  
NOTES

DATE

TYPE

REV: 03 2020



**COMPACT, DURABLE HOUSING**

The WP290 is a Small Wallpack with a Die Cast Aluminum Housing and Polycarbonate Lens

**WET LOCATION, IP-65 RATED**

Seamless Gasket Engineered to Prevent Leaks and Provide Installation within Exterior Environments

**INTEGRAL PHOTOCELL**

The WP290 was Engineered with a Integral Button Photocell

**120-277V STANDARD**

**PRODUCT APPLICATIONS**

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells
- Building Exteriors

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

**ORDERING GUIDE** Sample Part # WP290 - 20W - 50K - BZ - PC

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
WP290	20W 20 WATTS	30K 3000K WARM WHITE* 50K 5000K COOL WHITE *NOT DLC LISTED	BZ BRONZE (STANDARD)	PC 120V-277V BUTTON TYPE PHOTOCELL


**PRODUCT SPECIFICATIONS**

WATTAGE	CCT	DELIVERED LUMENS	EFFICACY	CRI
20W	3000K	2,381 LM	121 LM/W	>80
20W	5000K	2,472 LM	126 LM/W	>80

**DLC LISTINGS**

WP290 - 20W - 50K - BZ - PC

**PRODUCT DIMENSIONS**

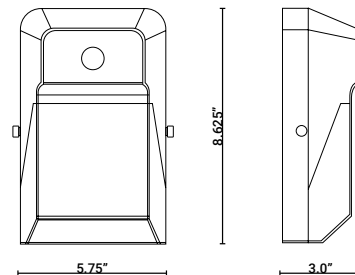

# WP290

LED WALLPACK LUMINAIRE

**PARAFLEX**  
Fast Flexible Focused Lighting

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

## PRODUCT SPECIFICATIONS (CONT.)

### HOUSING CONSTRUCTION

Heavy Duty Die Cast Aluminum Adjustable Housing Gasketed to Provide IP65 rating when Paired with Lens

### LENS CONSTRUCTION

Durable UV and Heat Resistant Frosted Polycarbonate

### FINISH

High Quality Dark Bronze Powder Coat Rated for Outdoor Locations

### VOLTAGE

120-277V Input Standard. THD <20% Power Factor >90%

### INSTALLATION

Direct Mounted over standard 4" junction box

### CONTROLS

Photocell is included standard

### CERTIFICATIONS

cULus conforms to UL 1598 and 8750 conforms to CSA 22.2 & DLC Standard Listed.

### OPERATING TEMPERATURE

Wet Location Listed. Suitable for -20C to 45C ambient temperatures

### LUMEN MAINTENANCE


L70 rating of over 63,000 hours

### WARRANTY

Standard 5-Year Warranty

## PHOTOMETRICS

### FOOT CANDLES:

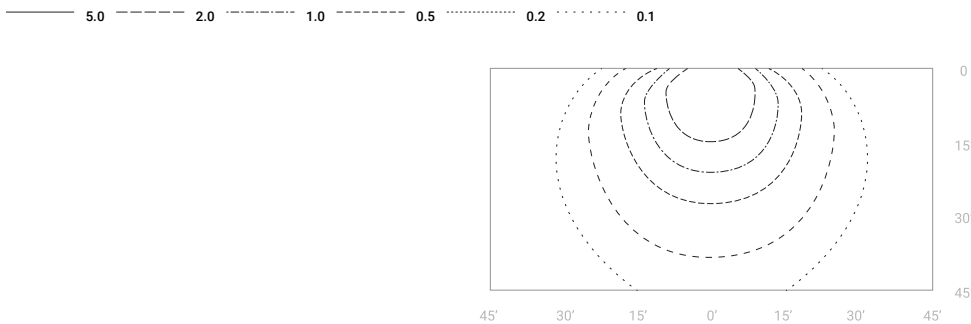

23W-50K  
1,031 LUMENS

FOR ADDITIONAL INFORMATION PLEASE DOWNLOAD IES FILES FROM WEBSITE