

# WP390

LED WALLPACK LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 18 0328



SINGLE BAR VERSION



DOUBLE BAR VERSION

### HEAVY-DUTY, 360° ADJUSTABLE HOUSING

Die Cast Aluminum Housing with Durable, Dark Bronze Powder Coat Finish, and Polycarbonate Lens

### IP-65 RATED WET LOCATION RATED

Engineered and Constructed for Exterior Environments

### DLC PREMIUM

The WP390 Meets the Highest Classification of Efficacy and Lumen Maintenance

### 120-277V STANDARD

### PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # WP390 - 60W - 50K - BZ

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
WP390	25W SINGLE BAR VERSION	40K 4100K - NEUTRAL WHITE	BZ BRONZE (STANDARD)	PC3 120V PENCIL TYPE PHOTOCELL
	40W SINGLE BAR VERSION	50K 5000K - COOL WHITE		
	60W DOUBLE BAR VERSION			
	80W DOUBLE BAR VERSION			


## PRODUCT SPECIFICATIONS

WATTAGE	CCT	DELIVERED LUMENS	EFFICACY	CRI
25W	4000K	3,325 LM	127 LM/W	>70
25W	5000K	3,280 LM	130 LM/W	>70
40W	4000K	5,238 LM	126 LM/W	>70
40W	5000K	5,131 LM	128 LM/W	>70
60W	4000K	7,809 LM	129 LM/W	>70
60W	5000K	7,854 LM	130 LM/W	>70
80W	4000K	10,598 LM	133 LM/W	>70
80W	5000K	10,598 LM	133 LM/W	>70

### 25-40W SINGLE BAR PRODUCT DIMENSIONS

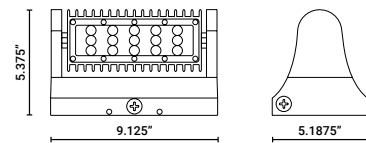

### 60-80W DOUBLE BAR PRODUCT DIMENSIONS

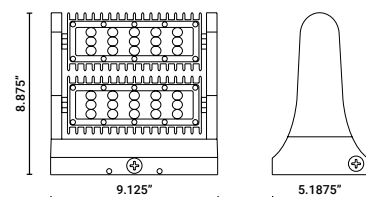

## PRODUCT SPECIFICATIONS (CONT.)

### HOUSING CONSTRUCTION

Heavy Duty Die Cast Aluminum Housing Gasketed to Provide IP65 rating when Paired with Lens

### LENS CONSTRUCTION

Durable UV- and Heat Resistant Polycarbonate

### DIMENSIONS

3 sizes- see diagrams

### FINISH

High Quality Dark Bronze Powder Coat Rated for Outdoor Locations

### VOLTAGE

120-277V Input Standard. THD <20% Power Factor >90%

### OPTICS

Fully adjustable LED module rotates 180 degrees to allows a range of lighting options from full cutoff, forward throw, straight up, or anything in between.

### CERTIFICATIONS

cULus conforms to UL 1598 and 8750 conforms to CSA 22.2 & DLC Premium Listed. Complies with FCC (Part 15, Class B). Complies with EN61000-4-5, surge immunity test (1kV for 25 & 40W, 4kV for the 60& 80W).

### OPERATING TEMPERATURE

Wet Location Listed. Suitable for -30C to 40C ambient temperatures

### LUMEN MAINTENANCE

L70 rating of over 61,000 hours


### WARRANTY

Standard 5-Year Warranty


## PHOTOMETRICS

FOOT CANDLES:


———— 5.0 ———— 2.0 ———— 1.0 ———— 0.5 ———— 0.2 ———— 0.1

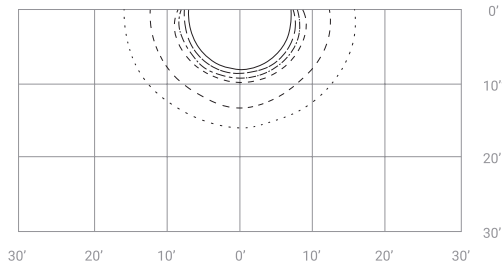


**25W-50K**  
3,280 LUMENS

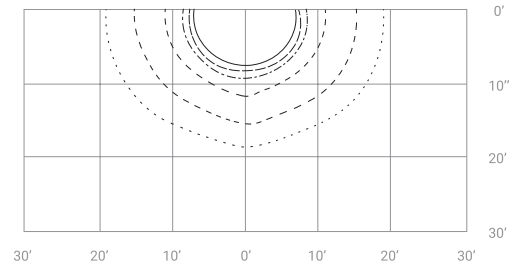

**40W-50K**  
5,131 LUMENS

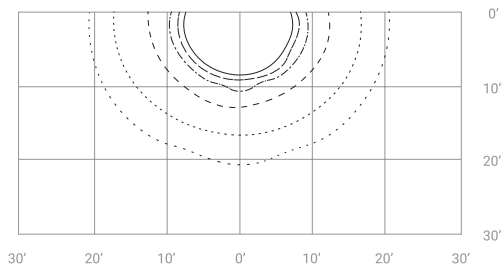

**60W-50K**  
7,854 LUMENS

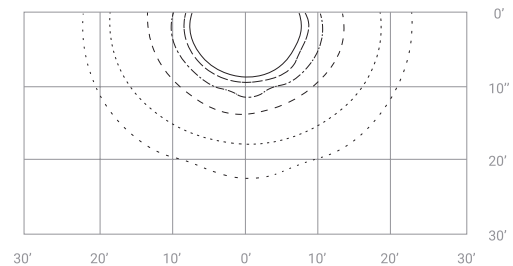

**80W-50K**  
10,598 LUMENS