

CV303

LED CANOPY LUMINAIRE



PROJECT

DATE

TYPE

NOTES

REV: 18 1025



COMPACT, HEAVY-DUTY HOUSING

The CV303 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The CV303 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

120-277V STANDARD TYPE VS DISTRIBUTION

OPERATING TEMPERATURE -20C TO 40C

PRODUCT APPLICATIONS

- Building Canopy
- Parking Garages
- Tunnels
- Storage Facilities
- Gas Stations

When Specifying Options, Please Check with Factory for Availability and Lead-Time.


ORDERING GUIDE Sample Part # CV303 -24W - 30K - BZ - MS

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CV303			BZ	
	24W	30K 3000K - WARM WHITE	BZ BRONZE	MS MOTION SENSOR*
	36W	40K 4000K - NEUTRAL WHITE		D1 0-10V DIMMING
	48W	50K 5000K - COOL WHITE		EM EMERGENCY BATTERY PACK*
	60W			*CONSULT FACTORY FOR ESTIMATED SHIP DATE
	72W*			
		QUANTITY	SHIPS	
		1-5 Pieces (Before 11AM EST)	Same Day	
		5-25 Pieces	3 Days	
		25-100 Pieces	1 Week	

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
24W	23.54	3000K	2,865.00	121.71	PREMIUM
24W	23.54	4000K	2,950.95	125.36	PREMIUM
24W	23.54	5000K	3,039.48	129.12	PREMIUM
36W	34.27	3000K	4,405.69	128.56	PREMIUM
36W	34.27	4000K	4,537.86	132.41	PREMIUM
36W	34.27	5000K	4,674.00	136.39	PREMIUM
48W	46.60	3000K	5,671.58	121.71	PREMIUM
48W	46.60	4000K	5,841.73	125.36	PREMIUM
48W	46.60	5000K	6,016.98	129.12	PREMIUM
60W	56.83	3000K	6,916.65	121.71	PREMIUM
60W	56.83	4000K	7,124.15	125.36	PREMIUM
60W	56.83	5000K	7,337.87	129.12	PREMIUM
72W	67.26	3000K	8,156.00	121.26	PREMIUM
72W	67.26	4000K	8,400.68	124.90	PREMIUM
72W	67.26	5000K	8,652.70	128.65	PREMIUM

PRODUCT DIMENSIONS

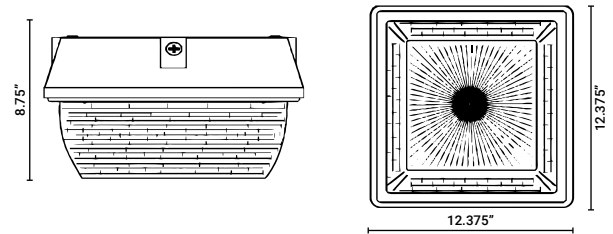

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.