

**DC150**  
LED WALLPACK LUMINAIRE



PROJECT \_\_\_\_\_ DATE \_\_\_\_\_ TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_

REV: 18 1025



**QUICK SHIP**

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

**HEAVY-DUTY HOUSING**

The DC150 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

**WET LOCATION, IP-65 RATED**

Engineered and Constructed for Exterior Environments

**EASY TO INSTALL MOUNTING**

The DC150 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

**120-277V STANDARD TYPE IV DISTRIBUTION**

**OPERATING TEMPERATURE -20C TO 40C**

**PRODUCT APPLICATIONS**

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

**ORDERING GUIDE**


Sample Part # DC150 - 12W - 30K - BZ - PC1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC150			<b>BZ</b>	
	12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
	24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
	36W	50K 5000K - COOL WHITE		MS MOTION SENSOR*
	48W			D1 0-10V DIMMING
	60W			*CONSULT FACTORY FOR ESTIMATED SHIP DATE
	72W*			
		<b>QUANTITY</b>	<b>SHIPS</b>	
		1-5 Pieces (Before 11AM EST)	Same Day	
		5-25 Pieces	3 Days	
		25-100 Pieces	1 Week	

**PRODUCT SPECIFICATIONS**

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.72	3000K	1457.50	114.58	STANDARD
12W	12.72	4000K	1530.38	120.31	STANDARD
12W	12.72	5000K	1606.89	126.33	STANDARD
24W	23.02	3000K	2915.00	126.63	STANDARD
24W	23.02	4000K	3060.75	132.96	STANDARD
24W	23.02	5000K	3213.79	139.61	STANDARD
36W	34.27	3000K	4372.50	127.59	STANDARD
36W	34.27	4000K	4591.12	133.97	STANDARD
36W	34.27	5000K	4820.68	140.67	STANDARD
48W	46.60	3000K	5588.65	119.93	STANDARD
48W	46.60	4000K	5756.31	123.53	STANDARD
48W	46.60	5000K	5929.00	127.23	STANDARD
60W	56.83	3000K	6719.78	118.24	STANDARD
60W	56.83	4000K	7055.77	124.16	STANDARD
60W	56.83	5000K	7408.56	130.36	STANDARD
72W	67.65	3000K	8252.43	121.99	STANDARD
72W	67.65	4000K	8665.05	128.09	STANDARD
72W	67.65	5000K	9098.31	134.49	STANDARD

**PRODUCT DIMENSIONS**

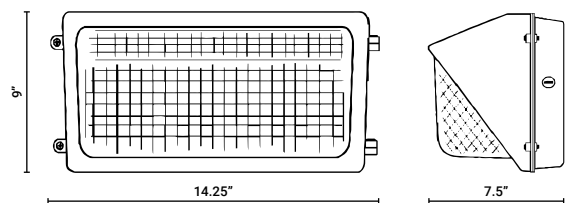

**POWER**

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.