

DC200-90

CUT-OFF LED WALLPACK LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 18 1025



QUICK SHIP

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC200-90 is a Large 18" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC200-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD TYPE VS DISTRIBUTION

PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

ORDERING GUIDE


Sample Part # DC200-90 - 12W - 30K - BZ - PC1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC200-90			BZ	
	12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
	24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
	36W	50K 5000K - COOL WHITE		MS MOTION SENSOR*
	48W			D1 0-10V DIMMING
	60W			EM EMERGENCY BATTERY PACK*
	72W*			*CONSULT FACTORY FOR ESTIMATED SHIP DATE
	84W*			
	96W*			
		QUANTITY	SHIPS	
		1-5 Pieces (Before 11AM EST)	Same Day	
		5-25 Pieces	3 Days	
		25-100 Pieces	1 Week	

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.65	3000K	1,530.00	120.95	PREMIUM
12W	12.65	4000K	1,606.50	127.00	PREMIUM
12W	12.65	5000K	1,686.83	133.35	PREMIUM
24W	23.68	3000K	3,060.00	129.22	PREMIUM
24W	23.68	4000K	3,213.00	135.68	PREMIUM
24W	23.68	5000K	3,373.65	142.47	PREMIUM
36W	34.27	3000K	4,008.38	116.96	PREMIUM
36W	34.27	4000K	4,208.79	122.81	PREMIUM
36W	34.27	5000K	4,419.23	128.95	PREMIUM
48W	45.80	3000K	5,344.50	116.69	PREMIUM
48W	45.80	4000K	5,611.73	122.53	PREMIUM
48W	45.80	5000K	5,892.31	128.65	PREMIUM
60W	56.83	3000K	6,680.63	117.55	PREMIUM
60W	56.83	4000K	7,014.66	123.43	PREMIUM
60W	56.83	5000K	7,365.39	129.60	PREMIUM
72W	67.65	3000K	8,016.75	118.50	STANDARD
72W	67.65	4000K	8,417.59	124.43	STANDARD
72W	67.65	5000K	8,838.47	130.65	STANDARD
84W	80.12	3000K	9,352.88	116.74	STANDARD
84W	80.12	4000K	9,820.52	122.57	STANDARD
84W	80.12	5000K	10,311.54	128.70	STANDARD
96W	91.65	3000K	10,689.00	116.63	STANDARD
96W	91.65	4000K	11,223.45	122.46	STANDARD
96W	91.65	5000K	11,784.62	128.58	STANDARD

PRODUCT DIMENSIONS

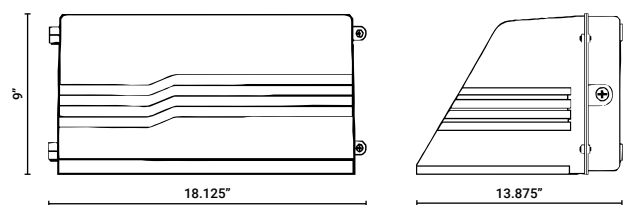

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.