

DC560

LED FLOODLIGHT LUMINAIRE



PROJECT

DATE

TYPE

NOTES

REV: 18 1025



QUICK SHIP

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

COMPACT, HEAVY-DUTY HOUSING

The DC560 is a 12"x 8" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC560 comes standard with an Integral 1/2" Female Threaded Mount

120-277V STANDARD

TYPE III DISTRIBUTION

PRODUCT APPLICATIONS

- Parking Lots
- Walkways
- Buildings
- Signage
- Playgrounds
- Parks & Recreational Fields
- Loading Docks

ORDERING GUIDE

Sample Part # DC560 - 12W - 30K - BZ - PC1


MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC560			BZ	
	12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
	24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
	36W	50K 5000K - COOL WHITE		D1 0-10V DIMMING
	48W			

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.73	3000K	1,487.00	116.81	PREMIUM
12W	12.72	4000K	1,561.35	122.75	PREMIUM
12W	12.72	5000K	1,639.42	128.89	PREMIUM
24W	23.68	3000K	2,974.00	125.59	PREMIUM
24W	23.68	4000K	3,122.70	131.87	PREMIUM
24W	23.68	5000K	3,278.83	138.46	PREMIUM
36W	34.27	3000K	4,461.00	130.17	PREMIUM
36W	34.27	4000K	4,684.05	136.68	PREMIUM
36W	34.27	5000K	4,918.25	143.51	PREMIUM
48W	46.60	3000K	5,948.00	127.64	PREMIUM
48W	46.60	4000K	6,245.40	134.02	PREMIUM
48W	46.60	5000K	6,557.67	140.72	PREMIUM

PRODUCT DIMENSIONS

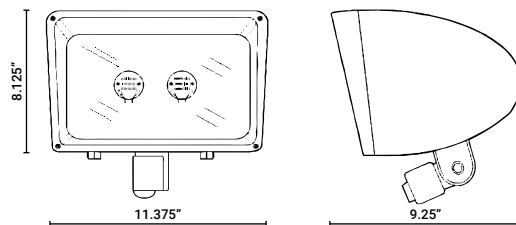

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.