

FLEXLED
DC150-90

MEDIUM 90° CUT-OFF LED WALLPACK



5 YEAR STANDARD WARRANTY | RATED LIFE: 85,000 HOURS+

HOUSING:

Die Cast Aluminum with Bronze Powder Coat and Heat and Impact Resistant Glass

MOUNTING:

Direct over 4" outlet box or surface wired through 1/2" conduit entries.

DRIVER:

Constant Current Class 2 100-277 VAC 50/60Hz
Power Factor: >0.98

CERTIFICATIONS:

Conforms to UL Standards UL-8750 and UL-1598. ETL Listed for USA and Canada. Certified to CSA22.2

ENVIRONMENT:

Outdoor/Wet Location
IP65 Rated

ARRA COMPLIANT:

Buy American Compliant under Section 1605 of the American Re-Investment and Recovery Act.

ORDERING GUIDE


STANDARD CONFIGURATION: DC150-90.28W.40K

MODEL	WATTS	COLOR TEMPERATURE (CCT)	ACCESSORIES
DC150-90*	14W	30K 3000K - Warm White	DIM Accessory - 0-10V Dimmable Driver
	28W*	40K* 4000K - Neutral White	R300755 Accessory - 120V Photocell
	42W	50K 5000K - Cool White	R300756 Accessory - 208V/277V Photocell
		55K 5500K - Daylight	

SPECIFICATIONS

WATTS	DELIVERED LUMENS	EFFICACY	CRI	~HID
14W	1,380lm	110 lm/W	>85	100W
28W	2,660lm	110 lm/W	>85	175W
42W	4,210lm	115 lm/W	>85	250W

DIMENSIONS

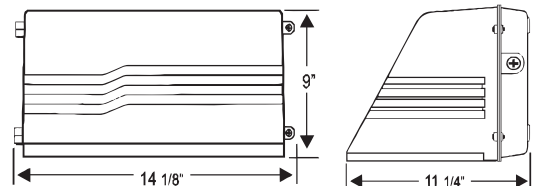

Specifications subject to change without notice. * Indicates DLC Qualified Product