

**FLEXLED**  
**DC560**

MEDIUM ROUND BACK LED FLOOD



5 YEAR STANDARD WARRANTY | RATED LIFE: 85,000 HOURS+

**HOUSING:**

Die Cast Aluminum with Bronze Powder Coat and Heat and Impact Resistant Glass

**CERTIFICATIONS:**

Conforms to UL Standards UL-8750 and UL-1598. ETL Listed for USA and Canada. Certified to CSA22.2

**MOUNTING:**

Integral 1/2" female threaded end.

**ENVIRONMENT:**

Outdoor/Wet Location  
IP66 Rated

**DRIVER:**

Constant Current Class 2 100-277 VAC 50/60Hz  
Power Factor: >0.98

**ARRA COMPLIANT:**

Buy American Compliant under Section 1605 of the American Re-Investment and Recovery Act.

**ORDERING GUIDE**


STANDARD CONFIGURATION: DC560.28W.40K

MODEL	WATTS	COLOR TEMPERATURE (CCT)	ACCESSORIES
DC560*	14W	30K   3000K - Warm White	DIM   Accessory - 0-10V Dimmable Driver
	28W*	40K*   4000K - Neutral White	R300755   Accessory - 120V Photocell
	42W	50K   5000K - Cool White	R300756   Accessory - 208V/277V Photocell
		55K   5500K - Daylight	

**SPECIFICATIONS**

WATTS	DELIVERED LUMENS	EFFICACY	CRI	~HID
14W	1,380lm	110 lm/W	>85	100W
28W	2,660lm	110 lm/W	>85	175W
42W	4,210lm	115 lm/W	>85	250W

**DIMENSIONS**

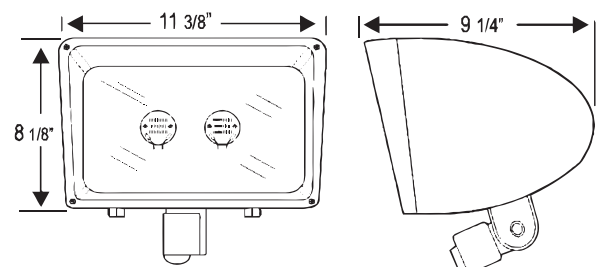

Specifications subject to change without notice. \* Indicates DLC Qualified Product