

ZLED
ZFL
LED FLOODS



5 YEAR STANDARD WARRANTY
RATED LIFE: 50,000 HOURS+



HOUSING:

Die Cast Aluminum with Silver Powder Coat with Heat and Impact Resistant Glass

DRIVER:

Constant Current Class 2 100-277 VAC 50/60Hz
Power Factor: >0.98

MOUNTING:

160° Built-In Swivel Bracket

ENVIRONMENT:

Outdoor/Wet Location. IP66 Rated

CERTIFICATIONS:

UL Listed for USA and Canada.
Conforms to UL-8750 and UL-1598. Certified to CSA22.2




OPTIONAL 36° MEDIUM BEAM OPTICS

ORDERING GUIDE & SPECS


PART NUMBER	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY	COLOR TEMPERATURE	CRI	BEAM ANGLE
ZFL.26W.50K	28W	2,237lm	79 lm/W	5000K - Cool White	>65	Wide Beam
ZFL.26W.50K.36D	28W	2,237lm	79 lm/W	5000K - Cool White	>65	36° Medium Beam
ZFL.52W.50K	57W	4,335lm	75 lm/W	5000K - Cool White	>65	Wide Beam
ZFL.52W.50K.36D	57W	4,335lm	75 lm/W	5000K - Cool White	>65	36° Medium Beam

DIMENSIONS

ZFL.26W

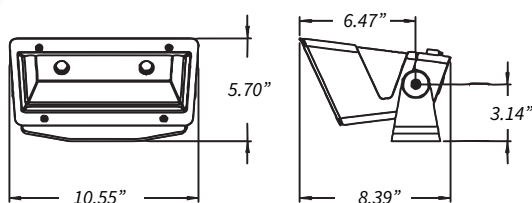

ZFL.52W

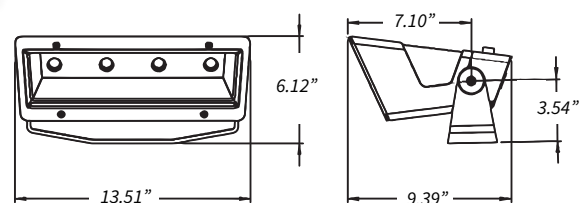

Specifications subject to change without notice. * Indicates DLC Qualified Product