

**ZFLEX
ZHB**

LED HIGH/LOW BAY



5 YEAR STANDARD WARRANTY | RATED LIFE: 50,000 HOURS+



HOUSING:

Die Cast Aluminum with Silver Powder Coat and Clear Acrylic Lens

DRIVER:



Mean Well brand HLG Constant Current 90~305VAC 47~63Hz Driver

MOUNTING:

Wire Mount via Eye-Hook Standard.
Optional 12" or 18" Pendant Mount.

CERTIFICATIONS:



UL Listed for USA and Canada.
Conforms to UL-8750 and UL-1598. Certified to CSA22.2

ENVIRONMENT:


Outdoor/Wet Location. IP66 Rated

ORDERING GUIDE

STANDARD CONFIGURATION: ZHB.150W.41K.80D

MOUNTING DETAIL & DIMENSIONS

Wire Mount via Eye-Hook (Standard)
12" or 18" Pendant Mount (add .PEN12 or .PEN18)

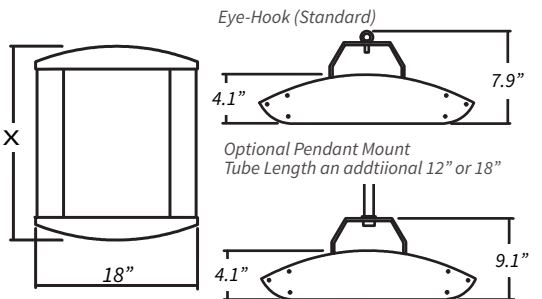

COLOR TEMPERATURE	LUMEN MULTIPLIER	CRI
3000K	0.90	>70
4100K	1.00	>75
6000K	1.11	>70

MODEL	WATTS	COLOR TEMPERATURE (CCT)	OPTICS OPTIONS
ZHB	60W	30K 3000K - Warm White	40D 40° BEAM ANGLE - TYPE V
	100W	35K 3500K - Warm White	80D 80° BEAM ANGLE - TYPE V
	120W	41K 4100K - Neutral White	170D 170° BEAM ANGLE - TYPE V
	150W	50K 5000K - Cool White	T4 TYPE IV
	200W	60K 6000K - Daylight	T3 TYPE III
	250W		T2 TYPE II
			T1 TYPE I

SPECIFICATIONS

SYSTEM WATTS	DELIVERED LUMENS	EFFICACY	MODULES	X" WIDTH
60W	6,900 lm	115 lm/W	2	10.7"
100W	11,780 lm	115 lm/W	3	13.5"
120W	14,130 lm	115 lm/W	4	16.3"
150W	17,240 lm	115 lm/W	5	19.1"
200W	23,220 lm	115 lm/W	6	21.9"
250W	28,800 lm	115 lm/W	7	24.7"

**Specifications based on 4100K color temperature. . May be subject to change without notice. DLC does not apply to 250W or 6000K configurations.