

# DC102

LED WALLPACK LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 01 2021



### COMPACT, HEAVY-DUTY HOUSING

The DC102 is a Small 9" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The DC102 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

### 120-277V STANDARD TYPE IV DISTRIBUTION

### OPERATING TEMPERATURE -20C TO 40C

### PRODUCT APPLICATIONS

- |                    |                    |
|--------------------|--------------------|
| Building Entrances | Bridges            |
| Walkways           | Catwalks           |
| Tunnels            | Stairwells         |
| Loading Docks      | Building Exteriors |

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DC102 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC102				
	12W 12 WATTS	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W 24 WATTS	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W 36 WATTS	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
		40K 4000K - NEUTRAL WHITE	SL SILVER	MS-D2 MOTION SENSOR WITH BILEVEL DIMMING
		50K 5000K - COOL WHITE	CC CUSTOM COLOR	D1 0-10V DIMMING
		57K 5700K - DAYLIGHT		D2 STEP DIMMING (120V ONLY)
				V1* 480/347V INPUT (120-277V STANDARD)
				*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

## PRODUCT SPECIFICATIONS

### PRODUCT DIMENSIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY
12W	12.72	3000K	1,393.50	109.55
12W	12.72	4000K	1,463.18	115.03
12W	12.72	5000K	1,536.33	120.78
24W	23.57	3000K	2,787.00	118.24
24W	23.57	4000K	2,926.35	124.16
24W	23.57	5000K	3,072.67	130.36
36W	34.27	3000K	4,180.50	121.99
36W	34.27	4000K	4,389.53	128.09
36W	34.27	5000K	4,609.00	134.49

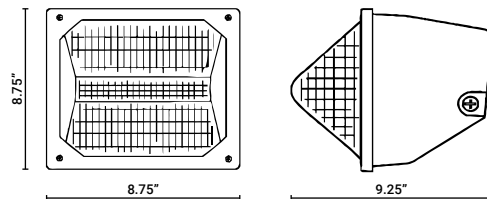

### POWER

POWER FACTOR >0.90 - THD <20