

# DC160-90

CUT-OFF LED WALLPACK LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 01 2021



**FULL CUT-OFF, HEAVY-DUTY HOUSING**

The DC160-90 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

**WET LOCATION, IP-65 RATED**

Engineered and Constructed for Exterior Environments

**EASY TO INSTALL MOUNTING**

The DC160-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

**120-277V STANDARD**

**OPERATING TEMPERATURE -20°C TO 40°C**

**PRODUCT APPLICATIONS**

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

*When Specifying Options, Please Check with Factory for Availability and Lead-Time. Any finish other than Paraflex bronze order is non-cancelable and non-returnable. Any modified product, any selected options added to standard products, deem order non-cancelable and non-returnable. All RMA, Return Material Authorization, must be factory approved.*


**ORDERING GUIDE** Sample Part # DC160-90 - 45W - 40K - T2 - BZ - PC

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTICS	HOUSING COLOR	OPTIONS & ACCESSORIES
<b>DC160-90</b>				<b>BZ</b>	
	40W 40 WATTS	40K 4000K - NEUTRAL WHITE	T2 TYPE II	BZ BRONZE (STANDARD)	PC 120V-277V PHOTOCELL
	60W 60 WATTS	50K 5000K - COOL WHITE	T3 TYPE III T4 TYPE IV		V1* 480/347V INPUT (120-277V STANDARD) *NOT AVAILABLE WITH A PHOTOCELL


**PRODUCT SPECIFICATIONS**

NOMINAL WATTAGE	LUMENS	EFFICACY
40W	4,800	120
60W	7,200	120

OPTICS

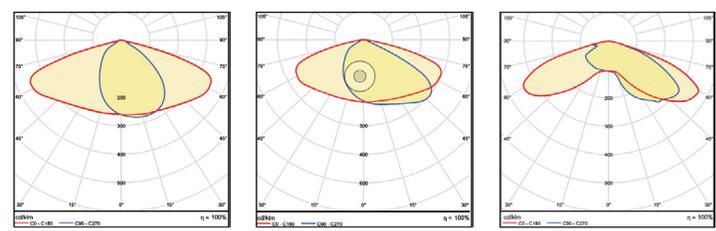

PRODUCT DIMENSIONS

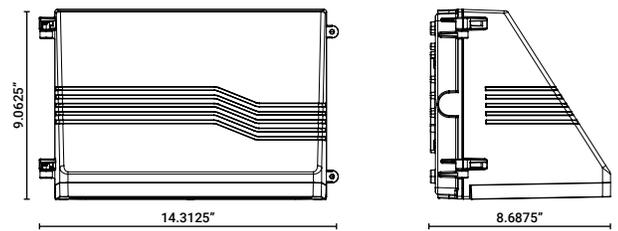

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.