

# PS160

WALL MOUNTED LED LUMINAIRE



PROJECT

DATE

TYPE

NOTES

REV: 18 0515



### INTENDED USE

Provides focused illumination for outdoor use in commercial applications. Ideal for entryways, walkways, play areas, and driveways creating and inviting exterior space as well as providing safety and security. (Wall mount above 4 feet only)

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### ATTRIBUTES

Rugged, weather and rust resistant housing in powder-coated finish. Easily adjustable, capable of providing 20W Up/ 20W Down, 40W Down Only, or 40W Up Only illumination.

### STANDARD

120-277V  
0-10V Dimming to 1%

## ORDERING GUIDE

Sample Part # PS160 - 40W - 40K - GS - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
PS160	40W	40K 4000K - NEUTRAL WHITE	GS GRAY/SILVER (STANDARD)	D1 0-10V DIMMING
		50K 5000K - COOL WHITE	BZ BRONZE	
			SL SILVER	
			WH WHITE	
			BL BLACK	
			CC CUSTOM COLOR	

## PRODUCT SPECIFICATIONS

SYSTEM W	CCT	DELIVERED LUMENS	EFFICACY	CRI
40W (20W+20W ADJUSTABLE)	40K	5160 LM	129 LM/W	>80
40W (20W+20W ADJUSTABLE)	50K	5200 LM	130 LM/W	>80

### FINISH

Exterior-rated powder coat. Available in standard Gray and Silver, Bronze, Silver, White, Black, or in a Custom Color.


### OPERATING TEMPERATURE

-20C to 40C

### WARRANTY

Standard 5-year Warranty.

## PRODUCT DIMENSIONS

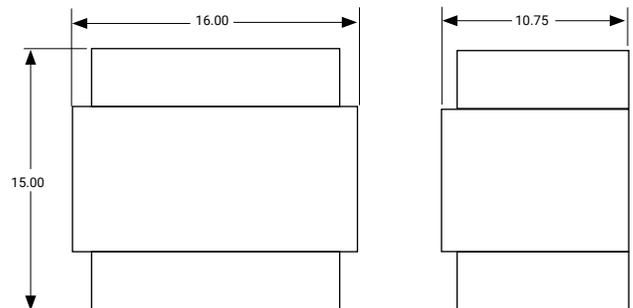

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.