

WP290

LED WALLPACK LUMINAIRE



PROJECT

DATE

TYPE

NOTES

REV: 12 2020



COMPACT, DURABLE HOUSING

The WP290 is a Small Wallpack with a Die Cast Aluminum Housing and Polycarbonate Lens

WET LOCATION, IP-65 RATED

Seamless Gasket Engineered to Prevent Leaks and Provide Installation within Exterior Environments

INTEGRAL PHOTOCELL

The WP290 was Engineered with a Integral Button Photocell

120-277V STANDARD

PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells
- Building Exteriors

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

ORDERING GUIDE


Sample Part # WP290 - 20W - 50K - BZ - PC

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
WP290	20W 20 WATTS	30K 3000K WARM WHITE* 50K 5000K COOL WHITE *NOT DLC LISTED	BZ BRONZE (STANDARD)	PC 120V-277V BUTTON TYPE PHOTOCELL

PRODUCT SPECIFICATIONS

WATTAGE	CCT	DELIVERED LUMENS	EFFICACY	CRI
20W	3000K	2,381 LM	121 LM/W	>80
20W	5000K	2,472 LM	126 LM/W	>80

PRODUCT DIMENSIONS

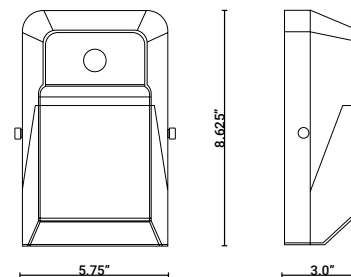

DLC LISTINGS

WP290 - 20W - 50K - BZ - PC

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

WP290

LED WALLPACK LUMINAIRE

PARAFLEX
Fast Flexible Focused Lighting

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PRODUCT SPECIFICATIONS (CONT.)

HOUSING CONSTRUCTION

Heavy Duty Die Cast Aluminum Adjustable Housing Gasketed to Provide IP65 rating when Paired with Lens

LENS CONSTRUCTION

Durable UV and Heat Resistant Frosted Polycarbonate

FINISH

High Quality Dark Bronze Powder Coat Rated for Outdoor Locations

VOLTAGE

120-277V Input Standard. THD <20% Power Factor >90%

INSTALLATION

Direct Mounted over standard 4" junction box

CONTROLS

Photocell is included standard

CERTIFICATIONS

cULus conforms to UL 1598 and 8750 conforms to CSA 22.2 & DLC Standard Listed.

OPERATING TEMPERATURE

Wet Location Listed. Suitable for -20C to 45C ambient temperatures

LUMEN MAINTENANCE


L70 rating of over 63,000 hours

WARRANTY

Standard 5-Year Warranty

PHOTOMETRICS

FOOT CANDLES:

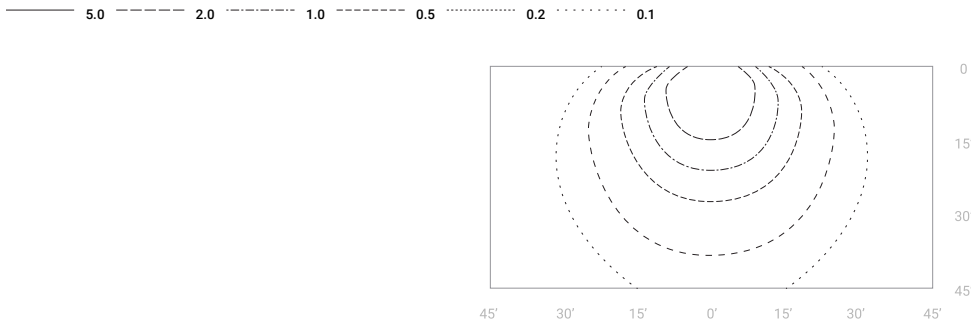

23W-50K
1,031 LUMENS