

WP390

LED WALLPACK LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 01 2021



HEAVY-DUTY, 360° ADJUSTABLE HOUSING

Die Cast Aluminum Housing with Durable, Dark Bronze Powder Coat Finish, and Polycarbonate Lens

IP-65 RATED WET LOCATION RATED

Engineered and Constructed for Exterior Environments

DLC PREMIUM

The WP390 Meets the Highest Classification of Efficacy and Lumen Maintenance

120-277V STANDARD

PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

ORDERING GUIDE


Sample Part # WP390 - 60W - 50K - BZ

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR
WP390			BZ
	25W SINGLE BAR VERSION	40K 4000K - NEUTRAL WHITE	BZ BRONZE (STANDARD)
	40W SINGLE BAR VERSION	50K 5000K - COOL WHITE	
	60W DOUBLE BAR VERSION		
	80W DOUBLE BAR VERSION		


PRODUCT SPECIFICATIONS

WATTAGE	CCT	DELIVERED LUMENS	EFFICACY	CRI
25W	4000K	3,325 LM	127 LM/W	>70
25W	5000K	3,280 LM	130 LM/W	>70
40W	4000K	5,238 LM	126 LM/W	>70
40W	5000K	5,131 LM	128 LM/W	>70
60W	4000K	7,809 LM	129 LM/W	>70
60W	5000K	7,854 LM	130 LM/W	>70
80W	4000K	10,598 LM	133 LM/W	>70
80W	5000K	10,598 LM	133 LM/W	>70

25-40W SINGLE BAR PRODUCT DIMENSIONS

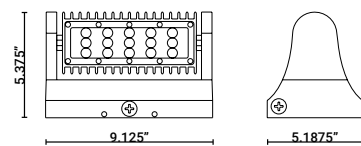

60-80W DOUBLE BAR PRODUCT DIMENSIONS

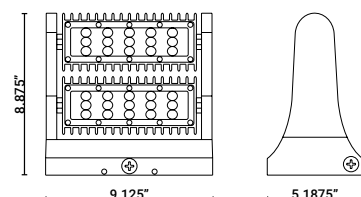

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

WP390

LED WALLPACK LUMINAIRE

PARAFLEX
Fast Flexible Focused Lighting

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PRODUCT SPECIFICATIONS (CONT.)

HOUSING CONSTRUCTION

Heavy Duty Die Cast Aluminum Housing Gasketed to Provide IP65 rating when Paired with Lens

LENS CONSTRUCTION

Durable UV- and Heat Resistant Polycarbonate

DIMENSIONS

2 sizes- see diagrams

FINISH

High Quality Dark Bronze Powder Coat Rated for Outdoor Locations

VOLTAGE

120-277V Input Standard. THD <20% Power Factor >90%

ADJUSTABLE LED MODULES

Fully adjustable LED module rotates 180 degrees to allows a range of lighting options from full cutoff, forward throw, straight up, or anything in between.

CERTIFICATIONS

cULus conforms to UL 1598 and 8750 conforms to CSA 22.2 & DLC Premium Listed. Complies with FCC (Part 15, Class B). Complies with EN61000-4-5, surge immunity test (1kV for 25 & 40W, 4kV for the 60& 80W).

OPERATING TEMPERATURE

Wet Location Listed. Suitable for -20C to 45C ambient temperatures

LUMEN MAINTENANCE

L70 rating of over 61,000 hours


WARRANTY

Standard 5-Year Warranty


PHOTOMETRICS

FOOT CANDLES:


5.0 2.0 1.0 0.5 0.2 0.1

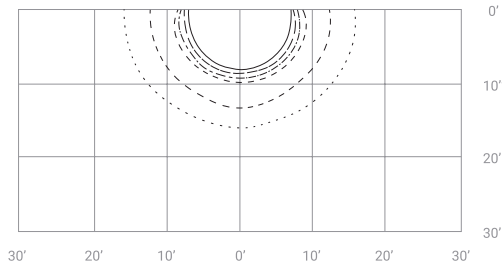


25W-50K
3,280 LUMENS

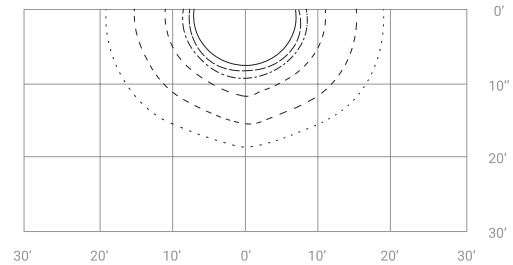

40W-50K
5,131 LUMENS

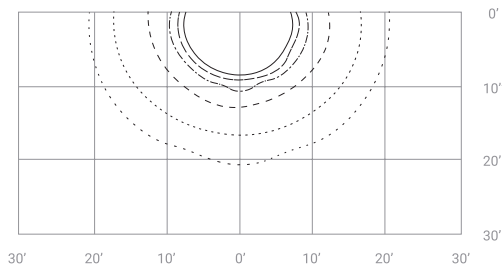

60W-50K
7,854 LUMENS

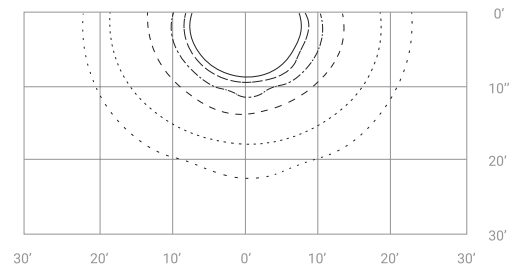

80W-50K
10,598 LUMENS