

# CV203

LED CANOPY LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 12 2020



**COMPACT, HEAVY-DUTY HOUSING**

The CV203 is a 9" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

**WET LOCATION, IP-65 RATED**

Engineered and Constructed for Exterior Environments

**EASY TO INSTALL MOUNTING**

The CV203 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

**120-277V STANDARD TYPE VS DISTRIBUTION**

**OPERATING TEMPERATURE -20C TO 40C**

**PRODUCT APPLICATIONS**

- Building Canopy
- Storage Facilities
- Parking Garages
- Gas Stations
- Tunnels

*When Specifying Options, Please Check with Factory for Availability and Lead-Time.*

**ORDERING GUIDE**

Sample Part # CV203 - 12W - 30K - BZ - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CV203			<b>BZ</b>	
	12W 12 WATTS	30K 3000K - WARM WHITE	BZ BRONZE (STANDARD)	D1 0-10V DIMMING
	24W 24 WATTS	40K 4000K - NEUTRAL WHITE		
	36W 36 WATTS	50K 5000K - DAYLIGHT		


  

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

**PRODUCT SPECIFICATIONS**

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMEN	EFFICACY
12W	12.65	3000K	1432.50	113.24
12W	12.65	4000K	1475.48	116.64
12W	12.65	5000K	1519.74	120.14
24W	23.54	3000K	2865.00	121.71
24W	23.54	4000K	2950.95	125.36
24W	23.54	5000K	3039.48	129.12
36W	34.27	3000K	4405.69	128.56
36W	34.27	4000K	4537.86	132.41
36W	34.27	5000K	4674.00	136.39

**PRODUCT DIMENSIONS**

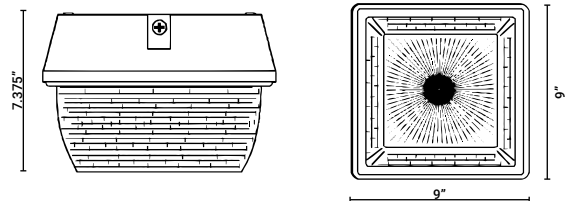

**POWER**

POWER FACTOR >0.90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.