

# DC200-90

CUT-OFF LED WALLPACK LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 12 2020



### FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC200-90 is a Large 18" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The DC200-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

### 120-277V STANDARD TYPE VS DISTRIBUTION

### OPERATING TEMPERATURE -20C TO 40C

### PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DC200-90 - 12W - 30K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC200-90			<b>BZ</b>	
	12W 12 WATTS	30K 3000K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W 24 WATTS	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
	36W 36 WATTS	50K 5000K - DAYLIGHT		MS MOTION SENSOR*
	48W 48 WATTS			D1 0-10V DIMMING
	60W 60 WATTS			*CONSULT FACTORY FOR ESTIMATED SHIP DATE
	72W 72 WATTS*			
	84W 84 WATTS*			
	96W 96 WATTS*			

## PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY
12W	12.65	3000K	1,530.00	120.95
12W	12.65	4000K	1,606.50	127.00
12W	12.65	5000K	1,686.83	133.35
24W	23.68	3000K	3,060.00	129.22
24W	23.68	4000K	3,213.00	135.68
24W	23.68	5000K	3,373.65	142.47
36W	34.27	3000K	4,008.38	116.96
36W	34.27	4000K	4,208.79	122.81
36W	34.27	5000K	4,419.23	128.95
48W	45.80	3000K	5,344.50	116.69
48W	45.80	4000K	5,611.73	122.53
48W	45.80	5000K	5,892.31	128.65
60W	56.83	3000K	6,680.63	117.55
60W	56.83	4000K	7,014.66	123.43
60W	56.83	5000K	7,365.39	129.60
72W	67.65	3000K	8,016.75	118.50
72W	67.65	4000K	8,417.59	124.43
72W	67.65	5000K	8,838.47	130.65
84W	80.12	3000K	9,352.88	116.74
84W	80.12	4000K	9,820.52	122.57
84W	80.12	5000K	10,311.54	128.70
96W	91.65	3000K	10,689.00	116.63
96W	91.65	4000K	11,223.45	122.46
96W	91.65	5000K	11,784.62	128.58

### PRODUCT DIMENSIONS

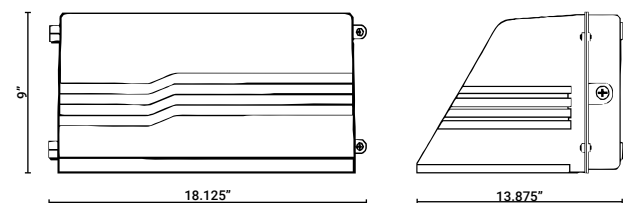

### POWER

POWER FACTOR >0.90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.