

DC200

LED WALLPACK LUMINAIRE

PROJECT

DATE

TYPE

NOTES



REV: 12 2020



LARGE, HEAVY-DUTY HOUSING

The DC200 is a Large 18" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC200 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD TYPE IV DISTRIBUTION

OPERATING TEMPERATURE -20C TO 40C

0C - 40C with EM Pack Option

PRODUCT APPLICATIONS

- Building Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

ORDERING GUIDE

Sample Part # DC200 - 12W - 30K - BZ - PC1 - D1


MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC200			BZ	
	12W 12 WATTS	30K 3000K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W 24 WATTS	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
	36W 36 WATTS	50K 5000K - DAYLIGHT		MS MOTION SENSOR*
	48W 48 WATTS			D1 0-10V DIMMING
	60W 60 WATTS			*CONSULT FACTORY FOR ESTIMATED SHIP DATE
	72W 72 WATTS*			
	84W 84 WATTS*			
	96W 96 WATTS*			

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.72	3000K	1,480.50	116.39	STANDARD
12W	12.72	4000K	1,554.53	122.21	STANDARD
12W	12.72	5000K	1,632.25	128.32	STANDARD
24W	23.68	3000K	2,961.00	125.04	STANDARD
24W	23.68	4000K	3,109.05	131.29	STANDARD
24W	23.68	5000K	3,264.50	137.86	STANDARD
36W	34.27	3000K	4,441.50	129.60	STANDARD
36W	34.27	4000K	4,663.58	136.08	STANDARD
36W	34.27	5000K	4,896.75	142.89	STANDARD
48W	46.60	3000K	5,922.00	127.08	STANDARD
48W	46.60	4000K	6,218.10	133.44	STANDARD
48W	46.60	5000K	6,529.01	140.11	STANDARD
60W	56.83	3000K	7,402.50	130.26	STANDARD
60W	56.83	4000K	7,772.63	136.77	STANDARD
60W	56.83	5000K	8,161.26	143.61	STANDARD
72W	67.65	3000K	8,883.00	131.31	STANDARD
72W	67.65	4000K	9,327.15	137.87	STANDARD
72W	67.65	5000K	9,793.51	144.77	STANDARD
84W	81.55	3000K	10,363.50	127.08	NONE
84W	81.55	4000K	10,881.68	133.44	NONE
84W	81.55	5000K	11,425.76	140.11	NONE
96W	91.65	3000K	11,844.00	129.23	NONE
96W	91.65	4000K	12,436.20	135.69	NONE
96W	91.65	5000K	13,058.01	142.48	NONE

PRODUCT DIMENSIONS

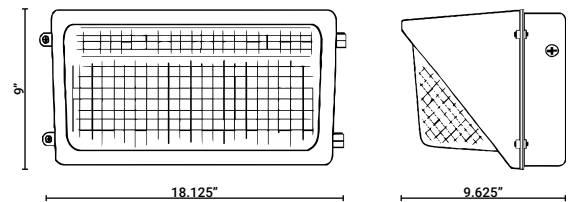

POWER

POWER FACTOR >0.90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.