

**DC400**  
LED FLOODLIGHT LUMINAIRE

PROJECT  
NOTES

DATE

TYPE



REV: 12 2020



**COMPACT, HEAVY-DUTY HOUSING**

The DC400 is a 16"x 10" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

**WET LOCATION, IP-65 RATED**

Engineered and Constructed for Exterior Environments

**VERSATILE MOUNTING OPTIONS**

The DC400 is available with Three Mounting Options: Trunnion, Slip-Fitter and Straight Arm

**120-277V STANDARD TYPE VS DISTRIBUTION**

**OPERATING TEMPERATURE -20C TO 40C**

0C - 40C with EM Pack Option

**PRODUCT APPLICATIONS**

- Parking Lots
- Walkways
- Buildings
- Signage
- Playgrounds
- Parks & Recreational Fields
- Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

**ORDERING GUIDE**


Sample Part # DC400 - 12W - 30K - BZ - SF - MS - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	MOUNTING	OPTIONS & ACCESSORIES
DC400			BZ		
	12W 12 WATTS	30K 3000K - WARM WHITE	BZ BRONZE (STANDARD)	NA NONE (BY OTHERS)	MS MOTION SENSOR*
	24W 24 WATTS	40K 4000K - NEUTRAL WHITE		TR TRUNNION MOUNT	D1 0-10V DIMMING
	36W 36 WATTS	50K 5000K - DAYLIGHT		SF SLIP-FITTER	EM EMERGENCY BATTERY PACK*
	48W 48 WATTS			ST STRAIGHT ARM	*CONSULT FACTORY FOR ESTIMATED SHIP DATE
	60W 60 WATTS				
	72W 72 WATTS*				
	84W 84 WATTS*				
	96W 96 WATTS*				
				<b>QUANTITY</b>	<b>SHIPS</b>
				1-5 Pieces (Before 11AM EST)	Same Day
				5-25 Pieces	3 Days
				25-100 Pieces	1 Week

**PRODUCT SPECIFICATIONS**

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.40	3000K	1,333.00	107.59	PREMIUM
12W	12.72	4000K	1,399.65	110.04	PREMIUM
12W	12.72	5000K	1,469.63	115.54	PREMIUM
24W	23.68	3000K	2,636.25	111.33	PREMIUM
24W	23.68	4000K	2,768.06	116.89	PREMIUM
24W	23.68	5000K	2,906.47	122.74	PREMIUM
36W	34.27	3000K	3,954.38	115.39	PREMIUM
36W	34.27	4000K	4,152.09	121.16	PREMIUM
36W	34.27	5000K	4,359.70	127.22	PREMIUM
48W	46.60	3000K	5,633.00	120.88	PREMIUM
48W	46.60	4000K	5,914.65	126.92	PREMIUM
48W	46.60	5000K	6,210.38	133.27	PREMIUM
60W	56.83	3000K	6,823.00	120.06	PREMIUM
60W	56.83	4000K	7,164.15	126.06	PREMIUM
60W	56.83	5000K	7,522.36	132.37	PREMIUM
72W	67.65	3000K	8,122.05	120.06	PREMIUM
72W	67.65	4000K	8,528.15	126.06	STANDARD
72W	67.65	5000K	8,954.56	132.37	STANDARD
84W	80.26	3000K	9,636.00	120.06	STANDARD
84W	81.55	4000K	10,117.80	124.07	STANDARD
84W	81.55	5000K	10,623.70	130.27	STANDARD
96W	92.50	3000K	10,545.00	114.00	STANDARD
96W	91.65	4000K	11,310.00	123.40	STANDARD
96W	91.65	5000K	11,625.90	126.85	STANDARD

**PRODUCT DIMENSIONS**

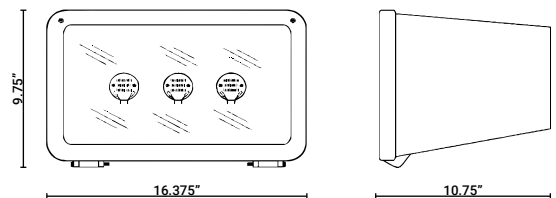

**POWER**

POWER FACTOR >0.90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.