

DC570
LED FLOODLIGHT LUMINAIRE

PROJECT
NOTES

DATE

TYPE



REV: 12 2020



COMPACT, HEAVY-DUTY HOUSING

The DC570 is a 16" Square Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

VERSATILE MOUNTING OPTIONS

The DC570 is available with Three Mounting Options: Trunnion, Slip-Fitter and Straight Arm

120-277V STANDARD TYPE V DISTRIBUTION

OPERATING TEMPERATURE -20C TO 40C

0C - 40C with EM Pack Option

PRODUCT APPLICATIONS

- Parking Lots
- Walkways
- Buildings
- Signage
- Playgrounds
- Parks & Recreational Fields
- Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

ORDERING GUIDE


Sample Part # DC570 - 12W - 30K - BZ - TR - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	MOUNTING	OPTIONS & ACCESSORIES
DC570			BZ		
	12W 12 WATTS	30K 3000K - WARM WHITE	BZ BRONZE (STANDARD)	NA NONE (BY OTHERS)	PC1 120V PHOTOCELL
	24W 24 WATTS	40K 4000K - NEUTRAL WHITE		TR TRUNNION MOUNT	PC2 208/277V PHOTOCELL
	36W 36 WATTS	50K 5000K - DAYLIGHT		SF SLIP-FITTER	MS MOTION SENSOR*
	48W 48 WATTS			ST STRAIGHT ARM	D1 0-10V DIMMING
	60W 60 WATTS				EM EMERGENCY BATTERY PACK*
	72W 72 WATTS*				*CONSULT FACTORY FOR ESTIMATED SHIP DATE
	84W 84 WATTS*				
	96W 96 WATTS*				
				QUANTITY	SHIPS
				1-5 Pieces (Before 11AM EST)	Same Day
				5-25 Pieces	3 Days
				25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.72	3000K	1,391.25	109.38	PREMIUM
12W	12.72	4000K	1,460.81	114.84	PREMIUM
12W	12.72	5000K	1,533.85	120.59	PREMIUM
24W	23.68	3000K	2,782.50	117.50	PREMIUM
24W	23.68	4000K	2,921.62	123.38	PREMIUM
24W	23.68	5000K	3,067.71	129.55	PREMIUM
36W	34.27	3000K	4,173.75	121.79	PREMIUM
36W	34.27	4000K	4,382.44	127.88	PREMIUM
36W	34.27	5000K	4,601.56	134.27	PREMIUM
48W	46.60	3000K	5,633.00	120.88	PREMIUM
48W	46.60	4000K	5,914.65	126.92	PREMIUM
48W	46.60	5000K	6,210.38	133.27	PREMIUM
60W	56.83	3000K	6,956.25	122.40	STANDARD
60W	56.83	4000K	7,304.06	128.52	STANDARD
60W	56.83	5000K	7,669.27	134.95	STANDARD
72W	67.65	3000K	8,347.50	123.39	STANDARD
72W	67.65	4000K	8,764.88	129.56	STANDARD
72W	67.65	5000K	9,203.12	136.04	STANDARD
84W	81.55	3000K	9,738.75	119.42	STANDARD
84W	81.55	4000K	10,225.70	125.39	STANDARD
84W	81.55	5000K	10,737.00	131.66	STANDARD
96W	91.40	3000K	11,130.00	121.77	STANDARD
96W	91.65	4000K	11,686.50	127.51	STANDARD
96W	91.65	5000K	12,270.80	133.89	STANDARD

PRODUCT DIMENSIONS

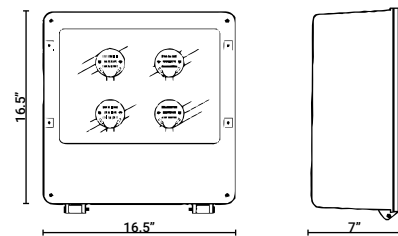

POWER

POWER FACTOR >0.90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.