



**PARAFLEX**  
*Fast Flexible Focused Lighting*

**2018**  
*Catalog*



***FAST  
FLEXIBLE  
FOCUSED***



## Table Of **Contents**

|           |                            |
|-----------|----------------------------|
| <b>4</b>  | About Us                   |
| <b>8</b>  | ZFLEX Catalog              |
| <b>18</b> | Exterior Catalog           |
| <b>20</b> | <i>Wallpack</i>            |
| <b>34</b> | <i>Canopy &amp; Garage</i> |
| <b>42</b> | <i>Floodlight</i>          |
| <b>54</b> | <i>Area &amp; Post Top</i> |
| <b>58</b> | QuickShip Catalog          |

## // The Paraflex **Way**


For over **50 years**, Paraflex Industries has manufactured high quality products for the Lighting Industry. Paraflex prides itself on providing customers with access to the latest advancements in lighting technology while not compromising its core values.





## **Fast Solutions**

From Quotes to Orders to Shipping  
PARAFLEX has developed the internal  
processes to quickly serve your  
project needs.



## **Flexible Products**

PARAFLEX offers customers with  
configurable lighting products built  
to serve a wide variety of project  
applications.



## **Focused on Service**


Our team of experts is ready to serve  
our customers in a very timely and  
efficient manner. Reach out today and  
experience The PARAFLEX Way!

# // EXTERIOR


## ZFLEX



## WALLPACK

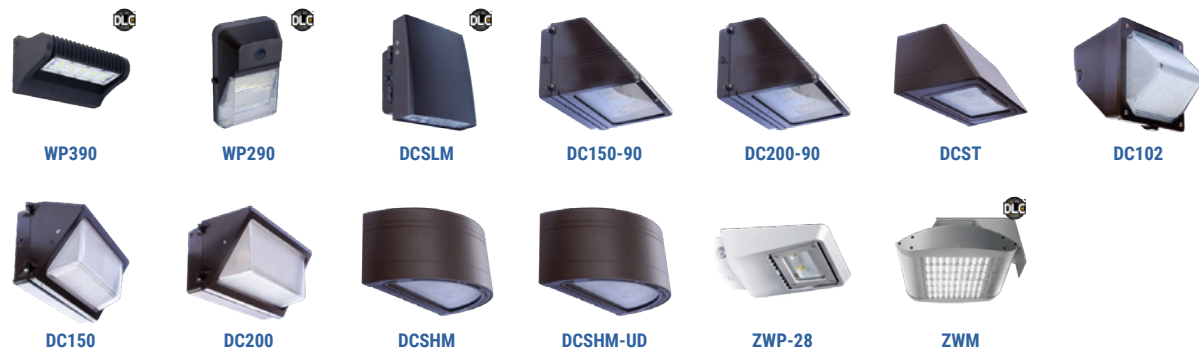

## CANOPY & GARAGE

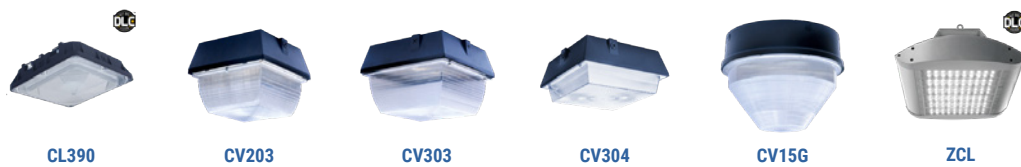

## FLOODLIGHTS



## AREA & POST TOP



## WALLPACK

---




DC102-QS




DC150-QS



DC200-QS



DC150-90-QS



DC200-90-QS



DCSHM-QS



DCSHM-UD-QS



DCST-QS

## CANOPY & GARAGE

---



CV203-QS



CV303-QS



CV304-QS



CV15G-QS

## FLOODLIGHTS

---



DC531-QS



DC545-QS



DC560-QS



DC400-QS



DC570-QS





# ZFLEX SERIES

ONE HOUSING, SIX MOUNTING OPTIONS  
& THOUSANDS OF POSSIBILITIES

Wall Mount

Floodlight

Canopy

Post Top

Post Top w/Arm

High Bay

**PARAFLEX**



**ZSL**

**ZCL**

ZWM



## // Citrus Bowl Stadium

Recently, **The Citrus Bowl** (now Camping World Stadium) underwent a major reconstruction project designed to modernize the facility and allow it to continue drawing high-profile events. One of key design features of the project was to create a **vibrant, open-air facade** to help increase the fan experience as well as modernize the exterior facade.

Paraflex's **ZFLEX LED Luminaire** was chosen as the premier light to illuminate this complex project. **The ZFLEX LED Luminaire** offered the design team with a wide variety of mounting options and lumen packages which together provided the stadium with a cohesive architectural style.

## // FEATURED PRODUCTS



**ZSL**  
Post Top



**ZCL**  
Canopy



**ZWM**  
Wall Mount

## ZWM

FLEXIBLE LED WALL MOUNT LUMINAIRE



### HEAVY-DUTY, IP-66 RATED HOUSING

The ZWM is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

### FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZWM to meet a wide-range of project requirements

### EASY TO INSTALL MOUNTING HARDWARE

The ZWM comes standard with a Wall Mount Bracket engineered to be installed within a variety of Exterior Applications

### 120-277V STANDARD

### PRODUCT APPLICATIONS

Parking Lots                      Bridges  
Walkways                          Catwalks  
Tunnels  
Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE

Sample Part # ZWM - 100W - 40K - BZ - PC1 - D1


| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | OPTICS                        | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|-------------------------------|----------------------|--------------------------------------------------|
| ZWM   |         |                           |                               |                      |                                                  |
|       | 60W     | 30K 3000K - WARM WHITE    | T1 TYPE I                     | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 100W    | 40K 4000K - NEUTRAL WHITE | T2 TYPE II                    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 120W    | 50K 5000K - COOL WHITE    | T3 TYPE III                   | BL BLACK             | MS MOTION SENSOR                                 |
|       | 150W    | 57K 5700K - DAYLIGHT      | T4 TYPE IV                    | SL SILVER            | D1 0-10V DIMMING                                 |
|       | 200W    |                           | 20D TYPE V - 20° BEAM ANGLE   |                      | D2 STEP DIMMING                                  |
|       | 250W    |                           | 40D TYPE V - 40° BEAM ANGLE   |                      | NC1 NETWORK CONTROLS FOR ZIGBEE                  |
|       | 300W    |                           | 80D TYPE V - 80° BEAM ANGLE   |                      | HS HOUSE-SIDE SHIELD                             |
|       |         |                           | 170D TYPE V - 170° BEAM ANGLE |                      | WG PROTECTIVE WIRE GUARD                         |
|       |         |                           |                               |                      | EM EMERGENCY DRIVER                              |
|       |         |                           |                               |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       |         |                           |                               |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| WATTAGE | DELIVERED LUMENS | EFFICACY | MODULES | X: WIDTH |
|---------|------------------|----------|---------|----------|
| 60W     | 7,380 LM         | 123 LM/W | 2       | 10.7"    |
| 100W    | 12,300 LM        | 123 LM/W | 3       | 13.5"    |
| 120W    | 14,760 LM        | 123 LM/W | 4       | 16.3"    |
| 150W    | 28,450 LM        | 123 LM/W | 5       | 19.1"    |
| 200W    | 24,600 LM        | 123 LM/W | 6       | 21.9"    |
| 250W    | 30,750 LM        | 123 LM/W | 7       | 24.7"    |
| 300W    | 36,900 LM        | 123 LM/W | 8       | 27.5"    |

Notes  
Specifications Determined at 5000K and 80° Beam Angle

## PRODUCT DIMENSIONS



## ZCL

FLEXIBLE LED CANOPY & GARAGE LUMINAIRE



### HEAVY-DUTY, IP-66 RATED HOUSING

The ZCL is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

### FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZCL to meet a wide-range of project requirements

### EASY TO INSTALL MOUNTING HARDWARE

The ZCL comes standard with a Removable Bracket engineered to be installed within a variety of Surface Mounting Applications

### 120-277V STANDARD

### PRODUCT APPLICATIONS

|                 |                    |
|-----------------|--------------------|
| Building Canopy | Gas Stations       |
| Parking Garages | Catwalks           |
| Tunnels         | Storage Facilities |
| Bridges         | Concourses         |

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

### ORDERING GUIDE

Sample Part # ZCL - 100W - 40K - BZ - PC1 - D1


| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | OPTICS                        | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|-------------------------------|----------------------|--------------------------------------------------|
| ZCL   |         |                           |                               |                      |                                                  |
|       | 60W     | 30K 3000K - WARM WHITE    | T1 TYPE I                     | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 100W    | 40K 4000K - NEUTRAL WHITE | T2 TYPE II                    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 120W    | 50K 5000K - COOL WHITE    | T3 TYPE III                   | BL BLACK             | MS MOTION SENSOR                                 |
|       | 150W    | 57K 5700K - DAYLIGHT      | T4 TYPE IV                    | SL SILVER            | D1 0-10V DIMMING                                 |
|       | 200W    |                           | 20D TYPE V - 20° BEAM ANGLE   |                      | D2 STEP DIMMING                                  |
|       | 250W    |                           | 40D TYPE V - 40° BEAM ANGLE   |                      | NC1 NETWORK CONTROLS FOR ZIGBEE                  |
|       | 300W    |                           | 80D TYPE V - 80° BEAM ANGLE   |                      | HS HOUSE-SIDE SHIELD                             |
|       |         |                           | 170D TYPE V - 170° BEAM ANGLE |                      | WG PROTECTIVE WIRE GUARD                         |
|       |         |                           |                               |                      | EM EMERGENCY DRIVER                              |
|       |         |                           |                               |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       |         |                           |                               |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

### PRODUCT SPECIFICATIONS

| WATTAGE | DELIVERED LUMENS | EFFICACY | MODULES | X: WIDTH |
|---------|------------------|----------|---------|----------|
| 60W     | 7,380 LM         | 123 LM/W | 2       | 10.7"    |
| 100W    | 12,300 LM        | 123 LM/W | 3       | 13.5"    |
| 120W    | 14,760 LM        | 123 LM/W | 4       | 16.3"    |
| 150W    | 28,450 LM        | 123 LM/W | 5       | 19.1"    |
| 200W    | 24,600 LM        | 123 LM/W | 6       | 21.9"    |
| 250W    | 30,750 LM        | 123 LM/W | 7       | 24.7"    |
| 300W    | 36,900 LM        | 123 LM/W | 8       | 27.5"    |

Notes  
Specifications Determined at 5000K and 80° Beam Angle

### PRODUCT DIMENSIONS



## ZFL

FLEXIBLE LED FLOODLIGHT LUMINAIRE

**HEAVY-DUTY, IP-66 RATED HOUSING**

The ZFL is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

**FLEXIBLE LIGHT OUTPUT CONFIGURATIONS**

Extensive offering of Wattage, Optics and CCT options allow the ZFL to meet a wide-range of project requirements

**EASY TO INSTALL MOUNTING HARDWARE**

The ZFL comes standard with a Yoke Mount Bracket engineered to be installed within a variety of Area & Flood Applications

**120-277V STANDARD****PRODUCT APPLICATIONS**

|              |                             |
|--------------|-----------------------------|
| Parking Lots | Playgrounds                 |
| Walkways     | Parks & Recreational Fields |
| Buildings    | Loading Docks               |
| Signage      | Flagpoles                   |

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

**ORDERING GUIDE**


Sample Part # ZFL - 100W - 40K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | OPTICS                        | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|-------------------------------|----------------------|--------------------------------------------------|
| ZFL   |         |                           |                               |                      |                                                  |
|       | 60W     | 30K 3000K - WARM WHITE    | T1 TYPE I                     | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 100W    | 40K 4000K - NEUTRAL WHITE | T2 TYPE II                    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 120W    | 50K 5000K - COOL WHITE    | T3 TYPE III                   | BL BLACK             | MS MOTION SENSOR                                 |
|       | 150W    | 57K 5700K - DAYLIGHT      | T4 TYPE IV                    | SL SILVER            | D1 0-10V DIMMING                                 |
|       | 200W    |                           | 20D TYPE V - 20° BEAM ANGLE   |                      | D2 STEP DIMMING                                  |
|       | 250W    |                           | 40D TYPE V - 40° BEAM ANGLE   |                      | NC1 NETWORK CONTROLS FOR ZIGBEE                  |
|       | 300W    |                           | 80D TYPE V - 80° BEAM ANGLE   |                      | HS HOUSE-SIDE SHIELD                             |
|       |         |                           | 170D TYPE V - 170° BEAM ANGLE |                      | WG PROTECTIVE WIRE GUARD                         |
|       |         |                           |                               |                      | EM EMERGENCY DRIVER                              |
|       |         |                           |                               |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       |         |                           |                               |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

**PRODUCT SPECIFICATIONS**

| WATTAGE | DELIVERED LUMENS | EFFICACY | MODULES | X: WIDTH |
|---------|------------------|----------|---------|----------|
| 60W     | 7,380 LM         | 123 LM/W | 2       | 10.7"    |
| 100W    | 12,300 LM        | 123 LM/W | 3       | 13.5"    |
| 120W    | 14,760 LM        | 123 LM/W | 4       | 16.3"    |
| 150W    | 28,450 LM        | 123 LM/W | 5       | 19.1"    |
| 200W    | 24,600 LM        | 123 LM/W | 6       | 21.9"    |
| 250W    | 30,750 LM        | 123 LM/W | 7       | 24.7"    |
| 300W    | 36,900 LM        | 123 LM/W | 8       | 27.5"    |

**Notes**  
Specifications Determined at 5000K and 80° Beam Angle

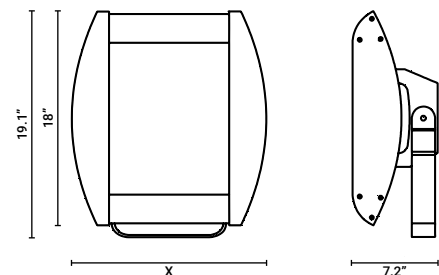**PRODUCT DIMENSIONS**

## ZPT

FLEXIBLE LED POST TOP LUMINAIRE

**HEAVY-DUTY, IP-66 RATED HOUSING**

The ZPT is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

**FLEXIBLE LIGHT OUTPUT CONFIGURATIONS**

Extensive offering of Wattage, Optics and CCT options allow the ZPT to meet a wide-range of project requirements

**EASY TO INSTALL MOUNTING HARDWARE**

The ZPT comes standard with a Pole Top Arm engineered to be installed on a 2.375" Diameter Pole

**120-277V STANDARD****PRODUCT APPLICATIONS**

Parking Lots                      Playgrounds  
Walkways                         Parks & Recreational Fields  
Streetscapes  
Plazas

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

**ORDERING GUIDE**

Sample Part # ZPT - 100W - 40K - BZ - PC1 - D1


| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | OPTICS                        | HOUSING COLOR        | OPTIONS & ACCESSORIES                  |
|-------|---------|---------------------------|-------------------------------|----------------------|----------------------------------------|
| ZPT   |         |                           |                               |                      |                                        |
|       | 60W     | 30K 3000K - WARM WHITE    | T1 TYPE I                     | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                     |
|       | 100W    | 40K 4000K - NEUTRAL WHITE | T2 TYPE II                    | WH WHITE             | PC2 208/277V PHOTOCELL                 |
|       | 120W    | 50K 5000K - COOL WHITE    | T3 TYPE III                   | BL BLACK             | MS MOTION SENSOR                       |
|       | 150W    | 57K 5700K - DAYLIGHT      | T4 TYPE IV                    | SL SILVER            | D1 0-10V DIMMING                       |
|       | 200W    |                           | 20D TYPE V - 20° BEAM ANGLE   |                      | D2 STEP DIMMING                        |
|       | 250W    |                           | 40D TYPE V - 40° BEAM ANGLE   |                      | NC1 NETWORK CONTROLS FOR ZIGBEE        |
|       | 300W    |                           | 80D TYPE V - 80° BEAM ANGLE   |                      | HS HOUSE-SIDE SHIELD                   |
|       |         |                           | 170D TYPE V - 170° BEAM ANGLE |                      | WG PROTECTIVE WIRE GUARD               |
|       |         |                           |                               |                      | EM EMERGENCY DRIVER                    |
|       |         |                           |                               |                      | V1* 480/347V INPUT (120-277V STANDARD) |

\*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

**PRODUCT SPECIFICATIONS**

| WATTAGE | DELIVERED LUMENS | EFFICACY | MODULES | X: WIDTH |
|---------|------------------|----------|---------|----------|
| 60W     | 7,380 LM         | 123 LM/W | 2       | 10.7"    |
| 100W    | 12,300 LM        | 123 LM/W | 3       | 13.5"    |
| 120W    | 14,760 LM        | 123 LM/W | 4       | 16.3"    |
| 150W    | 28,450 LM        | 123 LM/W | 5       | 19.1"    |
| 200W    | 24,600 LM        | 123 LM/W | 6       | 21.9"    |
| 250W    | 30,750 LM        | 123 LM/W | 7       | 24.7"    |
| 300W    | 36,900 LM        | 123 LM/W | 8       | 27.5"    |

Notes  
Specifications Determined at 5000K and 80° Beam Angle

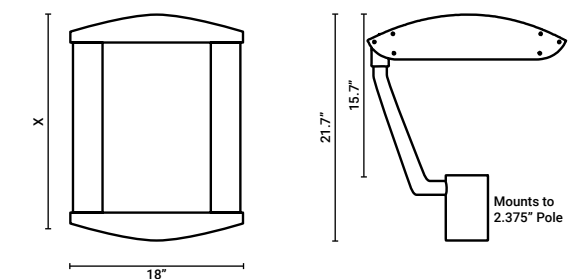**PRODUCT DIMENSIONS**

## ZSL

FLEXIBLE LED POST TOP LUMINAIRE

**HEAVY-DUTY, IP-66 RATED HOUSING**

The ZSL is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

**FLEXIBLE LIGHT OUTPUT CONFIGURATIONS**

Extensive offering of Wattage, Optics and CCT options allow the ZSL to meet a wide-range of project requirements

**EASY TO INSTALL MOUNTING HARDWARE**

The ZSL comes standard with an Integral Slip Fitter engineered to be installed on a 2.375" Diameter Pole

**120-277V STANDARD****PRODUCT APPLICATIONS**

Parking Lots                      Playgrounds  
Walkways                         Parks & Recreational Fields  
Streetscapes  
Plazas

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

**ORDERING GUIDE**


Sample Part # ZSL - 100W - 40K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | OPTICS                        | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|-------------------------------|----------------------|--------------------------------------------------|
| ZSL   |         |                           |                               |                      |                                                  |
|       | 60W     | 30K 3000K - WARM WHITE    | T1 TYPE I                     | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 100W    | 40K 4000K - NEUTRAL WHITE | T2 TYPE II                    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 120W    | 50K 5000K - COOL WHITE    | T3 TYPE III                   | BL BLACK             | MS MOTION SENSOR                                 |
|       | 150W    | 57K 5700K - DAYLIGHT      | T4 TYPE IV                    | SL SILVER            | D1 0-10V DIMMING                                 |
|       | 200W    |                           | 20D TYPE V - 20° BEAM ANGLE   |                      | D2 STEP DIMMING                                  |
|       | 250W    |                           | 40D TYPE V - 40° BEAM ANGLE   |                      | NC1 NETWORK CONTROLS FOR ZIGBEE                  |
|       | 300W    |                           | 80D TYPE V - 80° BEAM ANGLE   |                      | HS HOUSE-SIDE SHIELD                             |
|       |         |                           | 170D TYPE V - 170° BEAM ANGLE |                      | WG PROTECTIVE WIRE GUARD                         |
|       |         |                           |                               |                      | EM EMERGENCY DRIVER                              |
|       |         |                           |                               |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       |         |                           |                               |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

**PRODUCT SPECIFICATIONS**

| WATTAGE | DELIVERED LUMENS | EFFICACY | MODULES | X: WIDTH |
|---------|------------------|----------|---------|----------|
| 60W     | 7,380 LM         | 123 LM/W | 2       | 10.7"    |
| 100W    | 12,300 LM        | 123 LM/W | 3       | 13.5"    |
| 120W    | 14,760 LM        | 123 LM/W | 4       | 16.3"    |
| 150W    | 28,450 LM        | 123 LM/W | 5       | 19.1"    |
| 200W    | 24,600 LM        | 123 LM/W | 6       | 21.9"    |
| 250W    | 30,750 LM        | 123 LM/W | 7       | 24.7"    |
| 300W    | 36,900 LM        | 123 LM/W | 8       | 27.5"    |

Notes  
Specifications Determined at 5000K and 80° Beam Angle

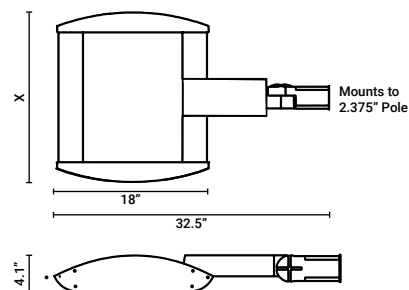**PRODUCT DIMENSIONS**

## ZHB

FLEXIBLE LED HIGH BAY LUMINAIRE

**HEAVY-DUTY, IP-66 RATED HOUSING**

The ZHB is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

**FLEXIBLE LIGHT OUTPUT CONFIGURATIONS**

Extensive offering of Wattage, Optics and CCT options allow the ZHB to meet a wide-range of project requirements

**EASY TO INSTALL MOUNTING HARDWARE**

The ZHB comes standard with a Eye-Hook Mounting Bracket engineered to be installed within a variety of High-Bay Applications; 12" & 18" Pendant Mounts are available as an option

**120-277V STANDARD****PRODUCT APPLICATIONS**

Warehouses                      Gymnasiums  
Industrial Buildings          Rec Centers/Arenas  
Shipping Centers              Cold Storage

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

**ORDERING GUIDE**

Sample Part # ZHB - 100W - 41K - BZ - MS - D1


| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | OPTICS                        | HOUSING COLOR        | OPTIONS & ACCESSORIES                  |
|-------|---------|---------------------------|-------------------------------|----------------------|----------------------------------------|
| ZHB   |         |                           |                               |                      |                                        |
|       | 60W     | 30K 3000K - WARM WHITE    | T1 TYPE I                     | BZ BRONZE (STANDARD) | MS MOTION SENSOR                       |
|       | 100W    | 40K 4000K - NEUTRAL WHITE | T2 TYPE II                    | WH WHITE             | D1 0-10V DIMMING                       |
|       | 120W    | 50K 5000K - COOL WHITE    | T3 TYPE III                   | BL BLACK             | D2 STEP DIMMING                        |
|       | 150W    | 57K 5700K - DAYLIGHT      | T4 TYPE IV                    | SL SILVER            | NC1 NETWORK CONTROLS FOR ZIGBEE        |
|       | 200W    |                           | 20D TYPE V - 20° BEAM ANGLE   |                      | WG PROTECTIVE WIRE GUARD               |
|       | 250W    |                           | 40D TYPE V - 40° BEAM ANGLE   |                      | P1 12" PENDANT MOUNT                   |
|       | 300W    |                           | 80D TYPE V - 80° BEAM ANGLE   |                      | P2 18" PENDANT MOUNT                   |
|       |         |                           | 170D TYPE V - 170° BEAM ANGLE |                      | EM EMERGENCY DRIVER                    |
|       |         |                           |                               |                      | SC SAFETY CHAIN                        |
|       |         |                           |                               |                      | V1* 480/347V INPUT (120-277V STANDARD) |

\*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR


**PRODUCT SPECIFICATIONS**

| WATTAGE | DELIVERED LUMENS | EFFICACY | MODULES | X: WIDTH |
|---------|------------------|----------|---------|----------|
| 60W     | 7,380 LM         | 123 LM/W | 2       | 10.7"    |
| 100W    | 12,300 LM        | 123 LM/W | 3       | 13.5"    |
| 120W    | 14,760 LM        | 123 LM/W | 4       | 16.3"    |
| 150W    | 28,450 LM        | 123 LM/W | 5       | 19.1"    |
| 200W    | 24,600 LM        | 123 LM/W | 6       | 21.9"    |
| 250W    | 30,750 LM        | 123 LM/W | 7       | 24.7"    |
| 300W    | 36,900 LM        | 123 LM/W | 8       | 27.5"    |

Notes  
Specifications Determined at 5000K and 80° Beam Angle

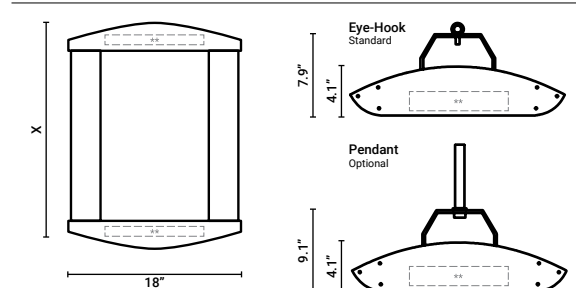**PRODUCT DIMENSIONS**

\*\*Driver & Optional EM Mounted Inside End-Caps

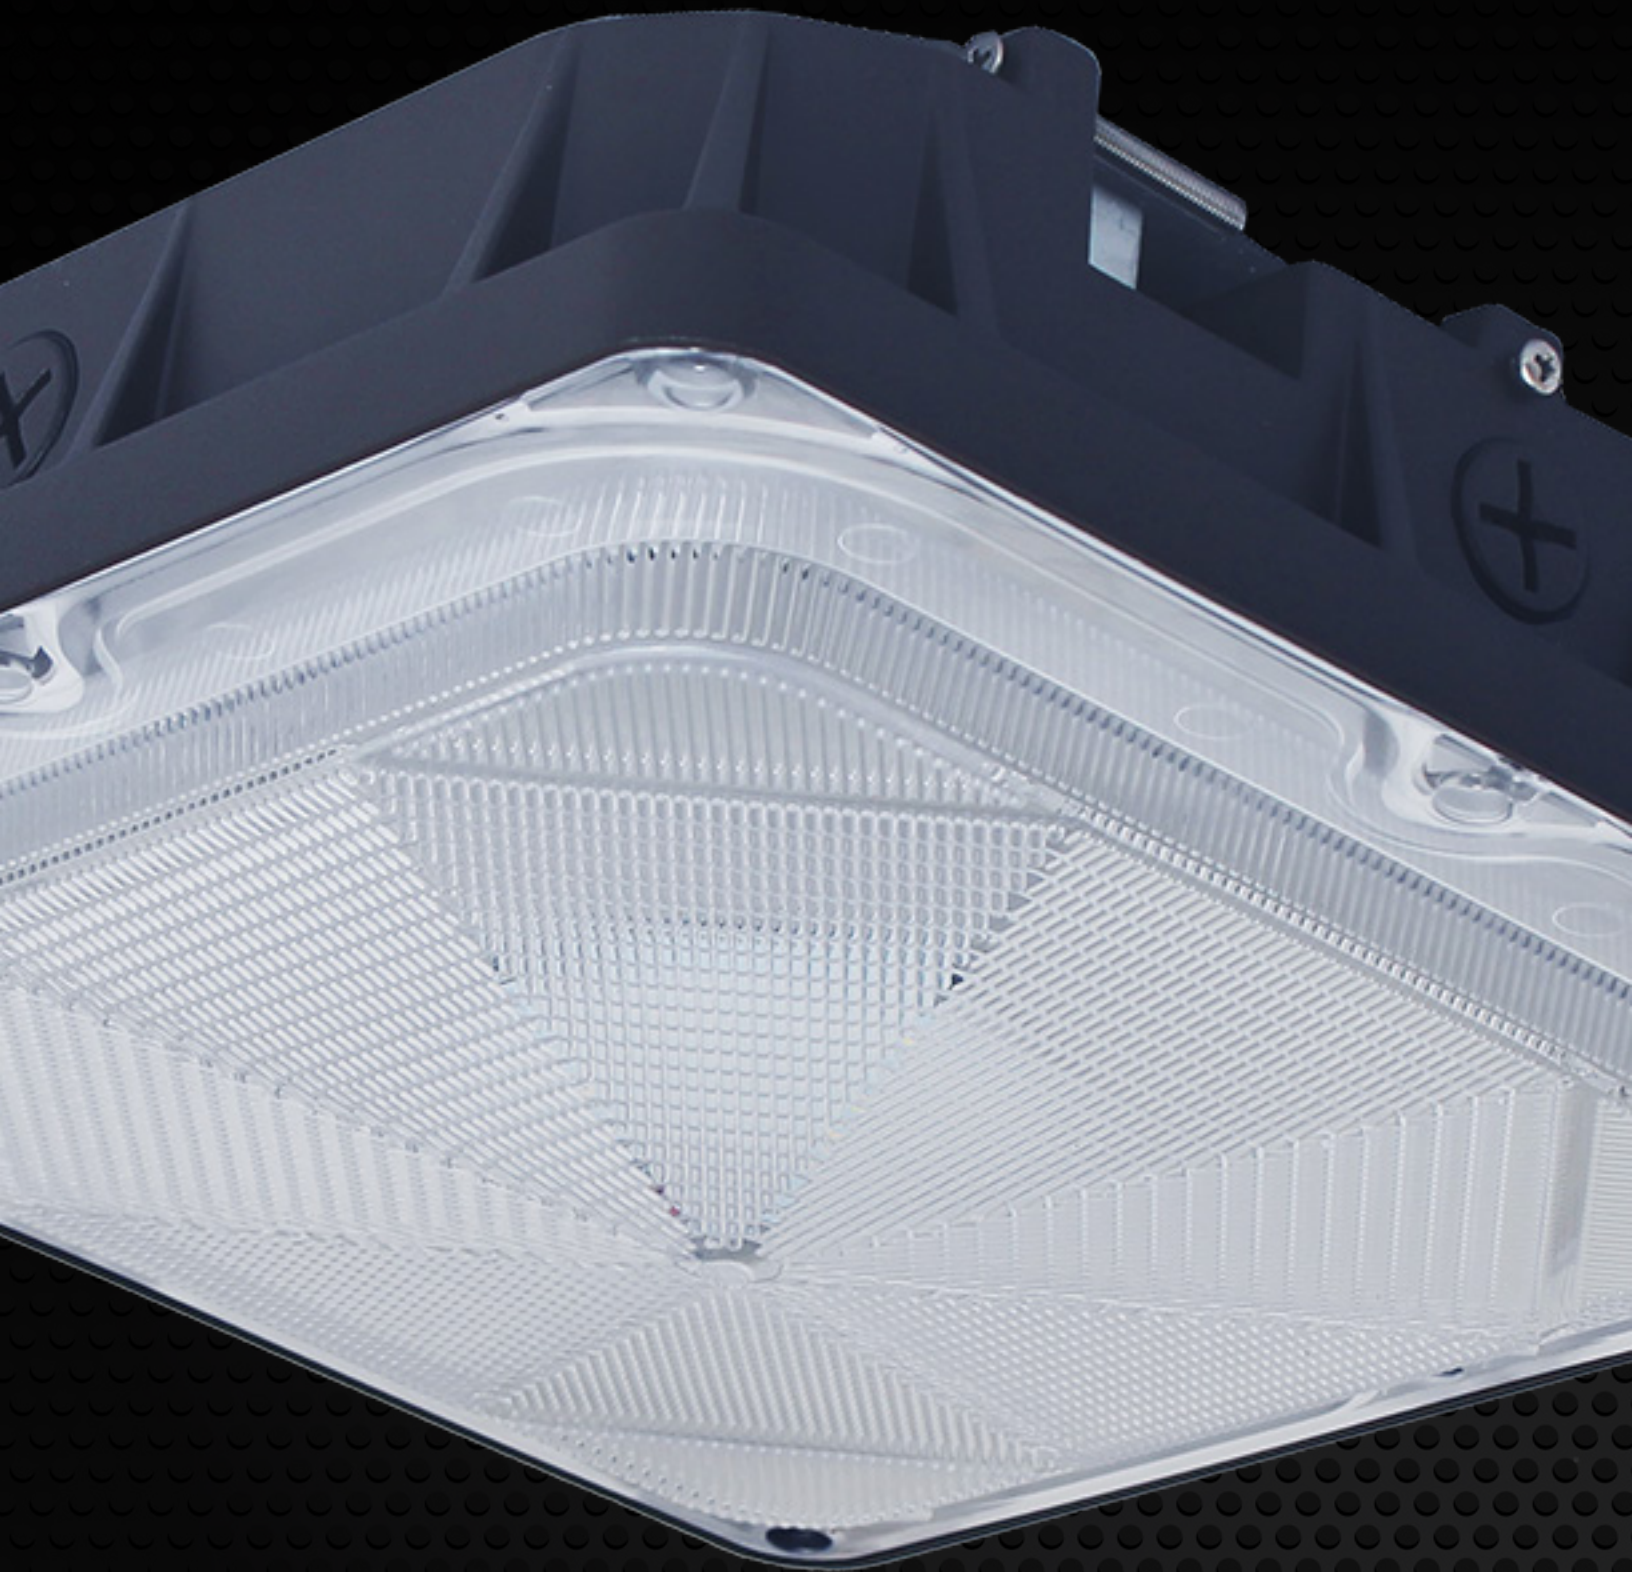

# ***EXTERIOR LIGHTING***

**A VERSATILE RANGE OF PRODUCTS IN  
BOTH CLASSIC AND MODERN DESIGN**



Wallpack  
Canopy & Garage  
Floodlight  
Area & Post Top

***PARAFLEX***

## **// WALLPACK**

# WP390

LED WALLPACK LUMINAIRE



SINGLE BAR VERSION



DOUBLE BAR VERSION

## HEAVY-DUTY, 360° ADJUSTABLE HOUSING

Die Cast Aluminum Housing with Durable, Dark Bronze Powder Coat Finish, and Polycarbonate Lens

## IP-65 RATED WET LOCATION RATED

Engineered and Constructed for Exterior Environments

## DLC PREMIUM

The WP390 Meets the Highest Classification of Efficacy and Lumen Maintenance

## 120-277V STANDARD

## PRODUCT APPLICATIONS

Building Entrances      Bridges  
Walkways                  Catwalks  
Tunnels                    Stairwells  
Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # WP390 - 60W - 50K - BZ

| MODEL | WATTAGE                                                                                              | COLOR TEMPERATURE (CCT)                             | HOUSING COLOR        | OPTIONS & ACCESSORIES          |
|-------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------|----------------------|--------------------------------|
| WP390 | 25W SINGLE BAR VERSION<br>40W SINGLE BAR VERSION<br>60W DOUBLE BAR VERSION<br>80W DOUBLE BAR VERSION | 40K 4100K - NEUTRAL WHITE<br>50K 5000K - COOL WHITE | BZ BRONZE (STANDARD) | PC3 120V PENCIL TYPE PHOTOCELL |


## PRODUCT SPECIFICATIONS

| WATTAGE | CCT   | DELIVERED LUMENS | EFFICACY | CRI |
|---------|-------|------------------|----------|-----|
| 25W     | 4000K | 3,325 LM         | 127 LM/W | >70 |
| 25W     | 5000K | 3,280 LM         | 130 LM/W | >70 |
| 40W     | 4000K | 5,238 LM         | 126 LM/W | >70 |
| 40W     | 5000K | 5,131 LM         | 128 LM/W | >70 |
| 60W     | 4000K | 7,809 LM         | 129 LM/W | >70 |
| 60W     | 5000K | 7,854 LM         | 130 LM/W | >70 |
| 80W     | 4000K | 10,598 LM        | 133 LM/W | >70 |
| 80W     | 5000K | 10,598 LM        | 133 LM/W | >70 |

## 25-40W SINGLE BAR PRODUCT DIMENSIONS



## 60-80W DOUBLE BAR PRODUCT DIMENSIONS

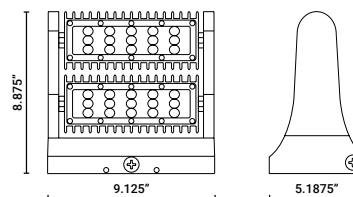

# WP290

LED WALLPACK LUMINAIRE



## COMPACT, DURABLE HOUSING

The WP290 is a Small Wallpack with a Die Cast Aluminum Housing and Polycarbonate Lens

## WET LOCATION, IP-65 RATED

Seamless Gasket Engineered to Prevent Leaks and Provide Installation within Exterior Environments

## INTEGRAL PHOTOCELL

The WP290 was Engineered with a Integral Button Photocell

## 120-277V STANDARD

## PRODUCT APPLICATIONS

|                    |                    |
|--------------------|--------------------|
| Building Entrances | Bridges            |
| Walkways           | Catwalks           |
| Tunnels            | Stairwells         |
| Loading Docks      | Building Exteriors |

## ORDERING GUIDE

Sample Part # WP290 - 20W - 50K - BZ - PC

| MODEL           | WATTAGE | COLOR TEMPERATURE (CCT)                           | HOUSING COLOR        | OPTIONS & ACCESSORIES              |
|-----------------|---------|---------------------------------------------------|----------------------|------------------------------------|
| WP290           | 20W     | 30K 3000K - WARM WHITE*<br>50K 5000K - COOL WHITE | BZ BRONZE (STANDARD) | PC 120V-277V BUTTON TYPE PHOTOCELL |
| *NOT DLC LISTED |         |                                                   |                      |                                    |


## PRODUCT SPECIFICATIONS

| WATTAGE | CCT   | DELIVERED LUMENS | EFFICACY | CRI |
|---------|-------|------------------|----------|-----|
| 20W     | 3000K | 2,381 LM         | 121 LM/W | >80 |
| 20W     | 5000K | 2,472 LM         | 126 LM/W | >80 |

## DLC LISTINGS

WP290 - 20W - 50K - BZ - PC

## PRODUCT DIMENSIONS

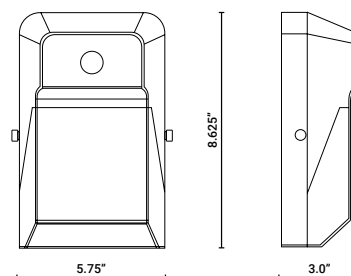

# DCSLM

LOW-PROFILE LED WALLPACK LUMINAIRE



## LOW PROFILE, IP-65 RATED HOUSING

The Compact Housing is constructed with a Die Cast Aluminum Body and Heat and Impact Resistant Glass

## WET LOCATION RATED

Engineered and Constructed for Exterior Environments

## ADJUSTABLE BEAM ANGLE

The DCSLM provides a Customizable Beam that adjusts from Full Cut-Off to 65° to provide the right angle of light for your project

## 120-277V STANDARD

## PRODUCT APPLICATIONS

|                    |            |
|--------------------|------------|
| Building Entrances | Bridges    |
| Walkways           | Catwalks   |
| Tunnels            | Stairwells |
| Loading Docks      |            |

## ORDERING GUIDE

Sample Part # DCSLM - 50W - 50K - BZ - PC1

| MODEL | WATTAGE                          | COLOR TEMPERATURE (CCT)                                                       | HOUSING COLOR        | OPTIONS & ACCESSORIES                                                                      |
|-------|----------------------------------|-------------------------------------------------------------------------------|----------------------|--------------------------------------------------------------------------------------------|
| DCSLM | 12W<br>28W<br>50W<br>80W<br>120W | 30K 3000K - WARM WHITE<br>40K 4100K - NEUTRAL WHITE<br>50K 5000K - COOL WHITE | BZ BRONZE (STANDARD) | PC1 120V BUTTON TYPE PHOTOCELL<br>PC2 208/277V PHOTOCELL<br>PC3 120V PENCIL TYPE PHOTOCELL |

## PRODUCT SPECIFICATIONS

| WATTAGE | CCT   | DELIVERED LUMENS | EFFICACY | CRI | 12W PRODUCT DIMENSIONS | 28-50W PRODUCT DIMENSIONS |
|---------|-------|------------------|----------|-----|------------------------|---------------------------|
| 12W     | 3000K | 1,211 LM         | 99 LM/W  | >80 |                        |                           |
| 12W     | 4000K | 1,285 LM         | 109 LM/W | >80 |                        |                           |
| 12W     | 5000K | 1,321 LM         | 111 LM/W | >80 |                        |                           |
| 28W     | 3000K | 3,099 LM         | 111 LM/W | >80 |                        |                           |
| 28W     | 4000K | 3,239 LM         | 116 LM/W | >80 |                        |                           |
| 28W     | 5000K | 3,298 LM         | 120 LM/W | >80 |                        |                           |
| 50W     | 3000K | 4,920 LM         | 102 LM/W | >80 |                        |                           |
| 50W     | 4000K | 5,193 LM         | 105 LM/W | >80 |                        |                           |
| 50W     | 5000K | 5,287 LM         | 108 LM/W | >80 |                        |                           |
| 80W     | 3000K | 8,820 LM         | 110 LM/W | >80 |                        |                           |
| 80W     | 4000K | 9,056 LM         | 112 LM/W | >80 |                        |                           |
| 80W     | 5000K | 9,241 LM         | 115 LM/W | >80 |                        |                           |
| 120W    | 3000K | 13,106 LM        | 106 LM/W | >80 |                        |                           |
| 120W    | 4000K | 13,796 LM        | 111 LM/W | >80 |                        |                           |
| 120W    | 5000K | 14,227 LM        | 116 LM/W | >80 |                        |                           |

# DC150-90

CUT-OFF LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



## FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC150-90 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC150-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

## 120-277V STANDARD

## TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Building Entrances      Bridges  
Walkways                  Catwalks  
Tunnels                    Stairwells  
Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DC150-90 - 12W - 35K - BZ - PC1 - D1

| MODEL    | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|----------|---------|---------------------------|----------------------|--------------------------------------------------|
| DC150-90 |         |                           |                      |                                                  |
|          | 12W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|          | 24W     | 30K 3000K - WARM WHITE    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|          | 36W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | MS MOTION SENSOR                                 |
|          | 48W     | 40K 4000K - NEUTRAL WHITE | SL SILVER            | D1 0-10V DIMMING                                 |
|          | 60W     | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      | D2 STEP DIMMING (120V ONLY)                      |
|          | 72W     | 55K 5500K - DAYLIGHT      |                      | EM EMERGENCY BATTERY PACK                        |
|          |         |                           |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|          |         |                           |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS    | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|-----------|----------|-------------|
| 12W             | 12.65          | 3000K | 1,530.00  | 120.95   | PREMIUM     |
| 12W             | 12.65          | 4000K | 1,606.50  | 127.00   | PREMIUM     |
| 12W             | 12.65          | 5000K | 1,686.83  | 133.35   | PREMIUM     |
| 24W             | 23.68          | 3000K | 3,060.00  | 129.22   | PREMIUM     |
| 24W             | 23.68          | 4000K | 3,213.00  | 135.68   | PREMIUM     |
| 24W             | 23.68          | 5000K | 3,373.65  | 142.47   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,590.00  | 133.94   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,819.50  | 140.63   | PREMIUM     |
| 36W             | 34.27          | 5000K | 5,060.48  | 147.66   | PREMIUM     |
| 48W             | 46.60          | 3000K | 6,120.00  | 131.33   | PREMIUM     |
| 48W             | 46.60          | 4000K | 6,426.00  | 137.90   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,747.30  | 144.79   | PREMIUM     |
| 60W             | 56.83          | 3000K | 7,650.00  | 134.61   | PREMIUM     |
| 60W             | 56.83          | 4000K | 8,032.50  | 141.34   | PREMIUM     |
| 60W             | 56.83          | 5000K | 8,434.13  | 148.41   | PREMIUM     |
| 72W             | 67.65          | 3000K | 9,180.00  | 135.70   | PREMIUM     |
| 72W             | 67.65          | 4000K | 9,639.00  | 142.48   | PREMIUM     |
| 72W             | 67.65          | 5000K | 10,121.00 | 149.61   | PREMIUM     |

## PRODUCT DIMENSIONS

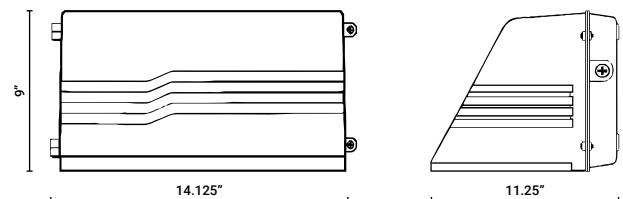

## POWER

POWER FACTOR >0.90 - THD <20

# DC200-90

CUT-OFF LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



## FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC200-90 is a Large 18" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC200-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

## 120-277V STANDARD TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Building Entrances Bridges  
Walkways Catwalks  
Tunnels Stairwells  
Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DC200-90 - 12W - 35K - BZ - PC1 - D1

| MODEL    | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|----------|---------|---------------------------|----------------------|--------------------------------------------------|
| DC200-90 |         |                           |                      |                                                  |
|          | 12W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|          | 24W     | 30K 3000K - WARM WHITE    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|          | 36W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | MS MOTION SENSOR                                 |
|          | 48W     | 40K 4000K - NEUTRAL WHITE | SL SILVER            | D1 0-10V DIMMING                                 |
|          | 60W     | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      | D2 STEP DIMMING (120V ONLY)                      |
|          | 72W     | 55K 5500K - DAYLIGHT      |                      | EM EMERGENCY BATTERY PACK                        |
|          | 84W     |                           |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|          | 96W     |                           |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS    | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|-----------|----------|-------------|
| 12W             | 12.65          | 3000K | 1,530.00  | 120.95   | PREMIUM     |
| 12W             | 12.65          | 4000K | 1,606.50  | 127.00   | PREMIUM     |
| 12W             | 12.65          | 5000K | 1,686.83  | 133.35   | PREMIUM     |
| 24W             | 23.68          | 3000K | 3,060.00  | 129.22   | PREMIUM     |
| 24W             | 23.68          | 4000K | 3,213.00  | 135.68   | PREMIUM     |
| 24W             | 23.68          | 5000K | 3,373.65  | 142.47   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,008.38  | 116.96   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,208.79  | 122.81   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,419.23  | 128.95   | PREMIUM     |
| 48W             | 45.80          | 3000K | 5,344.50  | 116.69   | PREMIUM     |
| 48W             | 45.80          | 4000K | 5,611.73  | 122.53   | PREMIUM     |
| 48W             | 45.80          | 5000K | 5,892.31  | 128.65   | PREMIUM     |
| 60W             | 56.83          | 3000K | 6,680.63  | 117.55   | PREMIUM     |
| 60W             | 56.83          | 4000K | 7,014.66  | 123.43   | PREMIUM     |
| 60W             | 56.83          | 5000K | 7,365.39  | 129.60   | PREMIUM     |
| 72W             | 67.65          | 3000K | 8,016.75  | 118.50   | STANDARD    |
| 72W             | 67.65          | 4000K | 8,417.59  | 124.43   | STANDARD    |
| 72W             | 67.65          | 5000K | 8,838.47  | 130.65   | STANDARD    |
| 84W             | 80.12          | 3000K | 9,352.88  | 116.74   | STANDARD    |
| 84W             | 80.12          | 4000K | 9,820.52  | 122.57   | STANDARD    |
| 84W             | 80.12          | 5000K | 10,311.54 | 128.70   | STANDARD    |
| 96W             | 91.65          | 3000K | 10,689.00 | 116.63   | STANDARD    |
| 96W             | 91.65          | 4000K | 11,223.45 | 122.46   | STANDARD    |
| 96W             | 91.65          | 5000K | 11,784.62 | 128.58   | STANDARD    |

## PRODUCT DIMENSIONS

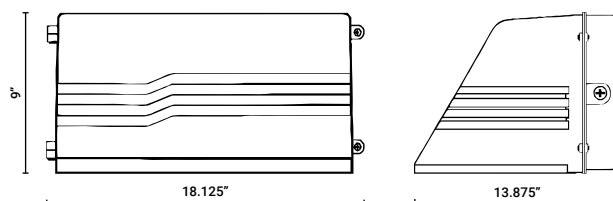

## POWER

POWER FACTOR >0.90 - THD <20

## DCST

CUT-OFF LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



### FULL CUT-OFF, HEAVY-DUTY HOUSING

The DCST is a 14" Trapezoid Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The DCST can be Directly Mounted over an Existing 4" Outlet Box with a 4" x 4" Gasketed Wall Plate

### 120-277V STANDARD

### TYPE V DISTRIBUTION

### PRODUCT APPLICATIONS

Building Entrances      Bridges  
Walkways                  Catwalks  
Tunnels                    Stairwells  
Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DCST - 12W - 35K - BZ - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|----------------------|--------------------------------------------------|
| DCST  |         |                           |                      |                                                  |
|       | 12W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | MS MOTION SENSOR                                 |
|       | 24W     | 30K 3000K - WARM WHITE    | WH WHITE             | D1 0-10V DIMMING                                 |
|       | 36W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | D2 STEP DIMMING (120V ONLY)                      |
|       | 48W     | 40K 4000K - NEUTRAL WHITE | SL SILVER            | EM EMERGENCY BATTERY PACK                        |
|       | 60W     | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       | 72W     | 55K 5500K - DAYLIGHT      |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 12W             | 12.65          | 3000K | 1,530.00 | 120.95   | PREMIUM     |
| 12W             | 12.65          | 4000K | 1,606.50 | 127.00   | PREMIUM     |
| 12W             | 12.65          | 5000K | 1,686.83 | 133.35   | PREMIUM     |
| 24W             | 23.68          | 3000K | 3,060.00 | 129.22   | PREMIUM     |
| 24W             | 23.68          | 4000K | 3,213.00 | 135.68   | PREMIUM     |
| 24W             | 23.68          | 5000K | 3,373.65 | 142.47   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,147.00 | 121.01   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,354.35 | 127.06   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,572.07 | 133.41   | PREMIUM     |
| 48W             | 45.80          | 3000K | 5,529.33 | 120.73   | PREMIUM     |
| 48W             | 45.80          | 4000K | 5,805.80 | 126.76   | PREMIUM     |
| 48W             | 45.80          | 5000K | 6,096.09 | 133.10   | PREMIUM     |
| 60W             | 56.83          | 3000K | 6,911.67 | 121.62   | PREMIUM     |
| 60W             | 56.83          | 4000K | 7,257.25 | 127.70   | PREMIUM     |
| 60W             | 56.83          | 5000K | 7,620.11 | 134.09   | PREMIUM     |
| 72W             | 67.65          | 3000K | 8,294.00 | 122.60   | PREMIUM     |
| 72W             | 67.65          | 4000K | 8,708.70 | 128.73   | PREMIUM     |
| 72W             | 67.65          | 5000K | 9,144.14 | 135.17   | PREMIUM     |

## PRODUCT DIMENSIONS

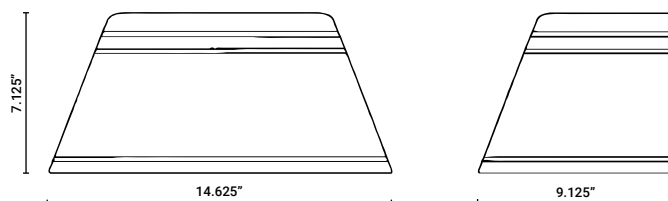

## POWER

POWER FACTOR >0.90 - THD <20

# DC102

LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



## COMPACT, HEAVY-DUTY HOUSING

The DC102 is a Small 9" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC102 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

## 120-277V STANDARD

## TYPE IV DISTRIBUTION

## PRODUCT APPLICATIONS

|                    |                    |
|--------------------|--------------------|
| Building Entrances | Bridges            |
| Walkways           | Catwalks           |
| Tunnels            | Stairwells         |
| Loading Docks      | Building Exteriors |

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DC102 - 12W - 35K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|----------------------|--------------------------------------------------|
| DC102 |         |                           |                      |                                                  |
|       | 12W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 24W     | 30K 3000K - WARM WHITE    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 36W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | MS MOTION SENSOR                                 |
|       |         | 40K 4000K - NEUTRAL WHITE | SL SILVER            | D1 0-10V DIMMING                                 |
|       |         | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      | D2 STEP DIMMING (120V ONLY)                      |
|       |         | 55K 5500K - DAYLIGHT      |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       |         |                           |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 12W             | 12.72          | 3000K | 1,393.50 | 109.55   | STANDARD    |
| 12W             | 12.72          | 4000K | 1,463.18 | 115.03   | STANDARD    |
| 12W             | 12.72          | 5000K | 1,536.33 | 120.78   | STANDARD    |
| 24W             | 23.57          | 3000K | 2,787.00 | 118.24   | STANDARD    |
| 24W             | 23.57          | 4000K | 2,926.35 | 124.16   | STANDARD    |
| 24W             | 23.57          | 5000K | 3,072.67 | 130.36   | STANDARD    |
| 36W             | 34.27          | 3000K | 4,180.50 | 121.99   | STANDARD    |
| 36W             | 34.27          | 4000K | 4,389.53 | 128.09   | STANDARD    |
| 36W             | 34.27          | 5000K | 4,609.00 | 134.49   | STANDARD    |

## PRODUCT DIMENSIONS

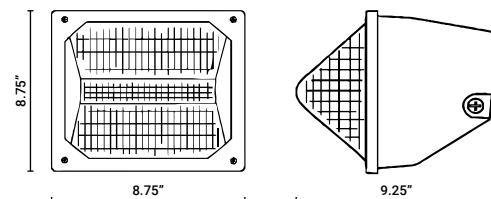

## POWER

POWER FACTOR >0.90 - THD <20

# DC150

LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



## HEAVY-DUTY HOUSING

The DC150 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC150 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

## 120-277V STANDARD

## TYPE IV DISTRIBUTION

## PRODUCT APPLICATIONS

Building Entrances      Bridges  
Walkways                  Catwalks  
Tunnels                    Stairwells  
Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE

Sample Part # DC150 - 12W - 35K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES       |
|-------|---------|---------------------------|----------------------|-----------------------------|
| DC150 |         |                           |                      |                             |
|       | 12W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL          |
|       | 24W     | 30K 3000K - WARM WHITE    | WH WHITE             | PC2 208/277V PHOTOCELL      |
|       | 36W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | MS MOTION SENSOR            |
|       | 48W     | 40K 4000K - NEUTRAL WHITE | SL SILVER            | D1 0-10V DIMMING            |
|       | 60W     | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      | D2 STEP DIMMING (120V ONLY) |
|       | 72W     | 55K 5500K - DAYLIGHT      |                      | EM EMERGENCY BATTERY PACK   |


V1\* 480/347V INPUT (120-277V STANDARD)

\*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS  | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|---------|----------|-------------|
| 12W             | 12.72          | 3000K | 1457.50 | 114.58   | STANDARD    |
| 12W             | 12.72          | 4000K | 1530.38 | 120.31   | STANDARD    |
| 12W             | 12.72          | 5000K | 1606.89 | 126.33   | STANDARD    |
| 24W             | 23.02          | 3000K | 2915.00 | 126.63   | STANDARD    |
| 24W             | 23.02          | 4000K | 3060.75 | 132.96   | STANDARD    |
| 24W             | 23.02          | 5000K | 3213.79 | 139.61   | STANDARD    |
| 36W             | 34.27          | 3000K | 4372.50 | 127.59   | STANDARD    |
| 36W             | 34.27          | 4000K | 4591.12 | 133.97   | STANDARD    |
| 36W             | 34.27          | 5000K | 4820.68 | 140.67   | STANDARD    |
| 48W             | 46.60          | 3000K | 5588.65 | 119.93   | STANDARD    |
| 48W             | 46.60          | 4000K | 5756.31 | 123.53   | STANDARD    |
| 48W             | 46.60          | 5000K | 5929.00 | 127.23   | STANDARD    |
| 60W             | 56.83          | 3000K | 6719.78 | 118.24   | STANDARD    |
| 60W             | 56.83          | 4000K | 7055.77 | 124.16   | STANDARD    |
| 60W             | 56.83          | 5000K | 7408.56 | 130.36   | STANDARD    |
| 72W             | 67.65          | 3000K | 8252.43 | 121.99   | STANDARD    |
| 72W             | 67.65          | 4000K | 8665.05 | 128.09   | STANDARD    |
| 72W             | 67.65          | 5000K | 9098.31 | 134.49   | STANDARD    |

## PRODUCT DIMENSIONS

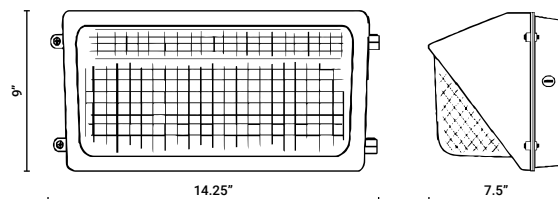

## POWER

POWER FACTOR >0.90 - THD <20

# DC200

LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



## LARGE, HEAVY-DUTY HOUSING

The DC200 is a Large 18" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC200 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

## 120-277V STANDARD

## TYPE IV DISTRIBUTION

## PRODUCT APPLICATIONS

Building Entrances      Bridges  
Walkways                  Catwalks  
Tunnels                    Stairwells  
Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DC200 - 12W - 35K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|----------------------|--------------------------------------------------|
| DC200 |         |                           |                      |                                                  |
|       | 12W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 24W     | 30K 3000K - WARM WHITE    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 36W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | MS MOTION SENSOR                                 |
|       | 48W     | 40K 4000K - NEUTRAL WHITE | SL SILVER            | D1 0-10V DIMMING                                 |
|       | 60W     | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      | D2 STEP DIMMING (120V ONLY)                      |
|       | 72W     | 55K 5500K - DAYLIGHT      |                      | EM EMERGENCY BATTERY PACK                        |
|       | 84W     |                           |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       | 96W     |                           |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS    | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|-----------|----------|-------------|
| 12W             | 12.72          | 3000K | 1,480.50  | 116.39   | STANDARD    |
| 12W             | 12.72          | 4000K | 1,554.53  | 122.21   | STANDARD    |
| 12W             | 12.72          | 5000K | 1,632.25  | 128.32   | STANDARD    |
| 24W             | 23.68          | 3000K | 2,961.00  | 125.04   | STANDARD    |
| 24W             | 23.68          | 4000K | 3,109.05  | 131.29   | STANDARD    |
| 24W             | 23.68          | 5000K | 3,264.50  | 137.86   | STANDARD    |
| 36W             | 34.27          | 3000K | 4,441.50  | 129.60   | STANDARD    |
| 36W             | 34.27          | 4000K | 4,663.58  | 136.08   | STANDARD    |
| 36W             | 34.27          | 5000K | 4,896.75  | 142.89   | STANDARD    |
| 48W             | 46.60          | 3000K | 5,922.00  | 127.08   | STANDARD    |
| 48W             | 46.60          | 4000K | 6,218.10  | 133.44   | STANDARD    |
| 48W             | 46.60          | 5000K | 6,529.01  | 140.11   | STANDARD    |
| 60W             | 56.83          | 3000K | 7,402.50  | 130.26   | STANDARD    |
| 60W             | 56.83          | 4000K | 7,772.63  | 136.77   | STANDARD    |
| 60W             | 56.83          | 5000K | 8,161.26  | 143.61   | STANDARD    |
| 72W             | 67.65          | 3000K | 8,883.00  | 131.31   | STANDARD    |
| 72W             | 67.65          | 4000K | 9,327.15  | 137.87   | STANDARD    |
| 72W             | 67.65          | 5000K | 9,793.51  | 144.77   | STANDARD    |
| 84W             | 81.55          | 3000K | 10,363.50 | 127.08   | NONE        |
| 84W             | 81.55          | 4000K | 10,881.68 | 133.44   | NONE        |
| 84W             | 81.55          | 5000K | 11,425.76 | 140.11   | NONE        |
| 96W             | 91.65          | 3000K | 11,844.00 | 129.23   | NONE        |
| 96W             | 91.65          | 4000K | 12,436.20 | 135.69   | NONE        |
| 96W             | 91.65          | 5000K | 13,058.01 | 142.48   | NONE        |

## PRODUCT DIMENSIONS

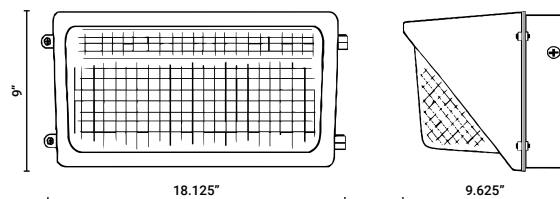

## POWER

POWER FACTOR >0.90 - THD <20

# DCSHM

ROUND LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



## FULL CUT-OFF, HEAVY-DUTY HOUSING

The DCSHM is an 18" Half-Moon Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

4" x 4" Gasketed Wall Plate allows the Installer to Quickly Mount and Wire the Fixture without Opening the Housing

## 120-277V STANDARD

## TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Building Entrances  
Walkways  
Tunnels  
Loading Docks

Bridges  
Catwalks  
Stairwells

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DCSHM - 12W - 35K - BZ - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|----------------------|--------------------------------------------------|
| DCSHM |         |                           |                      |                                                  |
|       | 12W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | MS MOTION SENSOR                                 |
|       | 24W     | 30K 3000K - WARM WHITE    | WH WHITE             | D1 0-10V DIMMING                                 |
|       | 36W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | D2 STEP DIMMING (120V ONLY)                      |
|       | 48W     | 40K 4000K - NEUTRAL WHITE | SL SILVER            | EM EMERGENCY BATTERY PACK                        |
|       | 60W     | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       |         | 55K 5500K - DAYLIGHT      |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 12W             | 12.65          | 3000K | 1,530.00 | 120.95   | PREMIUM     |
| 12W             | 12.65          | 4000K | 1,606.50 | 127.00   | PREMIUM     |
| 12W             | 12.65          | 5000K | 1,686.83 | 133.35   | PREMIUM     |
| 24W             | 23.68          | 3000K | 2,802.00 | 118.33   | PREMIUM     |
| 24W             | 23.68          | 4000K | 2,942.10 | 124.24   | PREMIUM     |
| 24W             | 23.68          | 5000K | 3,089.21 | 130.46   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,203.00 | 122.64   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,413.15 | 128.78   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,633.81 | 135.21   | PREMIUM     |
| 48W             | 46.60          | 3000K | 5,604.00 | 120.26   | PREMIUM     |
| 48W             | 46.60          | 4000K | 5,884.20 | 126.27   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,178.41 | 132.58   | PREMIUM     |
| 60W             | 56.83          | 3000K | 7,005.00 | 123.26   | PREMIUM     |
| 60W             | 56.83          | 4000K | 7,355.25 | 129.43   | PREMIUM     |
| 60W             | 56.83          | 5000K | 7,723.01 | 135.90   | PREMIUM     |

## PRODUCT DIMENSIONS

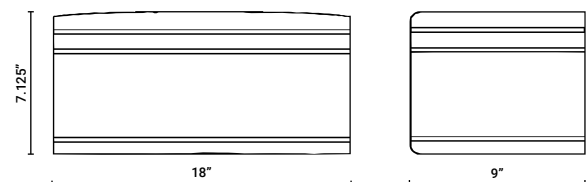

## POWER

POWER FACTOR >0.90 - THD <20

# DCSHM-UD

ROUND UP/DOWN LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



## UPLIGHT/DOWNLIGHT, HEAVY-DUTY HOUSING

The DCSHM is an 18" Half-Moon Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens That Provides a Variety of Uplight and Downlight Options

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

4" x 4" Gasketed Wall Plate allows the Installer to Quickly Mount and Wire the Fixture without Opening the Housing

## 120-277V STANDARD

## PRODUCT APPLICATIONS

Building Entrances      Bridges  
Walkways                  Catwalks  
Tunnels                    Stairwells  
Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DCSHM-UD - 12W - 24W - 35K - BZ - D1

| MODEL    | WATTAGE UP | WATTAGE DOWN | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|----------|------------|--------------|---------------------------|----------------------|--------------------------------------------------|
| DCSHM-UD | 12W        |              |                           |                      |                                                  |
|          |            | 12W          | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | MS MOTION SENSOR                                 |
|          |            | 24W          | 30K 3000K - WARM WHITE    | WH WHITE             | D1 0-10V DIMMING                                 |
|          |            | 36W          | 35K 3500K - NEUTRAL WHITE | BL BLACK             | D2 STEP DIMMING                                  |
|          |            | 48W          | 40K 4000K - NEUTRAL WHITE | SL SILVER            | EM EMERGENCY BATTERY PACK                        |
|          |            | 60W          | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      | V1* 480/347V INPUT (120-277V STANDARD)           |
|          |            |              | 55K 5500K - DAYLIGHT      |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY |
|-----------------|----------------|-------|----------|----------|
| 12W             | 12.65          | 3000K | 1,530.00 | 120.95   |
| 12W             | 12.65          | 4000K | 1,606.50 | 127.00   |
| 12W             | 12.65          | 5000K | 1,686.83 | 133.35   |
| 24W             | 23.68          | 3000K | 2,802.00 | 118.33   |
| 24W             | 23.68          | 4000K | 2,942.10 | 124.24   |
| 24W             | 23.68          | 5000K | 3,089.21 | 130.46   |
| 36W             | 34.27          | 3000K | 4,203.00 | 122.64   |
| 36W             | 34.27          | 4000K | 4,413.15 | 128.78   |
| 36W             | 34.27          | 5000K | 4,633.81 | 135.21   |
| 48W             | 46.60          | 3000K | 5,604.00 | 120.26   |
| 48W             | 46.60          | 4000K | 5,884.20 | 126.27   |
| 48W             | 46.60          | 5000K | 6,178.41 | 132.58   |
| 60W             | 56.83          | 3000K | 7,005.00 | 123.26   |
| 60W             | 56.83          | 4000K | 7,355.25 | 129.43   |
| 60W             | 56.83          | 5000K | 7,723.01 | 135.90   |

## PRODUCT DIMENSIONS

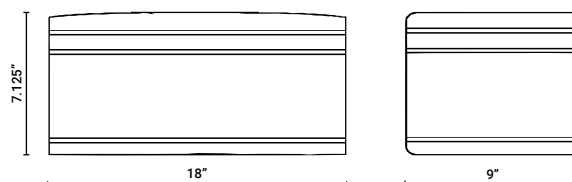

## POWER

POWER FACTOR >0.90 - THD <20

# ZWP-28

LED WALLPACK LUMINAIRE



## HEAVY-DUTY, IP-66 RATED HOUSING

The ZWP-28 is constructed with a Die Cast Aluminum Body and Heat and Impact Resistant Glass to create a Heavy-Duty Housing

## WET LOCATION RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING HARDWARE

The ZWP-28 comes standard with a Removable Wall Mount Bracket engineered to be installed within a variety of Exterior Applications

## 120-277V STANDARD

## PRODUCT APPLICATIONS

|                    |            |
|--------------------|------------|
| Building Entrances | Bridges    |
| Walkways           | Catwalks   |
| Tunnels            | Stairwells |
| Loading Docks      |            |

## ORDERING GUIDE


Sample Part # ZWP - 28W - 50K - SL - DSA

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT) | HOUSING COLOR | OPTIONS & ACCESSORIES                                     |
|-------|---------|-------------------------|---------------|-----------------------------------------------------------|
| ZWP   | 28W     | 50K                     | SL            |                                                           |
|       | 28W     | 50K 5000K - COOL WHITE  | SL SILVER     | DSA DARK SKY ADAPTER<br>TR TRUNNION MOUNT<br>TC TOP COVER |

## PRODUCT SPECIFICATIONS

| WATTAGE | DELIVERED LUMENS | EFFICACY | CRI | EPA  |
|---------|------------------|----------|-----|------|
| 28W     | 3,495 LM         | 126 LM/W | >70 | .323 |

## 28W PRODUCT DIMENSIONS

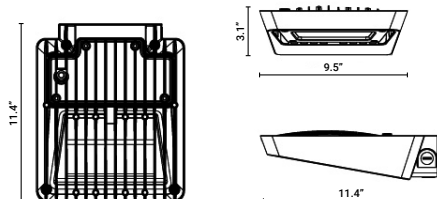

## ZWM

FLEXIBLE LED WALL MOUNT LUMINAIRE



### HEAVY-DUTY, IP-66 RATED HOUSING

The ZWM is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

### FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZWM to meet a wide-range of project requirements

### EASY TO INSTALL MOUNTING HARDWARE

The ZWM comes standard with a Wall Mount Bracket engineered to be installed within a variety of Exterior Applications

### 120-277V STANDARD

### PRODUCT APPLICATIONS

Parking Lots      Bridges  
Walkways      Catwalks  
Tunnels  
Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

### ORDERING GUIDE

Sample Part # ZWM - 100W - 40K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | OPTICS                        | HOUSING COLOR        | OPTIONS & ACCESSORIES                  |
|-------|---------|---------------------------|-------------------------------|----------------------|----------------------------------------|
| ZWM   |         |                           |                               |                      |                                        |
|       | 60W     | 30K 3000K - WARM WHITE    | T1 TYPE I                     | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                     |
|       | 100W    | 40K 4000K - NEUTRAL WHITE | T2 TYPE II                    | WH WHITE             | PC2 208/277V PHOTOCELL                 |
|       | 120W    | 50K 5000K - COOL WHITE    | T3 TYPE III                   | BL BLACK             | MS MOTION SENSOR                       |
|       | 150W    | 57K 5700K - DAYLIGHT      | T4 TYPE IV                    | SL SILVER            | D1 0-10V DIMMING                       |
|       | 200W    |                           | 20D TYPE V - 20° BEAM ANGLE   |                      | D2 STEP DIMMING                        |
|       | 250W    |                           | 40D TYPE V - 40° BEAM ANGLE   |                      | NC1 NETWORK CONTROLS FOR ZIGBEE        |
|       | 300W    |                           | 80D TYPE V - 80° BEAM ANGLE   |                      | HS HOUSE-SIDE SHIELD                   |
|       |         |                           | 170D TYPE V - 170° BEAM ANGLE |                      | WG PROTECTIVE WIRE GUARD               |
|       |         |                           |                               |                      | EM EMERGENCY DRIVER                    |
|       |         |                           |                               |                      | V1* 480/347V INPUT (120-277V STANDARD) |


\*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

### PRODUCT SPECIFICATIONS

| WATTAGE | DELIVERED LUMENS | EFFICACY | MODULES | X: WIDTH |
|---------|------------------|----------|---------|----------|
| 60W     | 7,380 LM         | 123 LM/W | 2       | 10.7"    |
| 100W    | 12,300 LM        | 123 LM/W | 3       | 13.5"    |
| 120W    | 14,760 LM        | 123 LM/W | 4       | 16.3"    |
| 150W    | 28,450 LM        | 123 LM/W | 5       | 19.1"    |
| 200W    | 24,600 LM        | 123 LM/W | 6       | 21.9"    |
| 250W    | 30,750 LM        | 123 LM/W | 7       | 24.7"    |
| 300W    | 36,900 LM        | 123 LM/W | 8       | 27.5"    |

Notes  
Specifications Determined at 5000K and 80° Beam Angle

### PRODUCT DIMENSIONS



## **// CANOPY & GARAGE**

# CL390

LED CANOPY LUMINAIRE



## HEAVY-DUTY, 360° ADJUSTABLE HOUSING

Die Cast Aluminum Housing with Durable, Dark Bronze Powder Coat Finish, and Polycarbonate Lens

## IP-65 RATED WET LOCATION RATED

Engineered and Constructed for Exterior Environments

## MOUNTING PLATE

The CL390 Includes a Mounting Plate for Easy Mounting Over a Junction Box

## 120-277V STANDARD & 0-10V DIMMING STANDARD

## PRODUCT APPLICATIONS

|                |            |
|----------------|------------|
| Parking Garage | Bridges    |
| Walkways       | Catwalks   |
| Tunnels        | Stairwells |
| Storage Areas  |            |

## ORDERING GUIDE

Sample Part # CL390 - 45W - 50K - BZ - PC2

| MODEL | WATTAGE    | COLOR TEMPERATURE (CCT) | HOUSING COLOR        | OPTIONS & ACCESSORIES                                                                      |
|-------|------------|-------------------------|----------------------|--------------------------------------------------------------------------------------------|
| CL390 | 45W<br>80W | 50K 5000K - COOL WHITE  | BZ BRONZE (STANDARD) | PC1 120V BUTTON TYPE PHOTOCELL<br>PC2 208/277V PHOTOCELL<br>PC3 120V PENCIL TYPE PHOTOCELL |

## PRODUCT SPECIFICATIONS

| WATTAGE | CCT   | DELIVERED LUMENS | EFFICACY | CRI |
|---------|-------|------------------|----------|-----|
| 45W     | 5000K | 4,948 LM         | 112 LM/W | >80 |
| 80W     | 5000K | 9,548 LM         | 120 LM/W | >80 |

## HOUSING CONSTRUCTION

Heavy Duty Die Cast Aluminum Housing Gasketed to Provide IP65 rating when Paired with Lens

## LENS CONSTRUCTION

Durable UV- and Heat Resistant Polycarbonate

## DIMENSIONS

45W: 10"x10"x4"  
80W: 14"x14"x4"

## FINISH

High Quality Dark Bronze Powder Coat Rated for Outdoor Locations

## VOLTAGE

120-277V Input Standard. THD <20% Power Factor >90%

## CERTIFICATIONS

cULus conforms to UL 1598 and 8750 conforms to CSA 22.2 & DLC Standard Listed. Complies with FCC (Part 15, Class B). Complies with EN61000-4-5, surge immunity test (1kV).

## OPERATING TEMPERATURE

Wet Location Listed. Suitable for -30C to 40C ambient temperatures

## LUMEN MAINTENANCE

L70 rating of over 60,000 hours

## WARRANTY

Standard 5-Year Warranty

# CV203

LED CANOPY LUMINAIRE



AVAILABLE IN QUICK SHIP



## COMPACT, HEAVY-DUTY HOUSING

The CV203 is a 9" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The CV203 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

## 120-277V STANDARD

## TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Building Canopy      Storage Facilities  
Parking Garages      Gas Stations  
Tunnels

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # CV203 - 12W - 35K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|----------------------|--------------------------------------------------|
| CV203 |         |                           |                      |                                                  |
|       | 12W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 24W     | 30K 3000K - WARM WHITE    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 36W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | MS MOTION SENSOR                                 |
|       |         | 40K 4000K - NEUTRAL WHITE | SL SILVER            | D1 0-10V DIMMING                                 |
|       |         | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      | D2 STEP DIMMING (120V ONLY)                      |
|       |         | 55K 5500K - DAYLIGHT      |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       |         |                           |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS  | EFFICACY |
|-----------------|----------------|-------|---------|----------|
| 12W             | 12.65          | 3000K | 1432.50 | 113.24   |
| 12W             | 12.65          | 4000K | 1475.48 | 116.64   |
| 12W             | 12.65          | 5000K | 1519.74 | 120.14   |
| 24W             | 23.54          | 3000K | 2865.00 | 121.71   |
| 24W             | 23.54          | 4000K | 2950.95 | 125.36   |
| 24W             | 23.54          | 5000K | 3039.48 | 129.12   |
| 36W             | 34.27          | 3000K | 4405.69 | 128.56   |
| 36W             | 34.27          | 4000K | 4537.86 | 132.41   |
| 36W             | 34.27          | 5000K | 4674.00 | 136.39   |

## PRODUCT DIMENSIONS

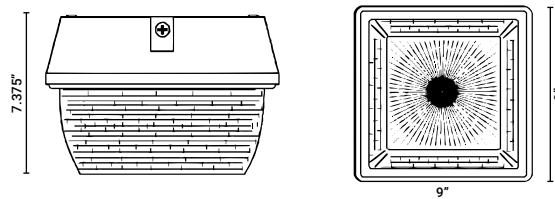

## POWER

POWER FACTOR >0.90 - THD <20

# CV303

LED CANOPY LUMINAIRE



AVAILABLE IN QUICK SHIP



## COMPACT, HEAVY-DUTY HOUSING

The CV303 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The CV303 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

## 120-277V STANDARD TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Building Canopy      Storage Facilities  
Parking Garages      Gas Stations  
Tunnels

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # CV303 - 24W - 35K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|----------------------|--------------------------------------------------|
| CV303 |         |                           |                      |                                                  |
|       | 24W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 36W     | 30K 3000K - WARM WHITE    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 48W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | MS MOTION SENSOR                                 |
|       | 60W     | 40K 4000K - NEUTRAL WHITE | SL SILVER            | D1 0-10V DIMMING                                 |
|       | 72W     | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      | D2 STEP DIMMING (120V ONLY)                      |
|       |         | 55K 5500K - DAYLIGHT      |                      | EM EMERGENCY BATTERY PACK                        |
|       |         |                           |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       |         |                           |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 24W             | 23.54          | 3000K | 2,865.00 | 121.71   | PREMIUM     |
| 24W             | 23.54          | 4000K | 2,950.95 | 125.36   | PREMIUM     |
| 24W             | 23.54          | 5000K | 3,039.48 | 129.12   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,405.69 | 128.56   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,537.86 | 132.41   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,674.00 | 136.39   | PREMIUM     |
| 48W             | 46.60          | 3000K | 5,671.58 | 121.71   | PREMIUM     |
| 48W             | 46.60          | 4000K | 5,841.73 | 125.36   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,016.98 | 129.12   | PREMIUM     |
| 60W             | 56.83          | 3000K | 6,916.65 | 121.71   | PREMIUM     |
| 60W             | 56.83          | 4000K | 7,124.15 | 125.36   | PREMIUM     |
| 60W             | 56.83          | 5000K | 7,337.87 | 129.12   | PREMIUM     |
| 72W             | 67.26          | 3000K | 8,156.00 | 121.26   | PREMIUM     |
| 72W             | 67.26          | 4000K | 8,400.68 | 124.90   | PREMIUM     |
| 72W             | 67.26          | 5000K | 8,652.70 | 128.65   | PREMIUM     |

## PRODUCT DIMENSIONS

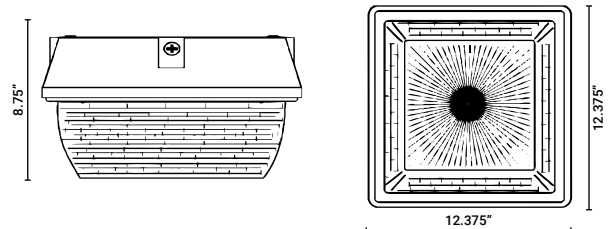

## POWER

POWER FACTOR >0.90 - THD <20

# CV304

LED CANOPY LUMINAIRE



AVAILABLE IN QUICK SHIP



## COMPACT, HEAVY-DUTY HOUSING

The CV304 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The CV304 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

## 120-277V STANDARD TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Building Canopy      Storage Facilities  
Parking Garages      Gas Stations  
Tunnels

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # CV304 - 24W - 35K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|----------------------|--------------------------------------------------|
| CV304 |         |                           |                      |                                                  |
|       | 24W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 36W     | 30K 3000K - WARM WHITE    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 48W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | MS MOTION SENSOR                                 |
|       | 60W     | 40K 4000K - NEUTRAL WHITE | SL SILVER            | D1 0-10V DIMMING                                 |
|       | 72W     | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      | D2 STEP DIMMING (120V ONLY)                      |
|       |         | 55K 5500K - DAYLIGHT      |                      | EM EMERGENCY BATTERY PACK                        |
|       |         |                           |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       |         |                           |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 24W             | 23.54          | 3000K | 2,875.45 | 122.15   | PREMIUM     |
| 24W             | 23.54          | 4000K | 2,961.71 | 125.82   | PREMIUM     |
| 24W             | 23.54          | 5000K | 3,050.57 | 129.59   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,186.14 | 122.15   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,311.72 | 125.82   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,441.07 | 129.59   | PREMIUM     |
| 48W             | 46.60          | 3000K | 5,692.27 | 122.15   | PREMIUM     |
| 48W             | 46.60          | 4000K | 5,863.04 | 125.82   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,038.93 | 129.59   | PREMIUM     |
| 60W             | 56.83          | 3000K | 6,941.88 | 122.15   | PREMIUM     |
| 60W             | 56.83          | 4000K | 7,150.14 | 125.82   | PREMIUM     |
| 60W             | 56.83          | 5000K | 7,364.64 | 129.59   | PREMIUM     |
| 72W             | 67.26          | 3000K | 8,215.92 | 122.15   | PREMIUM     |
| 72W             | 67.26          | 4000K | 8,462.40 | 125.82   | PREMIUM     |
| 72W             | 67.26          | 5000K | 8,716.27 | 129.59   | PREMIUM     |

## PRODUCT DIMENSIONS

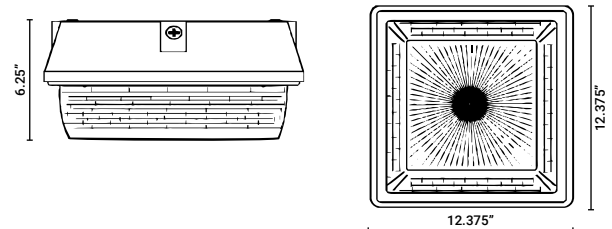

## POWER

POWER FACTOR >0.90 - THD <20

# CV15G

LED CANOPY LUMINAIRE



AVAILABLE IN QUICK SHIP



## COMPACT, HEAVY-DUTY HOUSING

The CV15G is a 15" Circular Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The CV15G can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

## 120-277V STANDARD

## TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Building Canopy      Storage Facilities  
Parking Garages      Gas Stations  
Tunnels

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # CV15G - 12W - 35K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|----------------------|--------------------------------------------------|
| CV15G |         |                           |                      |                                                  |
|       | 12W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 24W     | 30K 3000K - WARM WHITE    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 36W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | MS MOTION SENSOR                                 |
|       | 48W     | 40K 4000K - NEUTRAL WHITE | SL SILVER            | D1 0-10V DIMMING                                 |
|       | 60W     | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      | D2 STEP DIMMING (120V ONLY)                      |
|       | 72W     | 55K 5500K - DAYLIGHT      |                      | EM EMERGENCY BATTERY PACK                        |
|       | 84W     |                           |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       | 96W     |                           |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY |
|-----------------|----------------|-------|----------|----------|
| 12W             | 12.65          | 3000K | 1362.50  | 107.71   |
| 12W             | 12.65          | 4000K | 1403.38  | 110.94   |
| 12W             | 12.65          | 5000K | 1445.48  | 114.27   |
| 24W             | 23.54          | 3000K | 2725.00  | 115.76   |
| 24W             | 23.54          | 4000K | 2806.75  | 119.23   |
| 24W             | 23.54          | 5000K | 2890.95  | 122.81   |
| 36W             | 34.27          | 3000K | 4097.74  | 119.57   |
| 36W             | 34.27          | 4000K | 4220.68  | 123.16   |
| 36W             | 34.27          | 5000K | 4347.30  | 126.85   |
| 48W             | 46.6           | 3000K | 5450.00  | 116.95   |
| 48W             | 46.6           | 4000K | 5613.50  | 120.46   |
| 48W             | 46.6           | 5000K | 5781.91  | 124.08   |
| 60W             | 56.83          | 3000K | 6812.50  | 119.88   |
| 60W             | 56.83          | 4000K | 7016.88  | 123.47   |
| 60W             | 56.83          | 5000K | 7227.38  | 127.18   |
| 72W             | 67.26          | 3000K | 8175.00  | 121.54   |
| 72W             | 67.26          | 4000K | 8420.25  | 125.19   |
| 72W             | 67.26          | 5000K | 8672.86  | 128.95   |
| 84W             | 81.55          | 3000K | 9537.50  | 116.95   |
| 84W             | 81.55          | 4000K | 9823.63  | 120.46   |
| 84W             | 81.55          | 5000K | 10118.33 | 124.08   |
| 96W             | 92.21          | 3000K | 10900.00 | 118.21   |
| 96W             | 92.21          | 4000K | 11227.00 | 121.75   |
| 96W             | 92.21          | 5000K | 11563.81 | 125.41   |

## PRODUCT DIMENSIONS

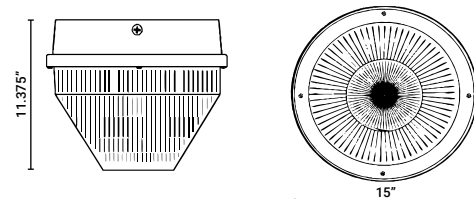

## POWER

POWER FACTOR >0.90 - THD <20

## ZCL

FLEXIBLE LED CANOPY &amp; GARAGE LUMINAIRE

**HEAVY-DUTY, IP-66 RATED HOUSING**

The ZCL is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

**FLEXIBLE LIGHT OUTPUT CONFIGURATIONS**

Extensive offering of Wattage, Optics and CCT options allow the ZCL to meet a wide-range of project requirements

**EASY TO INSTALL MOUNTING HARDWARE**

The ZCL comes standard with a Removable Bracket engineered to be installed within a variety of Surface Mounting Applications

**120-277V STANDARD****PRODUCT APPLICATIONS**

|                 |                    |
|-----------------|--------------------|
| Building Canopy | Gas Stations       |
| Parking Garages | Catwalks           |
| Tunnels         | Storage Facilities |
| Bridges         | Concourses         |

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

**ORDERING GUIDE**

Sample Part # ZCL - 100W - 40K - BZ - PC1 - D1


| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | OPTICS                        | HOUSING COLOR        | OPTIONS & ACCESSORIES                  |
|-------|---------|---------------------------|-------------------------------|----------------------|----------------------------------------|
| ZCL   |         |                           |                               |                      |                                        |
|       | 60W     | 30K 3000K - WARM WHITE    | T1 TYPE I                     | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                     |
|       | 100W    | 40K 4000K - NEUTRAL WHITE | T2 TYPE II                    | WH WHITE             | PC2 208/277V PHOTOCELL                 |
|       | 120W    | 50K 5000K - COOL WHITE    | T3 TYPE III                   | BL BLACK             | MS MOTION SENSOR                       |
|       | 150W    | 57K 5700K - DAYLIGHT      | T4 TYPE IV                    | SL SILVER            | D1 0-10V DIMMING                       |
|       | 200W    |                           | 20D TYPE V - 20° BEAM ANGLE   |                      | D2 STEP DIMMING                        |
|       | 250W    |                           | 40D TYPE V - 40° BEAM ANGLE   |                      | NC1 NETWORK CONTROLS FOR ZIGBEE        |
|       | 300W    |                           | 80D TYPE V - 80° BEAM ANGLE   |                      | HS HOUSE-SIDE SHIELD                   |
|       |         |                           | 170D TYPE V - 170° BEAM ANGLE |                      | WG PROTECTIVE WIRE GUARD               |
|       |         |                           |                               |                      | EM EMERGENCY DRIVER                    |
|       |         |                           |                               |                      | V1* 480/347V INPUT (120-277V STANDARD) |

\*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

**PRODUCT SPECIFICATIONS**

| WATTAGE | DELIVERED LUMENS | EFFICACY | MODULES | X: WIDTH |
|---------|------------------|----------|---------|----------|
| 60W     | 7,380 LM         | 123 LM/W | 2       | 10.7"    |
| 100W    | 12,300 LM        | 123 LM/W | 3       | 13.5"    |
| 120W    | 14,760 LM        | 123 LM/W | 4       | 16.3"    |
| 150W    | 28,450 LM        | 123 LM/W | 5       | 19.1"    |
| 200W    | 24,600 LM        | 123 LM/W | 6       | 21.9"    |
| 250W    | 30,750 LM        | 123 LM/W | 7       | 24.7"    |
| 300W    | 36,900 LM        | 123 LM/W | 8       | 27.5"    |

**Notes**  
Specifications Determined at 5000K and 80° Beam Angle

**PRODUCT DIMENSIONS**

# *INTRODUCING THE ALL-NEW* **CL390**



An efficient **LED canopy luminaire** perfect for

Parking Garages | Walkways | Tunnels  
Stairwells | Catwalks | & More!



## **// FLOODLIGHT**

# FL290

BULLET LED FLOODLIGHT LUMINAIRE



28 WATT VERSION

## HEAVY-DUTY, IP-65 RATED HOUSING

Die Cast Aluminum Housing with Durable, Dark Bronze Powder Coat Finish, and Polycarbonate Lens

## WET LOCATION RATED

Engineered and Constructed for Exterior Environments

## MULTIPLE MOUNTING OPTIONS

Multiple Mounting Options make the FL290 a Versatile Luminaire for Small Scale Flood Lighting Applications

## 120-277V STANDARD

## PRODUCT APPLICATIONS

Building Entrances      Flag Poles  
Walkways                      Signage  
Landscape                     Security

## ORDERING GUIDE


Sample Part # FL290 - 28W - 30D - 50K - BZ - KM

| MODEL | WATTAGE | OPTICS                | COLOR TEMPERATURE (CCT) | HOUSING COLOR        | MOUNTING                                             |
|-------|---------|-----------------------|-------------------------|----------------------|------------------------------------------------------|
| FL290 |         |                       |                         | BZ                   |                                                      |
|       | 15W     | 30D NARROW (30°) BEAM | 30K 3000K - WARM WHITE  | BZ BRONZE (STANDARD) | KM KNUCKLE MOUNT (STANDARD)<br>NPS 1/2" THREADED-END |
|       | 28W     |                       | 50K 5000K - COOL WHITE  |                      | SM SPIKE MOUNT                                       |
|       | 42W     | 60D MEDIUM (60°) BEAM |                         |                      | CM CANOPY MOUNT                                      |


## PRODUCT SPECIFICATIONS

| WATTAGE | CCT   | DELIVERED LUMENS | EFFICACY | CRI |
|---------|-------|------------------|----------|-----|
| 15W     | 3000K | 1,536 LM         | 107 LM/W | >80 |
| 15W     | 5000K | 1,700 LM         | 113 LM/W | >80 |
| 28W     | 3000K | 2,723 LM         | 106 LM/W | >80 |
| 28W     | 5000K | 3,200 LM         | 114 LM/W | >80 |
| 42W     | 3000K | 4,204 LM         | 107 LM/W | >80 |
| 42W     | 5000K | 4,800 LM         | 114 LM/W | >80 |


### 15W PRODUCT DIMENSIONS



### 28W PRODUCT DIMENSIONS



### 42W PRODUCT DIMENSIONS



# FL390

COMPACT LED FLOODLIGHT LUMINAIRE



30 WATT VERSION

## HEAVY-DUTY, IP-65 RATED HOUSING

Die Cast Aluminum Housing with Durable, Dark Bronze Powder Coat Finish, and a Heat-Resistant Polycarbonate Lens

## WET LOCATION RATED

Engineered and Constructed for Exterior Environments

## MULTIPLE MOUNTING OPTIONS

Multiple Mounting Options make the FL390 a Versatile Luminaire for Small Scale Flood Lighting Applications

## 120-277V STANDARD

## PRODUCT APPLICATIONS

Building Entrances      Flag Poles  
Walkways                      Signage

## ORDERING GUIDE


Sample Part # FL390 - 30W - 50K - T5 - YM - BZ - FS

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | OPTICS    | MOUNTING                                  | HOUSING COLOR        | OPTIONS & ACCESSORIES |
|-------|---------|---------------------------|-----------|-------------------------------------------|----------------------|-----------------------|
| FL390 |         |                           |           |                                           |                      |                       |
|       | 15W     | 30K 3000K - WARM WHITE    | T5 TYPE V | YM YOKE MOUNT (STANDARD)                  | BZ BRONZE (STANDARD) | WG WIRE GUARD         |
|       | 30W     | 40K 4100K - NEUTRAL WHITE |           | KM KNUCKLE MOUNT<br>NPS 1/2" THREADED-END |                      | FS FULL GLARE SHIELD  |
|       | 50W     | 50K 5000K - COOL WHITE    |           |                                           |                      | HS HALF GLARE SHIELD  |


## PRODUCT SPECIFICATIONS

| WATTAGE | CCT   | DELIVERED LUMENS | EFFICACY | CRI |
|---------|-------|------------------|----------|-----|
| 15W     | 3000K | 1,570 LM         | 103 LM/W | >80 |
| 15W     | 4000K | 1,615 LM         | 111 LM/W | >80 |
| 15W     | 5000K | 1,667 LM         | 111 LM/W | >80 |
| 30W     | 3000K | 3,453 LM         | 117 LM/W | >80 |
| 30W     | 4000K | 3,586 LM         | 121 LM/W | >80 |
| 30W     | 5000K | 3,718 LM         | 126 LM/W | >80 |
| 50W     | 3000K | 5,882 LM         | 119 LM/W | >80 |
| 50W     | 4000K | 6,031 LM         | 123 LM/W | >80 |
| 50W     | 5000K | 6,179 LM         | 126 LM/W | >80 |


### 15W PRODUCT DIMENSIONS



### 30W PRODUCT DIMENSIONS



### 50W PRODUCT DIMENSIONS

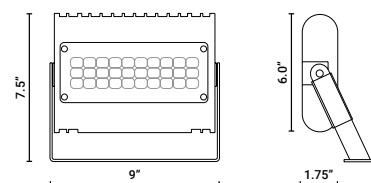

# FL490

LARGE LED FLOODLIGHT LUMINAIRE



## HEAVY-DUTY, IP-65 RATED HOUSING

Die Cast Aluminum Housing with a Durable, Dark Bronze Powder Coat Finish, and a Heat-Resistant Polycarbonate Lens

## WET LOCATION RATED

Engineered and Constructed for Exterior Environments

## MULTIPLE MOUNTING OPTIONS

Adjustable Trunnion Mount makes the FL490 a Versatile Luminaire for Medium & Large Scale Flood Lighting Applications

## 120-277V STANDARD & 0-10V DIMMING STANDARD

## PRODUCT APPLICATIONS

|              |                             |
|--------------|-----------------------------|
| Parking Lots | Playgrounds                 |
| Walkways     | Parks & Recreational Fields |
| Buildings    | Loading Docks               |
| Signage      |                             |

## ORDERING GUIDE


Sample Part # FL490 - 150W - 40K - T5 - SA - BZ - PC2

| MODEL | WATTAGE*                            | COLOR TEMPERATURE (CCT)                             | OPTICS                          | MOUNTING          | HOUSING COLOR        | OPTIONS & ACCESSORIES                                                                                                     |
|-------|-------------------------------------|-----------------------------------------------------|---------------------------------|-------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------|
| FL490 | 80W<br>100W<br>150W<br>220W<br>300W | 40K 4100K - NEUTRAL WHITE<br>50K 5000K - COOL WHITE | T3 TYPE III<br>T5 TYPE V (STAN) | TR TRUNNION MOUNT | BZ BRONZE (STANDARD) | WG WIRE GUARD<br>FS FULL GLARE SHIELD<br>HS HALF GLARE SHIELD<br>PC2 208/277V PHOTOCELL<br>PC3 120V PENCIL TYPE PHOTOCELL |


\*0-10V DIMMING STANDARD ON ALL WATTAGE OPTIONS EXCEPT 80W

## PRODUCT SPECIFICATIONS

### 80W - 100W - 150W PRODUCT DIMENSIONS

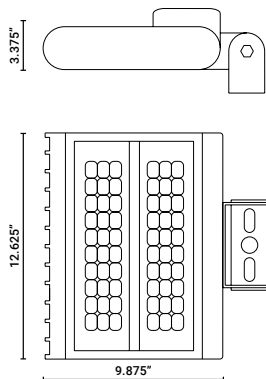

### 230W - 300W PRODUCT DIMENSIONS

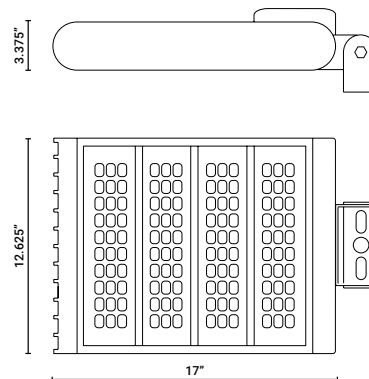

# DC531

LED FLOODLIGHT LUMINAIRE



AVAILABLE IN QUICK SHIP



## COMPACT, HEAVY-DUTY HOUSING

The DC531 is a Small Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC531 comes standard with an Integral 1/2" Male Threaded Mount with an Optional Post Top Fitter available

## 120-277V STANDARD

## TYPE II DISTRIBUTION

## PRODUCT APPLICATIONS

Parking Lots  
Walkways  
Buildings  
Signage  
Playgrounds  
Parks & Recreational Fields  
Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DC531 - 12W - 35K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|----------------------|--------------------------------------------------|
| DC531 |         |                           |                      |                                                  |
|       | 12W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 24W     | 30K 3000K - WARM WHITE    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 36W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | MS MOTION SENSOR (12W & 24W ONLY)                |
|       |         | 40K 4000K - NEUTRAL WHITE | SL SILVER            | D1 0-10V DIMMING                                 |
|       |         | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      | D2 STEP DIMMING (120V ONLY)                      |
|       |         | 55K 5500K - DAYLIGHT      |                      | PT POST TOP FITTER                               |
|       |         |                           |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       |         |                           |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 12W             | 12.39          | 3000K | 1,333.00 | 107.59   | PREMIUM     |
| 12W             | 12.72          | 4000K | 1,399.65 | 110.04   | PREMIUM     |
| 12W             | 12.72          | 5000K | 1,469.63 | 115.54   | PREMIUM     |
| 24W             | 23.68          | 3000K | 2,666.00 | 112.58   | PREMIUM     |
| 24W             | 23.68          | 4000K | 2,799.30 | 118.21   | PREMIUM     |
| 24W             | 23.68          | 5000K | 2,939.26 | 124.12   | PREMIUM     |
| 36W             | 34.27          | 3000K | 3,999.00 | 116.69   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,198.95 | 122.53   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,408.90 | 128.65   | PREMIUM     |

## PRODUCT DIMENSIONS

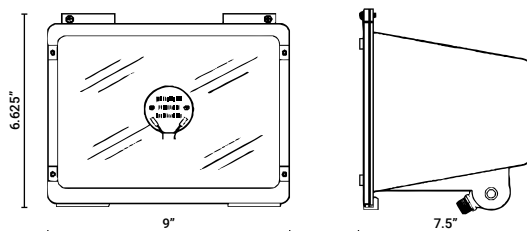

## POWER

POWER FACTOR >0.90 - THD <20

# DC545

LED FLOODLIGHT LUMINAIRE



AVAILABLE IN QUICK SHIP



## COMPACT, HEAVY-DUTY HOUSING

The DC545 is a 9" Square Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC545 comes standard with an Integral 1/2" Male Threaded Mount with an Optional Post Top Fitter available

## 120-277V STANDARD

## TYPE V DISTRIBUTION

## PRODUCT APPLICATIONS

Parking Lots  
Walkways  
Buildings  
Signage  
Playgrounds  
Parks & Recreational Fields  
Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DC545 - 12W - 35K - BZ - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES                 |
|-------|---------|---------------------------|----------------------|---------------------------------------|
| DC545 |         |                           |                      |                                       |
|       | 12W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | D1 0-10V DIMMING                      |
|       | 24W     | 30K 3000K - WARM WHITE    | WH WHITE             | D2 STEP DIMMING (120V ONLY)           |
|       | 36W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | PT POST TOP FITTER                    |
|       | 48W     | 40K 4000K - NEUTRAL WHITE | SL SILVER            | V1 480/347V INPUT (120-277V STANDARD) |
|       |         | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      |                                       |
|       |         | 55K 5500K - DAYLIGHT      |                      |                                       |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 12W             | 12.72          | 3000K | 1,408.25 | 110.71   | PREMIUM     |
| 12W             | 12.72          | 4000K | 1,478.66 | 116.25   | PREMIUM     |
| 12W             | 12.72          | 5000K | 1,552.60 | 122.06   | PREMIUM     |
| 24W             | 23.68          | 3000K | 2,816.50 | 118.94   | PREMIUM     |
| 24W             | 23.68          | 4000K | 2,957.32 | 124.89   | PREMIUM     |
| 24W             | 23.68          | 5000K | 3,105.19 | 131.13   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,224.75 | 123.28   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,435.99 | 129.44   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,657.79 | 135.91   | PREMIUM     |
| 48W             | 45.70          | 3000K | 5,633.00 | 123.26   | PREMIUM     |
| 48W             | 46.60          | 4000K | 5,914.65 | 126.92   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,210.38 | 133.27   | PREMIUM     |

## PRODUCT DIMENSIONS

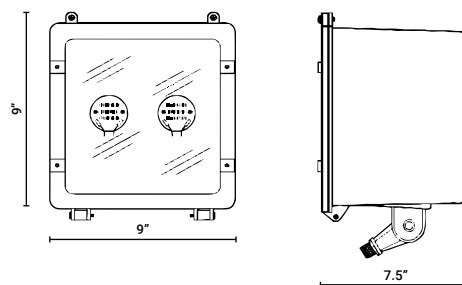

## POWER

POWER FACTOR >0.90 - THD <20

# DC400

LED FLOODLIGHT LUMINAIRE



AVAILABLE IN QUICK SHIP



## COMPACT, HEAVY-DUTY HOUSING

The DC400 is a 16"x 10" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## VERSATILE MOUNTING OPTIONS

The DC400 is available with Three Mounting Options: Trunnion, Slip-Fitter and Straight Arm

## 120-277V STANDARD

## TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Parking Lots

Walkways

Buildings

Signage

Playgrounds

Parks & Recreational Fields

Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DC400 - 12W - 35K - BZ - SF - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | MOUNTING            | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|----------------------|---------------------|--------------------------------------------------|
| DC400 |         |                           |                      |                     |                                                  |
|       | 12W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | NA NONE (BY OTHERS) | PC1 120V PHOTOCELL                               |
|       | 24W     | 30K 3000K - WARM WHITE    | WH WHITE             | TR TRUNNION MOUNT   | PC2 208/277V PHOTOCELL                           |
|       | 36W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | SF SLIP-FITTER      | MS MOTION SENSOR                                 |
|       | 48W     | 40K 4000K - NEUTRAL WHITE | SL SILVER            | ST STRAIGHT ARM     | D1 0-10V DIMMING                                 |
|       | 60W     | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      |                     | D2 STEP DIMMING (120V ONLY)                      |
|       | 72W     | 55K 5500K - DAYLIGHT      |                      |                     | EM EMERGENCY BATTERY PACK                        |
|       | 84W     |                           |                      |                     | V1* 480/347V INPUT (120-277V STANDARD)           |
|       | 96W     |                           |                      |                     | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS    | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|-----------|----------|-------------|
| 12W             | 12.40          | 3000K | 1,333.00  | 107.59   | PREMIUM     |
| 12W             | 12.72          | 4000K | 1,399.65  | 110.04   | PREMIUM     |
| 12W             | 12.72          | 5000K | 1,469.63  | 115.54   | PREMIUM     |
| 24W             | 23.68          | 3000K | 2,636.25  | 111.33   | PREMIUM     |
| 24W             | 23.68          | 4000K | 2,768.06  | 116.89   | PREMIUM     |
| 24W             | 23.68          | 5000K | 2,906.47  | 122.74   | PREMIUM     |
| 36W             | 34.27          | 3000K | 3,954.38  | 115.39   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,152.09  | 121.16   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,359.70  | 127.22   | PREMIUM     |
| 48W             | 46.60          | 3000K | 5,633.00  | 120.88   | PREMIUM     |
| 48W             | 46.60          | 4000K | 5,914.65  | 126.92   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,210.38  | 133.27   | PREMIUM     |
| 60W             | 56.83          | 3000K | 6,823.00  | 120.06   | PREMIUM     |
| 60W             | 56.83          | 4000K | 7,164.15  | 126.06   | PREMIUM     |
| 60W             | 56.83          | 5000K | 7,522.36  | 132.37   | PREMIUM     |
| 72W             | 67.65          | 3000K | 8,122.05  | 120.06   | PREMIUM     |
| 72W             | 67.65          | 4000K | 8,528.15  | 126.06   | STANDARD    |
| 72W             | 67.65          | 5000K | 8,954.56  | 132.37   | STANDARD    |
| 84W             | 80.26          | 3000K | 9,636.00  | 120.06   | STANDARD    |
| 84W             | 81.55          | 4000K | 10,117.80 | 124.07   | STANDARD    |
| 84W             | 81.55          | 5000K | 10,623.70 | 130.27   | STANDARD    |
| 96W             | 92.50          | 3000K | 10,545.00 | 114.00   | STANDARD    |
| 96W             | 91.65          | 4000K | 11,310.00 | 123.40   | STANDARD    |
| 96W             | 91.65          | 5000K | 11,625.90 | 126.85   | STANDARD    |

## PRODUCT DIMENSIONS

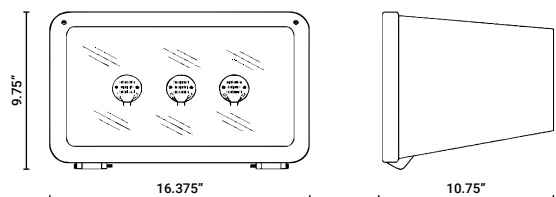

## POWER

POWER FACTOR >0.90 - THD <20

# DC560

LED FLOODLIGHT LUMINAIRE



AVAILABLE IN QUICK SHIP



## COMPACT, HEAVY-DUTY HOUSING

The DC560 is a 12"x 8" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC560 comes standard with an Integral 1/2" Female Threaded Mount

## 120-277V STANDARD

## TYPE III DISTRIBUTION

## PRODUCT APPLICATIONS

Parking Lots

Walkways

Buildings

Signage

Playgrounds

Parks & Recreational Fields

Loading Docks

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DC560 - 12W - 35K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|----------------------|--------------------------------------------------|
| DC560 | 12W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 24W     | 30K 3000K - WARM WHITE    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 36W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | MS MOTION SENSOR                                 |
|       | 48W     | 40K 4000K - NEUTRAL WHITE | SL SILVER            | D1 0-10V DIMMING                                 |
|       |         | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      | D2 STEP DIMMING (120V ONLY)                      |
|       |         | 55K 5500K - DAYLIGHT      |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       |         |                           |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 12W             | 12.73          | 3000K | 1,487.00 | 116.81   | PREMIUM     |
| 12W             | 12.72          | 4000K | 1,561.35 | 122.75   | PREMIUM     |
| 12W             | 12.72          | 5000K | 1,639.42 | 128.89   | PREMIUM     |
| 24W             | 23.68          | 3000K | 2,974.00 | 125.59   | PREMIUM     |
| 24W             | 23.68          | 4000K | 3,122.70 | 131.87   | PREMIUM     |
| 24W             | 23.68          | 5000K | 3,278.83 | 138.46   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,461.00 | 130.17   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,684.05 | 136.68   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,918.25 | 143.51   | PREMIUM     |
| 48W             | 46.60          | 3000K | 5,948.00 | 127.64   | PREMIUM     |
| 48W             | 46.60          | 4000K | 6,245.40 | 134.02   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,557.67 | 140.72   | PREMIUM     |

## PRODUCT DIMENSIONS

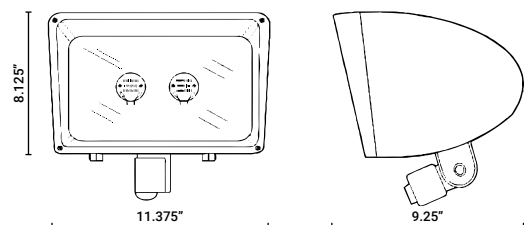

## POWER

POWER FACTOR >0.90 - THD <20

# DC570

LED FLOODLIGHT LUMINAIRE



AVAILABLE IN QUICK SHIP



## COMPACT, HEAVY-DUTY HOUSING

The DC570 is a 16" Square Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## VERSATILE MOUNTING OPTIONS

The DC570 is available with Three Mounting Options: Trunnion, Slip-Fitter and Straight Arm

**120-277V STANDARD**      **TYPE V DISTRIBUTION**

## PRODUCT APPLICATIONS

|              |                             |
|--------------|-----------------------------|
| Parking Lots | Playgrounds                 |
| Walkways     | Parks & Recreational Fields |
| Buildings    | Loading Docks               |
| Signage      |                             |

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## ORDERING GUIDE


Sample Part # DC570 - 12W - 35K - BZ - TR - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR        | MOUNTING            | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|----------------------|---------------------|--------------------------------------------------|
| DC570 |         |                           |                      |                     |                                                  |
|       | 12W     | 27K 2700K - WARM WHITE    | BZ BRONZE (STANDARD) | NA NONE (BY OTHERS) | PC1 120V PHOTOCELL                               |
|       | 24W     | 30K 3000K - WARM WHITE    | WH WHITE             | TR TRUNNION MOUNT   | PC2 208/277V PHOTOCELL                           |
|       | 36W     | 35K 3500K - NEUTRAL WHITE | BL BLACK             | SF SLIP-FITTER      | MS MOTION SENSOR                                 |
|       | 48W     | 40K 4000K - NEUTRAL WHITE | SL SILVER            | ST STRAIGHT ARM     | D1 0-10V DIMMING                                 |
|       | 60W     | 50K 5000K - COOL WHITE    | CC CUSTOM COLOR      |                     | D2 STEP DIMMING (120V ONLY)                      |
|       | 72W     | 55K 5500K - DAYLIGHT      |                      |                     | EM EMERGENCY BATTERY PACK                        |
|       | 84W     |                           |                      |                     | V1* 480/347V INPUT (120-277V STANDARD)           |
|       | 96W     |                           |                      |                     | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS    | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|-----------|----------|-------------|
| 12W             | 12.72          | 3000K | 1,391.25  | 109.38   | PREMIUM     |
| 12W             | 12.72          | 4000K | 1,460.81  | 114.84   | PREMIUM     |
| 12W             | 12.72          | 5000K | 1,533.85  | 120.59   | PREMIUM     |
| 24W             | 23.68          | 3000K | 2,782.50  | 117.50   | PREMIUM     |
| 24W             | 23.68          | 4000K | 2,921.62  | 123.38   | PREMIUM     |
| 24W             | 23.68          | 5000K | 3,067.71  | 129.55   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,173.75  | 121.79   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,382.44  | 127.88   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,601.56  | 134.27   | PREMIUM     |
| 48W             | 46.60          | 3000K | 5,633.00  | 120.88   | PREMIUM     |
| 48W             | 46.60          | 4000K | 5,914.65  | 126.92   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,210.38  | 133.27   | PREMIUM     |
| 60W             | 56.83          | 3000K | 6,956.25  | 122.40   | STANDARD    |
| 60W             | 56.83          | 4000K | 7,304.06  | 128.52   | STANDARD    |
| 60W             | 56.83          | 5000K | 7,669.27  | 134.95   | STANDARD    |
| 72W             | 67.65          | 3000K | 8,347.50  | 123.39   | STANDARD    |
| 72W             | 67.65          | 4000K | 8,764.88  | 129.56   | STANDARD    |
| 72W             | 67.65          | 5000K | 9,203.12  | 136.04   | STANDARD    |
| 84W             | 81.55          | 3000K | 9,738.75  | 119.42   | STANDARD    |
| 84W             | 81.55          | 4000K | 10,225.70 | 125.39   | STANDARD    |
| 84W             | 81.55          | 5000K | 10,737.00 | 131.66   | STANDARD    |
| 96W             | 91.40          | 3000K | 11,130.00 | 121.77   | STANDARD    |
| 96W             | 91.65          | 4000K | 11,686.50 | 127.51   | STANDARD    |
| 96W             | 91.65          | 5000K | 12,270.80 | 133.89   | STANDARD    |

## PRODUCT DIMENSIONS

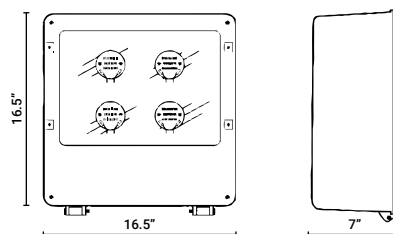

## POWER

POWER FACTOR >0.90 - THD <20

# ZFL-28

COMPACT LED FLOODLIGHT LUMINAIRE



## HEAVY-DUTY, IP-66 RATED HOUSING

The ZFL-28 is constructed with a Die Cast Aluminum Body and Heat and Impact Resistant Glass to create a Heavy-Duty Housing

## WET LOCATION RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING HARDWARE

The ZFL-28 comes standard with a 160° Swivel Bracket engineered to be installed within a variety of Exterior Applications

## 120-277V STANDARD

## PRODUCT APPLICATIONS

|                    |                  |
|--------------------|------------------|
| Building Entrances | Bridges          |
| Walkways           | Catwalks         |
| Tunnels            | Stairwells       |
| Loading Docks      | Building Facades |
| Canopies           |                  |

## ORDERING GUIDE


Sample Part # ZFL - 28W - 50K - SL - WB

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT) | HOUSING COLOR | OPTICS             |
|-------|---------|-------------------------|---------------|--------------------|
| ZFL   | 28W     | 50K                     | SL            |                    |
|       | 28W     | 50K 5000K - COOL WHITE  | SL SILVER     | WB WIDE (80°) BEAM |

## PRODUCT SPECIFICATIONS

| WATTAGE | DELIVERED LUMENS | EFFICACY | CRI |
|---------|------------------|----------|-----|
| 28W     | 3,655 LM         | 135 LM/W | >70 |

## 28W PRODUCT DIMENSIONS

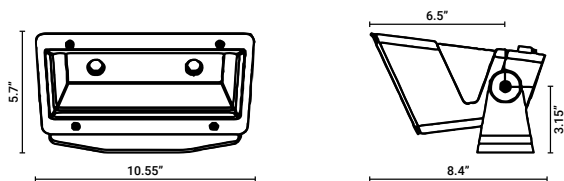

## ZFL

FLEXIBLE LED FLOODLIGHT LUMINAIRE



### HEAVY-DUTY, IP-66 RATED HOUSING

The ZFL is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

### FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZFL to meet a wide-range of project requirements

### EASY TO INSTALL MOUNTING HARDWARE

The ZFL comes standard with a Yoke Mount Bracket engineered to be installed within a variety of Area & Flood Applications

### 120-277V STANDARD

### PRODUCT APPLICATIONS

|              |                             |
|--------------|-----------------------------|
| Parking Lots | Playgrounds                 |
| Walkways     | Parks & Recreational Fields |
| Buildings    | Loading Docks               |
| Signage      | Flagpoles                   |

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

### ORDERING GUIDE

Sample Part # ZFL - 100W - 40K - BZ - PC1 - D1


| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | OPTICS                        | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|-------------------------------|----------------------|--------------------------------------------------|
| ZFL   |         |                           |                               |                      |                                                  |
|       | 60W     | 30K 3000K - WARM WHITE    | T1 TYPE I                     | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 100W    | 40K 4000K - NEUTRAL WHITE | T2 TYPE II                    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 120W    | 50K 5000K - COOL WHITE    | T3 TYPE III                   | BL BLACK             | MS MOTION SENSOR                                 |
|       | 150W    | 57K 5700K - DAYLIGHT      | T4 TYPE IV                    | SL SILVER            | D1 0-10V DIMMING                                 |
|       | 200W    |                           | 20D TYPE V - 20° BEAM ANGLE   |                      | D2 STEP DIMMING                                  |
|       | 250W    |                           | 40D TYPE V - 40° BEAM ANGLE   |                      | NC1 NETWORK CONTROLS FOR ZIGBEE                  |
|       | 300W    |                           | 80D TYPE V - 80° BEAM ANGLE   |                      | HS HOUSE-SIDE SHIELD                             |
|       |         |                           | 170D TYPE V - 170° BEAM ANGLE |                      | WG PROTECTIVE WIRE GUARD                         |
|       |         |                           |                               |                      | EM EMERGENCY DRIVER                              |
|       |         |                           |                               |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       |         |                           |                               |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

### PRODUCT SPECIFICATIONS

| WATTAGE | DELIVERED LUMENS | EFFICACY | MODULES | X: WIDTH |
|---------|------------------|----------|---------|----------|
| 60W     | 7,380 LM         | 123 LM/W | 2       | 10.7"    |
| 100W    | 12,300 LM        | 123 LM/W | 3       | 13.5"    |
| 120W    | 14,760 LM        | 123 LM/W | 4       | 16.3"    |
| 150W    | 28,450 LM        | 123 LM/W | 5       | 19.1"    |
| 200W    | 24,600 LM        | 123 LM/W | 6       | 21.9"    |
| 250W    | 30,750 LM        | 123 LM/W | 7       | 24.7"    |
| 300W    | 36,900 LM        | 123 LM/W | 8       | 27.5"    |

Notes  
Specifications Determined at 5000K and 80° Beam Angle

### PRODUCT DIMENSIONS

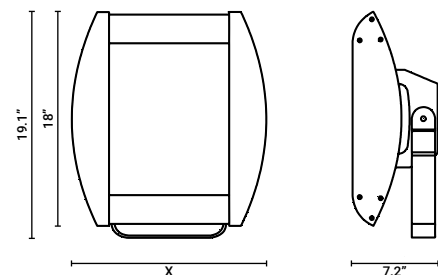

# EXPERIENCE THE POWER OF THE **FL390**



Up to **50 WATTS** for complete illumination

Parking Lots | Walkways | Buildings

Signage | Parks | & More!



## **// AREA & POST TOP**

# AL490

LED AREA & POST TOP LUMINAIRE



150 WATT VERSION - SLIP FITTER MOUNT

## HEAVY-DUTY, IP-65 RATED HOUSING

Die Cast Aluminum Housing with a Durable, Dark Bronze Powder Coat Finish, and a Heat-Resistant Polycarbonate Lens

## WET LOCATION RATED

Engineered and Constructed for Exterior Environments

## MULTIPLE MOUNTING OPTIONS

Multiple Mounting Options make the AL490 a Versatile Luminaire for Medium & Large Scale Lighting Applications

## 120-277V STANDARD & 0-10V DIMMING STANDARD

## PRODUCT APPLICATIONS

|              |                             |
|--------------|-----------------------------|
| Parking Lots | Playgrounds                 |
| Walkways     | Parks & Recreational Fields |
| Buildings    | Loading Docks               |
| Signage      |                             |

## ORDERING GUIDE


Sample Part # AL490 - 150W - 40K - T5 - SA - BZ - PC2

| MODEL | WATTAGE* | COLOR TEMPERATURE (CCT)   | OPTICS           | MOUNTING                         | HOUSING COLOR        | OPTIONS & ACCESSORIES          |
|-------|----------|---------------------------|------------------|----------------------------------|----------------------|--------------------------------|
| AL490 | 80W      | 40K 4100K - NEUTRAL WHITE | T3 TYPE III      | SF SLIP-FITTER MOUNT             | BZ BRONZE (STANDARD) | WG WIRE GUARD                  |
|       | 100W     | 50K 5000K - COOL WHITE    | T5 TYPE V (STAN) | SA STRAIGHT-ARM MOUNT (STANDARD) |                      | FS FULL GLARE SHIELD           |
|       | 150W     |                           |                  |                                  |                      | HS HALF GLARE SHIELD           |
|       | 220W     |                           |                  |                                  |                      | PC2 208/277V PHOTOCELL         |
|       | 300W     |                           |                  |                                  |                      | PC3 120V PENCIL TYPE PHOTOCELL |


\*0-10V DIMMING STANDARD ON ALL WATTAGE OPTIONS EXCEPT 80W

## PRODUCT SPECIFICATIONS

### 80W - 100W - 150W PRODUCT DIMENSIONS

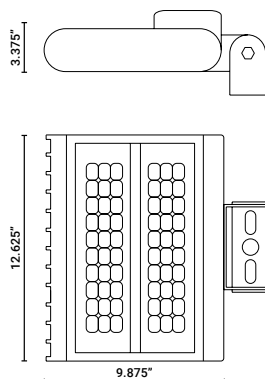

### 230W - 300W PRODUCT DIMENSIONS

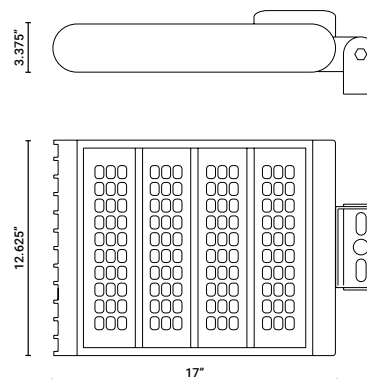

## ZPT

FLEXIBLE LED POST TOP LUMINAIRE

**HEAVY-DUTY, IP-66 RATED HOUSING**

The ZPT is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

**FLEXIBLE LIGHT OUTPUT CONFIGURATIONS**

Extensive offering of Wattage, Optics and CCT options allow the ZPT to meet a wide-range of project requirements

**EASY TO INSTALL MOUNTING HARDWARE**

The ZPT comes standard with a Pole Top Arm engineered to be installed on a 2.375" Diameter Pole

**120-277V STANDARD****PRODUCT APPLICATIONS**

Parking Lots                      Playgrounds  
Walkways                         Parks & Recreational Fields  
Streetscapes  
Plazas

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

**ORDERING GUIDE**


Sample Part # ZPT - 100W - 40K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | OPTICS                        | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|-------------------------------|----------------------|--------------------------------------------------|
| ZPT   |         |                           |                               |                      |                                                  |
|       | 60W     | 30K 3000K - WARM WHITE    | T1 TYPE I                     | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 100W    | 40K 4000K - NEUTRAL WHITE | T2 TYPE II                    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 120W    | 50K 5000K - COOL WHITE    | T3 TYPE III                   | BL BLACK             | MS MOTION SENSOR                                 |
|       | 150W    | 57K 5700K - DAYLIGHT      | T4 TYPE IV                    | SL SILVER            | D1 0-10V DIMMING                                 |
|       | 200W    |                           | 20D TYPE V - 20° BEAM ANGLE   |                      | D2 STEP DIMMING                                  |
|       | 250W    |                           | 40D TYPE V - 40° BEAM ANGLE   |                      | NC1 NETWORK CONTROLS FOR ZIGBEE                  |
|       | 300W    |                           | 80D TYPE V - 80° BEAM ANGLE   |                      | HS HOUSE-SIDE SHIELD                             |
|       |         |                           | 170D TYPE V - 170° BEAM ANGLE |                      | WG PROTECTIVE WIRE GUARD                         |
|       |         |                           |                               |                      | EM EMERGENCY DRIVER                              |
|       |         |                           |                               |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       |         |                           |                               |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

**PRODUCT SPECIFICATIONS**

| WATTAGE | DELIVERED LUMENS | EFFICACY | MODULES | X: WIDTH |
|---------|------------------|----------|---------|----------|
| 60W     | 7,380 LM         | 123 LM/W | 2       | 10.7"    |
| 100W    | 12,300 LM        | 123 LM/W | 3       | 13.5"    |
| 120W    | 14,760 LM        | 123 LM/W | 4       | 16.3"    |
| 150W    | 28,450 LM        | 123 LM/W | 5       | 19.1"    |
| 200W    | 24,600 LM        | 123 LM/W | 6       | 21.9"    |
| 250W    | 30,750 LM        | 123 LM/W | 7       | 24.7"    |
| 300W    | 36,900 LM        | 123 LM/W | 8       | 27.5"    |

Notes  
Specifications Determined at 5000K and 80° Beam Angle

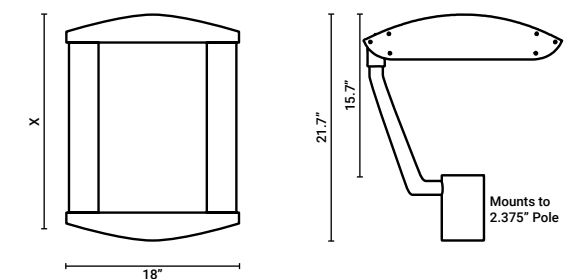**PRODUCT DIMENSIONS**

## ZSL

FLEXIBLE LED POST TOP LUMINAIRE

**HEAVY-DUTY, IP-66 RATED HOUSING**

The ZSL is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

**FLEXIBLE LIGHT OUTPUT CONFIGURATIONS**

Extensive offering of Wattage, Optics and CCT options allow the ZSL to meet a wide-range of project requirements

**EASY TO INSTALL MOUNTING HARDWARE**

The ZSL comes standard with an Integral Slip Fitter engineered to be installed on a 2.375" Diameter Pole

**120-277V STANDARD****PRODUCT APPLICATIONS**

Parking Lots                      Playgrounds  
Walkways                          Parks & Recreational Fields  
Streetscapes  
Plazas

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

**ORDERING GUIDE**


Sample Part # ZSL - 100W - 40K - BZ - PC1 - D1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | OPTICS                        | HOUSING COLOR        | OPTIONS & ACCESSORIES                            |
|-------|---------|---------------------------|-------------------------------|----------------------|--------------------------------------------------|
| ZSL   |         |                           |                               |                      |                                                  |
|       | 60W     | 30K 3000K - WARM WHITE    | T1 TYPE I                     | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL                               |
|       | 100W    | 40K 4000K - NEUTRAL WHITE | T2 TYPE II                    | WH WHITE             | PC2 208/277V PHOTOCELL                           |
|       | 120W    | 50K 5000K - COOL WHITE    | T3 TYPE III                   | BL BLACK             | MS MOTION SENSOR                                 |
|       | 150W    | 57K 5700K - DAYLIGHT      | T4 TYPE IV                    | SL SILVER            | D1 0-10V DIMMING                                 |
|       | 200W    |                           | 20D TYPE V - 20° BEAM ANGLE   |                      | D2 STEP DIMMING                                  |
|       | 250W    |                           | 40D TYPE V - 40° BEAM ANGLE   |                      | NC1 NETWORK CONTROLS FOR ZIGBEE                  |
|       | 300W    |                           | 80D TYPE V - 80° BEAM ANGLE   |                      | HS HOUSE-SIDE SHIELD                             |
|       |         |                           | 170D TYPE V - 170° BEAM ANGLE |                      | WG PROTECTIVE WIRE GUARD                         |
|       |         |                           |                               |                      | EM EMERGENCY DRIVER                              |
|       |         |                           |                               |                      | V1* 480/347V INPUT (120-277V STANDARD)           |
|       |         |                           |                               |                      | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |

**PRODUCT SPECIFICATIONS**

| WATTAGE | DELIVERED LUMENS | EFFICACY | MODULES | X: WIDTH |
|---------|------------------|----------|---------|----------|
| 60W     | 7,380 LM         | 123 LM/W | 2       | 10.7"    |
| 100W    | 12,300 LM        | 123 LM/W | 3       | 13.5"    |
| 120W    | 14,760 LM        | 123 LM/W | 4       | 16.3"    |
| 150W    | 28,450 LM        | 123 LM/W | 5       | 19.1"    |
| 200W    | 24,600 LM        | 123 LM/W | 6       | 21.9"    |
| 250W    | 30,750 LM        | 123 LM/W | 7       | 24.7"    |
| 300W    | 36,900 LM        | 123 LM/W | 8       | 27.5"    |

Notes  
Specifications Determined at 5000K and 80° Beam Angle

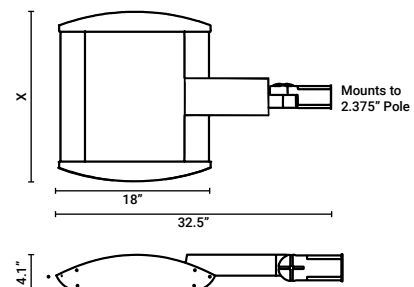**PRODUCT DIMENSIONS**



# ***QUICKSHIP*** ***PRODUCTS***

**FULLY CUSTOMIZABLE LED LUMINAIRES  
DELIVERED WHEN YOU NEED THEM.**

1 Day | 1-5 pcs

3 Days | 5-25 pcs

1 Week | 25-100 pcs

***PARAFLEX***

## DC102

LED WALLPACK LUMINAIRE



QUICK SHIP

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## COMPACT, HEAVY-DUTY HOUSING

The DC102 is a Small 9" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC102 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

## 120-277V STANDARD

## TYPE IV DISTRIBUTION

## PRODUCT APPLICATIONS

|                    |                    |
|--------------------|--------------------|
| Building Entrances | Bridges            |
| Walkways           | Catwalks           |
| Tunnels            | Stairwells         |
| Loading Docks      | Building Exteriors |

## ORDERING GUIDE


Sample Part # DC102 - 12W - 30K - BZ - PC1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)      | HOUSING COLOR | OPTIONS & ACCESSORIES                    |
|-------|---------|------------------------------|---------------|------------------------------------------|
| DC102 |         |                              | BZ            |                                          |
|       | 12W     | 30K 3000K - WARM WHITE       | BZ BRONZE     | PC1 120V PHOTOCELL                       |
|       | 24W     | 40K 4000K - NEUTRAL WHITE    |               | PC2 208/277V PHOTOCELL                   |
|       | 36W     | 50K 5000K - COOL WHITE       |               | MS MOTION SENSOR*                        |
|       |         |                              |               | D1 0-10V DIMMING                         |
|       |         |                              |               | *CONSULT FACTORY FOR ESTIMATED SHIP DATE |
|       |         | QUANTITY                     | SHIPS         |                                          |
|       |         | 1-5 Pieces (Before 11AM EST) | Same Day      |                                          |
|       |         | 5-25 Pieces                  | 3 Days        |                                          |
|       |         | 25-100 Pieces                | 1 Week        |                                          |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 12W             | 12.72          | 3000K | 1,393.50 | 109.55   | STANDARD    |
| 12W             | 12.72          | 4000K | 1,463.18 | 115.03   | STANDARD    |
| 12W             | 12.72          | 5000K | 1,536.33 | 120.78   | STANDARD    |
| 24W             | 23.57          | 3000K | 2,787.00 | 118.24   | STANDARD    |
| 24W             | 23.57          | 4000K | 2,926.35 | 124.16   | STANDARD    |
| 24W             | 23.57          | 5000K | 3,072.67 | 130.36   | STANDARD    |
| 36W             | 34.27          | 3000K | 4,180.50 | 121.99   | STANDARD    |
| 36W             | 34.27          | 4000K | 4,389.53 | 128.09   | STANDARD    |
| 36W             | 34.27          | 5000K | 4,609.00 | 134.49   | STANDARD    |

## PRODUCT DIMENSIONS

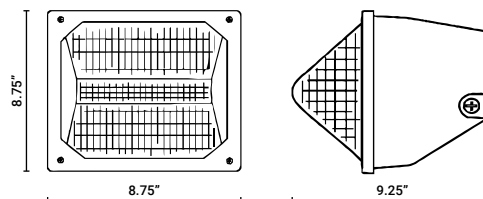

## POWER

POWER FACTOR &gt;90 - THD &lt;20

# DC150

LED WALLPACK LUMINAIRE



**QUICK SHIP**

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## HEAVY-DUTY HOUSING

The DC150 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC150 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

## 120-277V STANDARD

## TYPE IV DISTRIBUTION

## PRODUCT APPLICATIONS

Building Entrances      Bridges  
Walkways                  Catwalks  
Tunnels                    Stairwells  
Loading Docks

## ORDERING GUIDE


Sample Part # DC150 - 12W - 30K - BZ - PC1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)      | HOUSING COLOR | OPTIONS & ACCESSORIES                    |
|-------|---------|------------------------------|---------------|------------------------------------------|
| DC150 |         |                              | BZ            |                                          |
|       | 12W     | 30K 3000K - WARM WHITE       | BZ BRONZE     | PC1 120V PHOTOCELL                       |
|       | 24W     | 40K 4000K - NEUTRAL WHITE    |               | PC2 208/277V PHOTOCELL                   |
|       | 36W     | 50K 5000K - COOL WHITE       |               | MS MOTION SENSOR*                        |
|       | 48W     |                              |               | D1 0-10V DIMMING                         |
|       | 60W     |                              |               | *CONSULT FACTORY FOR ESTIMATED SHIP DATE |
|       | 72W*    |                              |               |                                          |
|       |         | <b>QUANTITY</b>              | <b>SHIPS</b>  |                                          |
|       |         | 1-5 Pieces (Before 11AM EST) | Same Day      |                                          |
|       |         | 5-25 Pieces                  | 3 Days        |                                          |
|       |         | 25-100 Pieces                | 1 Week        |                                          |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS  | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|---------|----------|-------------|
| 12W             | 12.72          | 3000K | 1457.50 | 114.58   | STANDARD    |
| 12W             | 12.72          | 4000K | 1530.38 | 120.31   | STANDARD    |
| 12W             | 12.72          | 5000K | 1606.89 | 126.33   | STANDARD    |
| 24W             | 23.02          | 3000K | 2915.00 | 126.63   | STANDARD    |
| 24W             | 23.02          | 4000K | 3060.75 | 132.96   | STANDARD    |
| 24W             | 23.02          | 5000K | 3213.79 | 139.61   | STANDARD    |
| 36W             | 34.27          | 3000K | 4372.50 | 127.59   | STANDARD    |
| 36W             | 34.27          | 4000K | 4591.12 | 133.97   | STANDARD    |
| 36W             | 34.27          | 5000K | 4820.68 | 140.67   | STANDARD    |
| 48W             | 46.60          | 3000K | 5588.65 | 119.93   | STANDARD    |
| 48W             | 46.60          | 4000K | 5756.31 | 123.53   | STANDARD    |
| 48W             | 46.60          | 5000K | 5929.00 | 127.23   | STANDARD    |
| 60W             | 56.83          | 3000K | 6719.78 | 118.24   | STANDARD    |
| 60W             | 56.83          | 4000K | 7055.77 | 124.16   | STANDARD    |
| 60W             | 56.83          | 5000K | 7408.56 | 130.36   | STANDARD    |
| 72W             | 67.65          | 3000K | 8252.43 | 121.99   | STANDARD    |
| 72W             | 67.65          | 4000K | 8665.05 | 128.09   | STANDARD    |
| 72W             | 67.65          | 5000K | 9098.31 | 134.49   | STANDARD    |

## PRODUCT DIMENSIONS

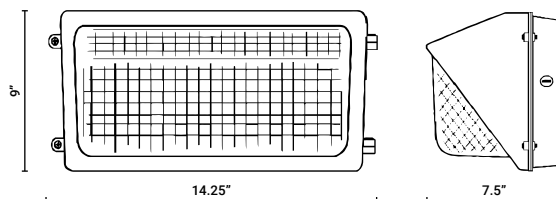

## POWER

POWER FACTOR >90 - THD <20

# DC200

LED WALLPACK LUMINAIRE



**QUICK SHIP**

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## LARGE, HEAVY-DUTY HOUSING

The DC200 is a Large 18" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC200 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

## 120-277V STANDARD

## TYPE IV DISTRIBUTION

## PRODUCT APPLICATIONS

Building Entrances      Bridges  
Walkways                  Catwalks  
Tunnels                    Stairwells  
Loading Docks

## ORDERING GUIDE


Sample Part # DC200 - 12W - 30K - BZ - PC1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)      | HOUSING COLOR | OPTIONS & ACCESSORIES                    |
|-------|---------|------------------------------|---------------|------------------------------------------|
| DC200 |         |                              | BZ            |                                          |
|       | 12W     | 30K 3000K - WARM WHITE       | BZ BRONZE     | PC1 120V PHOTOCELL                       |
|       | 24W     | 40K 4000K - NEUTRAL WHITE    |               | PC2 208/277V PHOTOCELL                   |
|       | 36W     | 50K 5000K - COOL WHITE       |               | MS MOTION SENSOR*                        |
|       | 48W     |                              |               | D1 0-10V DIMMING                         |
|       | 60W     |                              |               | EM EMERGENCY BATTERY PACK*               |
|       | 72W*    |                              |               | *CONSULT FACTORY FOR ESTIMATED SHIP DATE |
|       | 84W*    |                              |               |                                          |
|       | 96W*    |                              |               |                                          |
|       |         | <b>QUANTITY</b>              | <b>SHIPS</b>  |                                          |
|       |         | 1-5 Pieces (Before 11AM EST) | Same Day      |                                          |
|       |         | 5-25 Pieces                  | 3 Days        |                                          |
|       |         | 25-100 Pieces                | 1 Week        |                                          |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS    | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|-----------|----------|-------------|
| 12W             | 12.72          | 3000K | 1,480.50  | 116.39   | STANDARD    |
| 12W             | 12.72          | 4000K | 1,554.53  | 122.21   | STANDARD    |
| 12W             | 12.72          | 5000K | 1,632.25  | 128.32   | STANDARD    |
| 24W             | 23.68          | 3000K | 2,961.00  | 125.04   | STANDARD    |
| 24W             | 23.68          | 4000K | 3,109.05  | 131.29   | STANDARD    |
| 24W             | 23.68          | 5000K | 3,264.50  | 137.86   | STANDARD    |
| 36W             | 34.27          | 3000K | 4,441.50  | 129.60   | STANDARD    |
| 36W             | 34.27          | 4000K | 4,663.58  | 136.08   | STANDARD    |
| 36W             | 34.27          | 5000K | 4,896.75  | 142.89   | STANDARD    |
| 48W             | 46.60          | 3000K | 5,922.00  | 127.08   | STANDARD    |
| 48W             | 46.60          | 4000K | 6,218.10  | 133.44   | STANDARD    |
| 48W             | 46.60          | 5000K | 6,529.01  | 140.11   | STANDARD    |
| 60W             | 56.83          | 3000K | 7,402.50  | 130.26   | STANDARD    |
| 60W             | 56.83          | 4000K | 7,772.63  | 136.77   | STANDARD    |
| 60W             | 56.83          | 5000K | 8,161.26  | 143.61   | STANDARD    |
| 72W             | 67.65          | 3000K | 8,883.00  | 131.31   | STANDARD    |
| 72W             | 67.65          | 4000K | 9,327.15  | 137.87   | STANDARD    |
| 72W             | 67.65          | 5000K | 9,793.51  | 144.77   | STANDARD    |
| 84W             | 81.55          | 3000K | 10,363.50 | 127.08   | NONE        |
| 84W             | 81.55          | 4000K | 10,881.68 | 133.44   | NONE        |
| 84W             | 81.55          | 5000K | 11,425.76 | 140.11   | NONE        |
| 96W             | 91.65          | 3000K | 11,844.00 | 129.23   | NONE        |
| 96W             | 91.65          | 4000K | 12,436.20 | 135.69   | NONE        |
| 96W             | 91.65          | 5000K | 13,058.01 | 142.48   | NONE        |

## PRODUCT DIMENSIONS

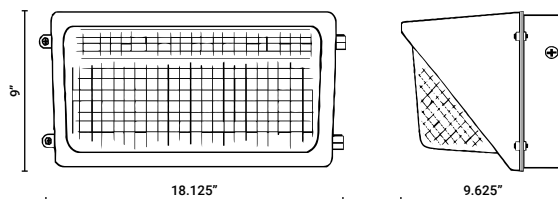

## POWER

POWER FACTOR >90 - THD <20

# DC150-90

CUT-OFF LED WALLPACK LUMINAIRE



QUICK SHIP

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC150-90 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC150-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

## 120-277V STANDARD

## TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Building Entrances  
Walkways  
Tunnels  
Loading Docks  
Bridges  
Catwalks  
Stairwells

## ORDERING GUIDE


Sample Part # DC150-90 - 12W - 30K - BZ - PC1

| MODEL    | WATTAGE | COLOR TEMPERATURE (CCT)      | HOUSING COLOR | OPTIONS & ACCESSORIES                    |
|----------|---------|------------------------------|---------------|------------------------------------------|
| DC150-90 |         |                              | BZ            |                                          |
|          | 12W     | 30K 3000K - WARM WHITE       | BZ BRONZE     | PC1 120V PHOTOCELL                       |
|          | 24W     | 40K 4000K - NEUTRAL WHITE    |               | PC2 208/277V PHOTOCELL                   |
|          | 36W     | 50K 5000K - COOL WHITE       |               | MS MOTION SENSOR*                        |
|          | 48W     |                              |               | D1 0-10V DIMMING                         |
|          | 60W     |                              |               | *CONSULT FACTORY FOR ESTIMATED SHIP DATE |
|          | 72W*    |                              |               |                                          |
|          |         | QUANTITY                     | SHIPS         |                                          |
|          |         | 1-5 Pieces (Before 11AM EST) | Same Day      |                                          |
|          |         | 5-25 Pieces                  | 3 Days        |                                          |
|          |         | 25-100 Pieces                | 1 Week        |                                          |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS    | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|-----------|----------|-------------|
| 12W             | 12.65          | 3000K | 1,530.00  | 120.95   | PREMIUM     |
| 12W             | 12.65          | 4000K | 1,606.50  | 127.00   | PREMIUM     |
| 12W             | 12.65          | 5000K | 1,686.83  | 133.35   | PREMIUM     |
| 24W             | 23.68          | 3000K | 3,060.00  | 129.22   | PREMIUM     |
| 24W             | 23.68          | 4000K | 3,213.00  | 135.68   | PREMIUM     |
| 24W             | 23.68          | 5000K | 3,373.65  | 142.47   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,590.00  | 133.94   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,819.50  | 140.63   | PREMIUM     |
| 36W             | 34.27          | 5000K | 5,060.48  | 147.66   | PREMIUM     |
| 48W             | 46.60          | 3000K | 6,120.00  | 131.33   | PREMIUM     |
| 48W             | 46.60          | 4000K | 6,426.00  | 137.90   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,747.30  | 144.79   | PREMIUM     |
| 60W             | 56.83          | 3000K | 7,650.00  | 134.61   | PREMIUM     |
| 60W             | 56.83          | 4000K | 8,032.50  | 141.34   | PREMIUM     |
| 60W             | 56.83          | 5000K | 8,434.13  | 148.41   | PREMIUM     |
| 72W             | 67.65          | 3000K | 9,180.00  | 135.70   | PREMIUM     |
| 72W             | 67.65          | 4000K | 9,639.00  | 142.48   | PREMIUM     |
| 72W             | 67.65          | 5000K | 10,121.00 | 149.61   | PREMIUM     |

## PRODUCT DIMENSIONS

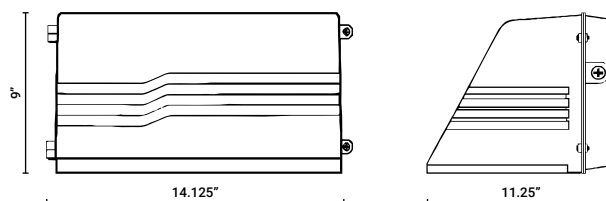

## POWER

POWER FACTOR >90 - THD <20

## DC200-90

CUT-OFF LED WALLPACK LUMINAIRE



QUICK SHIP

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC200-90 is a Large 18" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC200-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells &amp; other Components

## 120-277V STANDARD

## TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

|                    |            |
|--------------------|------------|
| Building Entrances | Bridges    |
| Walkways           | Catwalks   |
| Tunnels            | Stairwells |
| Loading Docks      |            |

## ORDERING GUIDE


Sample Part # DC200-90 - 12W - 30K - BZ - PC1

| MODEL    | WATTAGE | COLOR TEMPERATURE (CCT)      | HOUSING COLOR | OPTIONS & ACCESSORIES                    |
|----------|---------|------------------------------|---------------|------------------------------------------|
| DC200-90 |         |                              | BZ            |                                          |
|          | 12W     | 30K 3000K - WARM WHITE       | BZ BRONZE     | PC1 120V PHOTOCELL                       |
|          | 24W     | 40K 4000K - NEUTRAL WHITE    |               | PC2 208/277V PHOTOCELL                   |
|          | 36W     | 50K 5000K - COOL WHITE       |               | MS MOTION SENSOR*                        |
|          | 48W     |                              |               | D1 0-10V DIMMING                         |
|          | 60W     |                              |               | EM EMERGENCY BATTERY PACK*               |
|          | 72W*    |                              |               | *CONSULT FACTORY FOR ESTIMATED SHIP DATE |
|          | 84W*    |                              |               |                                          |
|          | 96W*    |                              |               |                                          |
|          |         | QUANTITY                     | SHIPS         |                                          |
|          |         | 1-5 Pieces (Before 11AM EST) | Same Day      |                                          |
|          |         | 5-25 Pieces                  | 3 Days        |                                          |
|          |         | 25-100 Pieces                | 1 Week        |                                          |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS    | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|-----------|----------|-------------|
| 12W             | 12.65          | 3000K | 1,530.00  | 120.95   | PREMIUM     |
| 12W             | 12.65          | 4000K | 1,606.50  | 127.00   | PREMIUM     |
| 12W             | 12.65          | 5000K | 1,686.83  | 133.35   | PREMIUM     |
| 24W             | 23.68          | 3000K | 3,060.00  | 129.22   | PREMIUM     |
| 24W             | 23.68          | 4000K | 3,213.00  | 135.68   | PREMIUM     |
| 24W             | 23.68          | 5000K | 3,373.65  | 142.47   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,008.38  | 116.96   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,208.79  | 122.81   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,419.23  | 128.95   | PREMIUM     |
| 48W             | 45.80          | 3000K | 5,344.50  | 116.69   | PREMIUM     |
| 48W             | 45.80          | 4000K | 5,611.73  | 122.53   | PREMIUM     |
| 48W             | 45.80          | 5000K | 5,892.31  | 128.65   | PREMIUM     |
| 60W             | 56.83          | 3000K | 6,680.63  | 117.55   | PREMIUM     |
| 60W             | 56.83          | 4000K | 7,014.66  | 123.43   | PREMIUM     |
| 60W             | 56.83          | 5000K | 7,365.39  | 129.60   | PREMIUM     |
| 72W             | 67.65          | 3000K | 8,016.75  | 118.50   | STANDARD    |
| 72W             | 67.65          | 4000K | 8,417.59  | 124.43   | STANDARD    |
| 72W             | 67.65          | 5000K | 8,838.47  | 130.65   | STANDARD    |
| 84W             | 80.12          | 3000K | 9,352.88  | 116.74   | STANDARD    |
| 84W             | 80.12          | 4000K | 9,820.52  | 122.57   | STANDARD    |
| 84W             | 80.12          | 5000K | 10,311.54 | 128.70   | STANDARD    |
| 96W             | 91.65          | 3000K | 10,689.00 | 116.63   | STANDARD    |
| 96W             | 91.65          | 4000K | 11,223.45 | 122.46   | STANDARD    |
| 96W             | 91.65          | 5000K | 11,784.62 | 128.58   | STANDARD    |

## PRODUCT DIMENSIONS

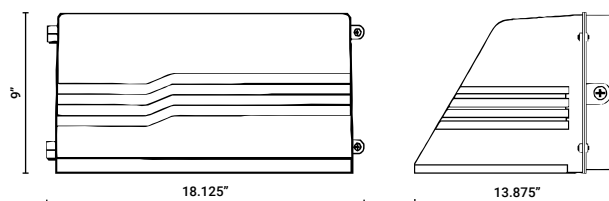

## POWER

POWER FACTOR &gt;90 - THD &lt;20

# DCSHM

ROUND LED WALLPACK LUMINAIRE



**QUICK SHIP**

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## FULL CUT-OFF, HEAVY-DUTY HOUSING

The DCSHM is an 18" Half-Moon Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

4" x 4" Gasketed Wall Plate allows the Installer to Quickly Mount and Wire the Fixture without Opening the Housing

## 120-277V STANDARD

## TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Building Entrances      Bridges  
Walkways                  Catwalks  
Tunnels                    Stairwells  
Loading Docks

## ORDERING GUIDE


Sample Part # DCSHM -12W - 30K - BZ - EM

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)      | HOUSING COLOR | OPTIONS & ACCESSORIES                    |
|-------|---------|------------------------------|---------------|------------------------------------------|
| DCSHM |         |                              | BZ            |                                          |
|       | 12W     | 30K 3000K - WARM WHITE       | BZ BRONZE     | D1 0-10V DIMMING                         |
|       | 24W     | 40K 4000K - NEUTRAL WHITE    |               | EM EMERGENCY BATTERY PACK*               |
|       | 36W     | 50K 5000K - COOL WHITE       |               | *CONSULT FACTORY FOR ESTIMATED SHIP DATE |
|       | 48W     |                              |               |                                          |
|       | 60W     |                              |               |                                          |
|       |         | QUANTITY                     | SHIPS         |                                          |
|       |         | 1-5 Pieces (Before 11AM EST) | Same Day      |                                          |
|       |         | 5-25 Pieces                  | 3 Days        |                                          |
|       |         | 25-100 Pieces                | 1 Week        |                                          |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 12W             | 12.65          | 3000K | 1,530.00 | 120.95   | PREMIUM     |
| 12W             | 12.65          | 4000K | 1,606.50 | 127.00   | PREMIUM     |
| 12W             | 12.65          | 5000K | 1,686.83 | 133.35   | PREMIUM     |
| 24W             | 23.68          | 3000K | 2,802.00 | 118.33   | PREMIUM     |
| 24W             | 23.68          | 4000K | 2,942.10 | 124.24   | PREMIUM     |
| 24W             | 23.68          | 5000K | 3,089.21 | 130.46   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,203.00 | 122.64   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,413.15 | 128.78   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,633.81 | 135.21   | PREMIUM     |
| 48W             | 46.60          | 3000K | 5,604.00 | 120.26   | PREMIUM     |
| 48W             | 46.60          | 4000K | 5,884.20 | 126.27   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,178.41 | 132.58   | PREMIUM     |
| 60W             | 56.83          | 3000K | 7,005.00 | 123.26   | PREMIUM     |
| 60W             | 56.83          | 4000K | 7,355.25 | 129.43   | PREMIUM     |
| 60W             | 56.83          | 5000K | 7,723.01 | 135.90   | PREMIUM     |

## PRODUCT DIMENSIONS

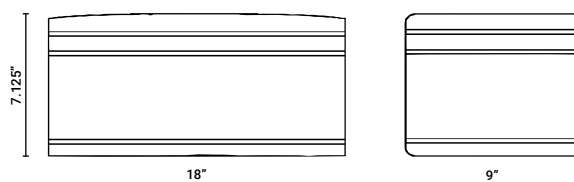

## POWER

POWER FACTOR >90 - THD <20

## DCST

CUT-OFF LED WALLPACK LUMINAIRE



QUICK SHIP

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

**FULL CUT-OFF, HEAVY-DUTY HOUSING**

The DCST is a 14" Trapezoid Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

**WET LOCATION, IP-65 RATED**

Engineered and Constructed for Exterior Environments

**EASY TO INSTALL MOUNTING**

The DCST can be Directly Mounted over an Existing 4" Outlet Box with a 4" x 4" Gasketed Wall Plate

**120-277V STANDARD****TYPE V DISTRIBUTION****PRODUCT APPLICATIONS**

|                    |            |
|--------------------|------------|
| Building Entrances | Bridges    |
| Walkways           | Catwalks   |
| Tunnels            | Stairwells |
| Loading Docks      |            |


**ORDERING GUIDE**

Sample Part # DCST - 12W - 30K - BZ - EM

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)      | HOUSING COLOR | OPTIONS & ACCESSORIES                    |
|-------|---------|------------------------------|---------------|------------------------------------------|
| DCST  |         |                              | BZ            |                                          |
|       | 12W     | 30K 3000K - WARM WHITE       | BZ BRONZE     | D1 0-10V DIMMING                         |
|       | 24W     | 40K 4000K - NEUTRAL WHITE    |               | EM EMERGENCY BATTERY PACK*               |
|       | 36W     | 50K 5000K - COOL WHITE       |               | *CONSULT FACTORY FOR ESTIMATED SHIP DATE |
|       | 48W     |                              |               |                                          |
|       | 60W     |                              |               |                                          |
|       | 72W*    |                              |               |                                          |
|       |         | <b>QUANTITY</b>              | <b>SHIPS</b>  |                                          |
|       |         | 1-5 Pieces (Before 11AM EST) | Same Day      |                                          |
|       |         | 5-25 Pieces                  | 3 Days        |                                          |
|       |         | 25-100 Pieces                | 1 Week        |                                          |

**PRODUCT SPECIFICATIONS**

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 12W             | 12.65          | 3000K | 1,530.00 | 120.95   | PREMIUM     |
| 12W             | 12.65          | 4000K | 1,606.50 | 127.00   | PREMIUM     |
| 12W             | 12.65          | 5000K | 1,686.83 | 133.35   | PREMIUM     |
| 24W             | 23.68          | 3000K | 3,060.00 | 129.22   | PREMIUM     |
| 24W             | 23.68          | 4000K | 3,213.00 | 135.68   | PREMIUM     |
| 24W             | 23.68          | 5000K | 3,373.65 | 142.47   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,147.00 | 121.01   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,354.35 | 127.06   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,572.07 | 133.41   | PREMIUM     |
| 48W             | 45.80          | 3000K | 5,529.33 | 120.73   | PREMIUM     |
| 48W             | 45.80          | 4000K | 5,805.80 | 126.76   | PREMIUM     |
| 48W             | 45.80          | 5000K | 6,096.09 | 133.10   | PREMIUM     |
| 60W             | 56.83          | 3000K | 6,911.67 | 121.62   | PREMIUM     |
| 60W             | 56.83          | 4000K | 7,257.25 | 127.70   | PREMIUM     |
| 60W             | 56.83          | 5000K | 7,620.11 | 134.09   | PREMIUM     |
| 72W             | 67.65          | 3000K | 8,294.00 | 122.60   | PREMIUM     |
| 72W             | 67.65          | 4000K | 8,708.70 | 128.73   | PREMIUM     |
| 72W             | 67.65          | 5000K | 9,144.14 | 135.17   | PREMIUM     |

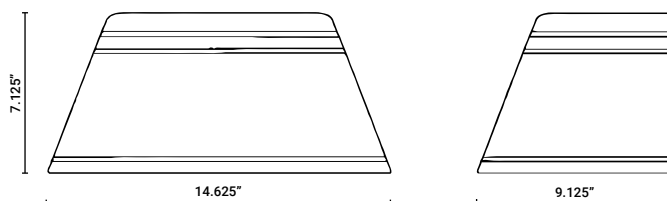**PRODUCT DIMENSIONS****POWER**

POWER FACTOR &gt;90 - THD &lt;20

# CV303

LED CANOPY LUMINAIRE



**QUICK SHIP**

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## COMPACT, HEAVY-DUTY HOUSING

The CV303 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The CV303 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

## 120-277V STANDARD

## TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Building Canopy      Storage Facilities  
Parking Garages      Gas Stations  
Tunnels

## ORDERING GUIDE

Sample Part # CV303 -12W - 30K - BZ - PC1


| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)      | HOUSING COLOR | OPTIONS & ACCESSORIES      |
|-------|---------|------------------------------|---------------|----------------------------|
| CV303 |         |                              | BZ            |                            |
|       | 24W     | 30K 3000K - WARM WHITE       | BZ BRONZE     | PC1 120V PHOTOCELL         |
|       | 36W     | 40K 4000K - NEUTRAL WHITE    |               | PC2 208/277V PHOTOCELL     |
|       | 48W     | 50K 5000K - COOL WHITE       |               | MS MOTION SENSOR*          |
|       | 60W     |                              |               | D1 0-10V DIMMING           |
|       | 72W*    |                              |               | EM EMERGENCY BATTERY PACK* |
|       |         | <b>QUANTITY</b>              | <b>SHIPS</b>  |                            |
|       |         | 1-5 Pieces (Before 11AM EST) | Same Day      |                            |
|       |         | 5-25 Pieces                  | 3 Days        |                            |
|       |         | 25-100 Pieces                | 1 Week        |                            |

\*CONSULT FACTORY FOR ESTIMATED SHIP DATE

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 24W             | 23.54          | 3000K | 2,865.00 | 121.71   | PREMIUM     |
| 24W             | 23.54          | 4000K | 2,950.95 | 125.36   | PREMIUM     |
| 24W             | 23.54          | 5000K | 3,039.48 | 129.12   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,405.69 | 128.56   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,537.86 | 132.41   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,674.00 | 136.39   | PREMIUM     |
| 48W             | 46.60          | 3000K | 5,671.58 | 121.71   | PREMIUM     |
| 48W             | 46.60          | 4000K | 5,841.73 | 125.36   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,016.98 | 129.12   | PREMIUM     |
| 60W             | 56.83          | 3000K | 6,916.65 | 121.71   | PREMIUM     |
| 60W             | 56.83          | 4000K | 7,124.15 | 125.36   | PREMIUM     |
| 60W             | 56.83          | 5000K | 7,337.87 | 129.12   | PREMIUM     |
| 72W             | 67.26          | 3000K | 8,156.00 | 121.26   | PREMIUM     |
| 72W             | 67.26          | 4000K | 8,400.68 | 124.90   | PREMIUM     |
| 72W             | 67.26          | 5000K | 8,652.70 | 128.65   | PREMIUM     |

## PRODUCT DIMENSIONS

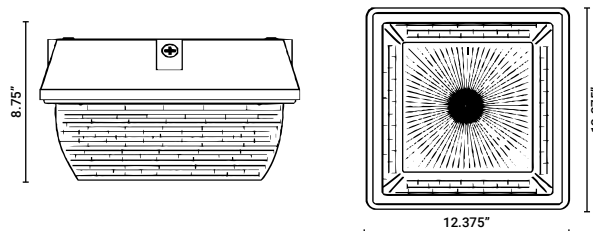

## POWER

POWER FACTOR >90 - THD <20

# CV304

LED CANOPY LUMINAIRE



**QUICK SHIP**

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## COMPACT, HEAVY-DUTY HOUSING

The CV304 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The CV304 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

## 120-277V STANDARD

## TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Building Canopy      Storage Facilities  
Parking Garages      Gas Stations  
Tunnels

## ORDERING GUIDE

Sample Part # CV304 - 12W - 30K - BZ - PC1


| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)      | HOUSING COLOR | OPTIONS & ACCESSORIES      |
|-------|---------|------------------------------|---------------|----------------------------|
| CV304 |         |                              | BZ            |                            |
|       | 24W     | 30K 3000K - WARM WHITE       | BZ BRONZE     | PC1 120V PHOTOCELL         |
|       | 36W     | 40K 4000K - NEUTRAL WHITE    |               | PC2 208/277V PHOTOCELL     |
|       | 48W     | 50K 5000K - COOL WHITE       |               | MS MOTION SENSOR*          |
|       | 60W     |                              |               | D1 0-10V DIMMING           |
|       | 72W*    |                              |               | EM EMERGENCY BATTERY PACK* |
|       |         | <b>QUANTITY</b>              | <b>SHIPS</b>  |                            |
|       |         | 1-5 Pieces (Before 11AM EST) | Same Day      |                            |
|       |         | 5-25 Pieces                  | 3 Days        |                            |
|       |         | 25-100 Pieces                | 1 Week        |                            |

\*CONSULT FACTORY FOR ESTIMATED SHIP DATE

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 24W             | 23.54          | 3000K | 2,875.45 | 122.15   | PREMIUM     |
| 24W             | 23.54          | 4000K | 2,961.71 | 125.82   | PREMIUM     |
| 24W             | 23.54          | 5000K | 3,050.57 | 129.59   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,186.14 | 122.15   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,311.72 | 125.82   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,441.07 | 129.59   | PREMIUM     |
| 48W             | 46.60          | 3000K | 5,692.27 | 122.15   | PREMIUM     |
| 48W             | 46.60          | 4000K | 5,863.04 | 125.82   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,038.93 | 129.59   | PREMIUM     |
| 60W             | 56.83          | 3000K | 6,941.88 | 122.15   | PREMIUM     |
| 60W             | 56.83          | 4000K | 7,150.14 | 125.82   | PREMIUM     |
| 60W             | 56.83          | 5000K | 7,364.64 | 129.59   | PREMIUM     |
| 72W             | 67.26          | 3000K | 8,215.92 | 122.15   | PREMIUM     |
| 72W             | 67.26          | 4000K | 8,462.40 | 125.82   | PREMIUM     |
| 72W             | 67.26          | 5000K | 8,716.27 | 129.59   | PREMIUM     |

## PRODUCT DIMENSIONS

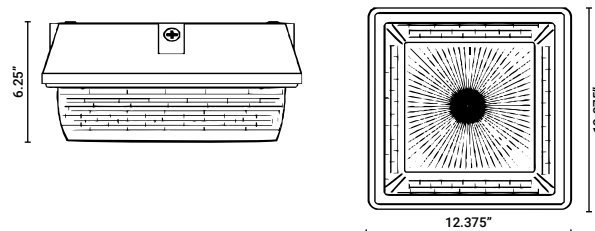

## POWER

POWER FACTOR >90 - THD <20

# CV203

LED CANOPY LUMINAIRE



**QUICK SHIP**

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## COMPACT, HEAVY-DUTY HOUSING

The CV203 is a 9" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The CV203 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

## 120-277V STANDARD

## TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Building Canopy      Storage Facilities  
Parking Garages      Gas Stations  
Tunnels

## ORDERING GUIDE

Sample Part # CV203 - 12W - 30K - BZ - PC1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR | OPTIONS & ACCESSORIES  |
|-------|---------|---------------------------|---------------|------------------------|
| CV203 |         |                           | BZ            |                        |
|       | 12W     | 30K 3000K - WARM WHITE    | BZ BRONZE     | PC1 120V PHOTOCELL     |
|       | 24W     | 40K 4000K - NEUTRAL WHITE |               | PC2 208/277V PHOTOCELL |
|       | 36W     | 50K 5000K - COOL WHITE    |               | D1 0-10V DIMMING       |

## QUANTITY

1-5 Pieces (Before 11AM EST)

5-25 Pieces

25-100 Pieces

## SHIPS

Same Day


3 Days

1 Week

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS  | EFFICACY |
|-----------------|----------------|-------|---------|----------|
| 12W             | 12.65          | 3000K | 1432.50 | 113.24   |
| 12W             | 12.65          | 4000K | 1475.48 | 116.64   |
| 12W             | 12.65          | 5000K | 1519.74 | 120.14   |
| 24W             | 23.54          | 3000K | 2865.00 | 121.71   |
| 24W             | 23.54          | 4000K | 2950.95 | 125.36   |
| 24W             | 23.54          | 5000K | 3039.48 | 129.12   |
| 36W             | 34.27          | 3000K | 4405.69 | 128.56   |
| 36W             | 34.27          | 4000K | 4537.86 | 132.41   |
| 36W             | 34.27          | 5000K | 4674.00 | 136.39   |

## PRODUCT DIMENSIONS

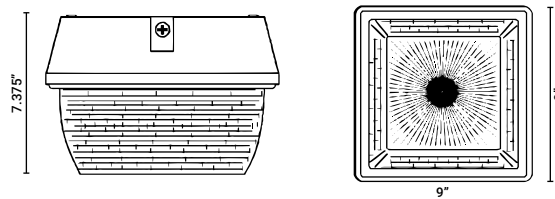

## POWER

POWER FACTOR >90 - THD <20

# CV15G

LED CANOPY LUMINAIRE



**QUICK SHIP**

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## COMPACT, HEAVY-DUTY HOUSING

The CV15G is a 15" Circular Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The CV15G can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

## 120-277V STANDARD

## TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Building Canopy      Storage Facilities  
Parking Garages      Gas Stations  
Tunnels

## ORDERING GUIDE


Sample Part # CV15G - 12W - 30K - BZ - PC1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)      | HOUSING COLOR | OPTIONS & ACCESSORIES                    |
|-------|---------|------------------------------|---------------|------------------------------------------|
| CV15G |         |                              | BZ            |                                          |
|       | 12W     | 30K 3000K - WARM WHITE       | BZ BRONZE     | PC1 120V PHOTOCELL                       |
|       | 24W     | 40K 4000K - NEUTRAL WHITE    |               | PC2 208/277V PHOTOCELL                   |
|       | 36W     | 50K 5000K - COOL WHITE       |               | MS MOTION SENSOR*                        |
|       | 48W     |                              |               | D1 0-10V DIMMING                         |
|       | 60W     |                              |               | EM EMERGENCY BATTERY PACK*               |
|       | 72W*    |                              |               | *CONSULT FACTORY FOR ESTIMATED SHIP DATE |
|       | 84W*    |                              |               |                                          |
|       | 96W*    |                              |               |                                          |
|       |         | <b>QUANTITY</b>              | <b>SHIPS</b>  |                                          |
|       |         | 1-5 Pieces (Before 11AM EST) | Same Day      |                                          |
|       |         | 5-25 Pieces                  | 3 Days        |                                          |
|       |         | 25-100 Pieces                | 1 Week        |                                          |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY |
|-----------------|----------------|-------|----------|----------|
| 12W             | 12.65          | 3000K | 1362.50  | 107.71   |
| 12W             | 12.65          | 4000K | 1403.38  | 110.94   |
| 12W             | 12.65          | 5000K | 1445.48  | 114.27   |
| 24W             | 23.54          | 3000K | 2725.00  | 115.76   |
| 24W             | 23.54          | 4000K | 2806.75  | 119.23   |
| 24W             | 23.54          | 5000K | 2890.95  | 122.81   |
| 36W             | 34.27          | 3000K | 4097.74  | 119.57   |
| 36W             | 34.27          | 4000K | 4220.68  | 123.16   |
| 36W             | 34.27          | 5000K | 4347.30  | 126.85   |
| 48W             | 46.6           | 3000K | 5450.00  | 116.95   |
| 48W             | 46.6           | 4000K | 5613.50  | 120.46   |
| 48W             | 46.6           | 5000K | 5781.91  | 124.08   |
| 60W             | 56.83          | 3000K | 6812.50  | 119.88   |
| 60W             | 56.83          | 4000K | 7016.88  | 123.47   |
| 60W             | 56.83          | 5000K | 7227.38  | 127.18   |
| 72W             | 67.26          | 3000K | 8175.00  | 121.54   |
| 72W             | 67.26          | 4000K | 8420.25  | 125.19   |
| 72W             | 67.26          | 5000K | 8672.86  | 128.95   |
| 84W             | 81.55          | 3000K | 9537.50  | 116.95   |
| 84W             | 81.55          | 4000K | 9823.63  | 120.46   |
| 84W             | 81.55          | 5000K | 10118.33 | 124.08   |
| 96W             | 92.21          | 3000K | 10900.00 | 118.21   |
| 96W             | 92.21          | 4000K | 11227.00 | 121.75   |
| 96W             | 92.21          | 5000K | 11563.81 | 125.41   |

## PRODUCT DIMENSIONS

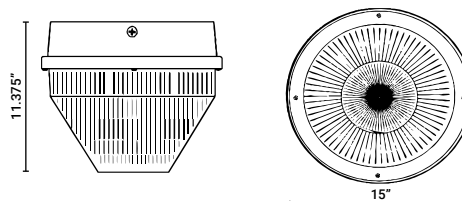

## POWER

POWER FACTOR >90 - THD <20

# DC545

LED FLOODLIGHT LUMINAIRE



**QUICK SHIP**

When Specifying Options, Please Check with Factory for Availability and Lead-Time.



## COMPACT, HEAVY-DUTY HOUSING

The DC545 is a 9" Square Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC545 comes standard with an Integral 1/2" Male Threaded Mount with an Optional Post Top Fitter available

## 120-277V STANDARD

## TYPE V DISTRIBUTION

## PRODUCT APPLICATIONS

Parking Lots  
Walkways  
Buildings  
Signage  
Playgrounds  
Parks & Recreational Fields  
Loading Docks

## ORDERING GUIDE

Sample Part # DC545 - 12W - 30K - BZ - PT

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR | OPTIONS & ACCESSORIES |
|-------|---------|---------------------------|---------------|-----------------------|
| DC545 |         |                           | BZ            |                       |
|       | 12W     | 30K 3000K - WARM WHITE    | BZ BRONZE     | PT POST TOP FITTER    |
|       | 24W     | 40K 4000K - NEUTRAL WHITE |               | D1 0-10V DIMMING      |
|       | 36W     | 50K 5000K - COOL WHITE    |               |                       |
|       | 48W     |                           |               |                       |

## QUANTITY

1-5 Pieces (Before 11AM EST)

5-25 Pieces

25-100 Pieces

## SHIPS

Same Day


3 Days

1 Week

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 12W             | 12.72          | 3000K | 1,408.25 | 110.71   | PREMIUM     |
| 12W             | 12.72          | 4000K | 1,478.66 | 116.25   | PREMIUM     |
| 12W             | 12.72          | 5000K | 1,552.60 | 122.06   | PREMIUM     |
| 24W             | 23.68          | 3000K | 2,816.50 | 118.94   | PREMIUM     |
| 24W             | 23.68          | 4000K | 2,957.32 | 124.89   | PREMIUM     |
| 24W             | 23.68          | 5000K | 3,105.19 | 131.13   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,224.75 | 123.28   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,435.99 | 129.44   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,657.79 | 135.91   | PREMIUM     |
| 48W             | 45.70          | 3000K | 5,633.00 | 123.26   | PREMIUM     |
| 48W             | 46.60          | 4000K | 5,914.65 | 126.92   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,210.38 | 133.27   | PREMIUM     |

## PRODUCT DIMENSIONS

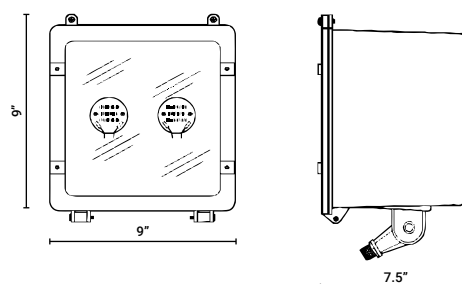

## POWER

POWER FACTOR >90 - THD <20

# DC560

LED FLOODLIGHT LUMINAIRE



QUICK SHIP

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## COMPACT, HEAVY-DUTY HOUSING

The DC560 is a 12"x 8" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC560 comes standard with an Integral 1/2" Female Threaded Mount

## 120-277V STANDARD

## TYPE III DISTRIBUTION

## PRODUCT APPLICATIONS

Parking Lots

Walkways

Buildings

Signage

Playgrounds

Parks & Recreational Fields

Loading Docks

## ORDERING GUIDE

Sample Part # DC560 - 12W - 30K - BZ - PC1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR | OPTIONS & ACCESSORIES  |
|-------|---------|---------------------------|---------------|------------------------|
| DC560 |         |                           | BZ            |                        |
|       | 12W     | 30K 3000K - WARM WHITE    | BZ BRONZE     | PC1 120V PHOTOCELL     |
|       | 24W     | 40K 4000K - NEUTRAL WHITE |               | PC2 208/277V PHOTOCELL |
|       | 36W     | 50K 5000K - COOL WHITE    |               | D1 0-10V DIMMING       |
|       | 48W     |                           |               |                        |

## QUANTITY

1-5 Pieces (Before 11AM EST)

5-25 Pieces

25-100 Pieces

## SHIPS

Same Day


3 Days

1 Week

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 12W             | 12.73          | 3000K | 1,487.00 | 116.81   | PREMIUM     |
| 12W             | 12.72          | 4000K | 1,561.35 | 122.75   | PREMIUM     |
| 12W             | 12.72          | 5000K | 1,639.42 | 128.89   | PREMIUM     |
| 24W             | 23.68          | 3000K | 2,974.00 | 125.59   | PREMIUM     |
| 24W             | 23.68          | 4000K | 3,122.70 | 131.87   | PREMIUM     |
| 24W             | 23.68          | 5000K | 3,278.83 | 138.46   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,461.00 | 130.17   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,684.05 | 136.68   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,918.25 | 143.51   | PREMIUM     |
| 48W             | 46.60          | 3000K | 5,948.00 | 127.64   | PREMIUM     |
| 48W             | 46.60          | 4000K | 6,245.40 | 134.02   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,557.67 | 140.72   | PREMIUM     |

## PRODUCT DIMENSIONS

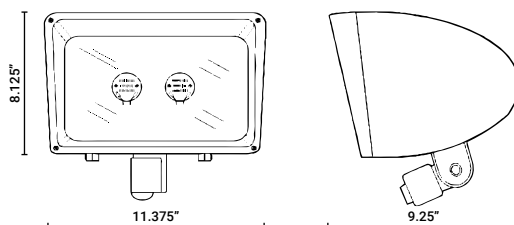

## POWER

POWER FACTOR >90 - THD <20

# DC531

LED FLOODLIGHT LUMINAIRE



**QUICK SHIP**

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## COMPACT, HEAVY-DUTY HOUSING

The DC531 is a Small Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## EASY TO INSTALL MOUNTING

The DC531 comes standard with an Integral 1/2" Male Threaded Mount with an Optional Post Top Fitter available

## 120-277V STANDARD

## TYPE II DISTRIBUTION

## PRODUCT APPLICATIONS

Parking Lots

Walkways

Buildings

Signage

Playgrounds

Parks & Recreational Fields

Loading Docks

## ORDERING GUIDE

Sample Part # DC531 - 12W - 30K - BZ - PC1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)   | HOUSING COLOR | OPTIONS & ACCESSORIES  |
|-------|---------|---------------------------|---------------|------------------------|
| DC531 |         |                           | BZ            |                        |
|       | 12W     | 30K 3000K - WARM WHITE    | BZ BRONZE     | PC1 120V PHOTOCELL     |
|       | 24W     | 40K 4000K - NEUTRAL WHITE |               | PC2 208/277V PHOTOCELL |
|       | 36W     | 50K 5000K - COOL WHITE    |               | PT POST TOP FITTER     |
|       |         |                           |               | D1 0-10V DIMMING       |

## QUANTITY

1-5 Pieces (Before 11AM EST)

5-25 Pieces

25-100 Pieces

## SHIPS

Same Day


3 Days

1 Week

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS   | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|----------|----------|-------------|
| 12W             | 12.39          | 3000K | 1,333.00 | 107.59   | PREMIUM     |
| 12W             | 12.72          | 4000K | 1,399.65 | 110.04   | PREMIUM     |
| 12W             | 12.72          | 5000K | 1,469.63 | 115.54   | PREMIUM     |
| 24W             | 23.68          | 3000K | 2,666.00 | 112.58   | PREMIUM     |
| 24W             | 23.68          | 4000K | 2,799.30 | 118.21   | PREMIUM     |
| 24W             | 23.68          | 5000K | 2,939.26 | 124.12   | PREMIUM     |
| 36W             | 34.27          | 3000K | 3,999.00 | 116.69   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,198.95 | 122.53   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,408.90 | 128.65   | PREMIUM     |

## PRODUCT DIMENSIONS

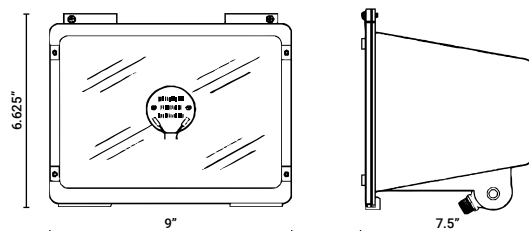

## POWER

POWER FACTOR >90 - THD <20

## DC400

LED FLOODLIGHT LUMINAIRE



QUICK SHIP

When Specifying Options, Please Check with Factory for Availability and Lead-Time.

## COMPACT, HEAVY-DUTY HOUSING

The DC400 is a 16"x 10" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## VERSATILE MOUNTING OPTIONS

The DC400 is available with Three Mounting Options: Trunnion, Slip-Fitter and Straight Arm

## 120-277V STANDARD

## TYPE VS DISTRIBUTION

## PRODUCT APPLICATIONS

Parking Lots

Walkways

Buildings

Signage

Playgrounds

Parks &amp; Recreational Fields

Loading Docks

## ORDERING GUIDE


Sample Part # DC400 - 12W - 30K - BZ - NA - PC1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)      | HOUSING COLOR | MOUNTING            | OPTIONS & ACCESSORIES                    |
|-------|---------|------------------------------|---------------|---------------------|------------------------------------------|
| DC400 |         |                              | BZ            |                     |                                          |
|       | 12W     | 30K 3000K - WARM WHITE       | BZ BRONZE     | NA NONE (BY OTHERS) | PC1 120V PHOTOCELL                       |
|       | 24W     | 40K 4000K - NEUTRAL WHITE    |               | TR TRUNNION MOUNT   | PC2 208/277V PHOTOCELL                   |
|       | 36W     | 50K 5000K - COOL WHITE       |               | SF SLIP-FITTER      | MS MOTION SENSOR*                        |
|       | 48W     |                              |               | ST STRAIGHT ARM     | D1 0-10V DIMMING                         |
|       | 60W     |                              |               |                     | EM EMERGENCY BATTERY PACK*               |
|       | 72W*    | QUANTITY                     | SHIPS         |                     | *CONSULT FACTORY FOR ESTIMATED SHIP DATE |
|       | 84W*    | 1-5 Pieces (Before 11AM EST) | Same Day      |                     |                                          |
|       | 96W*    | 5-25 Pieces                  | 3 Days        |                     |                                          |
|       |         | 25-100 Pieces                | 1 Week        |                     |                                          |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS    | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|-----------|----------|-------------|
| 12W             | 12.40          | 3000K | 1,333.00  | 107.59   | PREMIUM     |
| 12W             | 12.72          | 4000K | 1,399.65  | 110.04   | PREMIUM     |
| 12W             | 12.72          | 5000K | 1,469.63  | 115.54   | PREMIUM     |
| 24W             | 23.68          | 3000K | 2,636.25  | 111.33   | PREMIUM     |
| 24W             | 23.68          | 4000K | 2,768.06  | 116.89   | PREMIUM     |
| 24W             | 23.68          | 5000K | 2,906.47  | 122.74   | PREMIUM     |
| 36W             | 34.27          | 3000K | 3,954.38  | 115.39   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,152.09  | 121.16   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,359.70  | 127.22   | PREMIUM     |
| 48W             | 46.60          | 3000K | 5,633.00  | 120.88   | PREMIUM     |
| 48W             | 46.60          | 4000K | 5,914.65  | 126.92   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,210.38  | 133.27   | PREMIUM     |
| 60W             | 56.83          | 3000K | 6,823.00  | 120.06   | PREMIUM     |
| 60W             | 56.83          | 4000K | 7,164.15  | 126.06   | PREMIUM     |
| 60W             | 56.83          | 5000K | 7,522.36  | 132.37   | PREMIUM     |
| 72W             | 67.65          | 3000K | 8,122.05  | 120.06   | PREMIUM     |
| 72W             | 67.65          | 4000K | 8,528.15  | 126.06   | STANDARD    |
| 72W             | 67.65          | 5000K | 8,954.56  | 132.37   | STANDARD    |
| 84W             | 80.26          | 3000K | 9,636.00  | 120.06   | STANDARD    |
| 84W             | 81.55          | 4000K | 10,117.80 | 124.07   | STANDARD    |
| 84W             | 81.55          | 5000K | 10,623.70 | 130.27   | STANDARD    |
| 96W             | 92.50          | 3000K | 10,545.00 | 114.00   | STANDARD    |
| 96W             | 91.65          | 4000K | 11,310.00 | 123.40   | STANDARD    |
| 96W             | 91.65          | 5000K | 11,625.90 | 126.85   | STANDARD    |

## PRODUCT DIMENSIONS

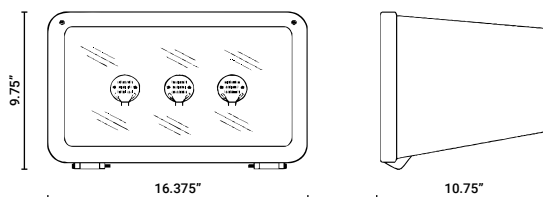

## POWER

POWER FACTOR &gt;90 - THD &lt;20

# DC570

LED FLOODLIGHT LUMINAIRE



QUICK SHIP

When Specifying Options, Please Check with Factory for Availability and Lead-Time.



## COMPACT, HEAVY-DUTY HOUSING

The DC570 is a 16" Square Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

## WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

## VERSATILE MOUNTING OPTIONS

The DC570 is available with Three Mounting Options: Trunnion, Slip-Fitter and Straight Arm

## 120-277V STANDARD

## TYPE V DISTRIBUTION

## PRODUCT APPLICATIONS

Parking Lots  
Walkways  
Buildings  
Signage  
Playgrounds  
Parks & Recreational Fields  
Loading Docks

## ORDERING GUIDE


Sample Part # DC570 - 12W - 30K - BZ - NA - PC1

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT)      | HOUSING COLOR | MOUNTING            | OPTIONS & ACCESSORIES                    |
|-------|---------|------------------------------|---------------|---------------------|------------------------------------------|
| DC570 |         |                              | BZ            |                     |                                          |
|       | 12W     | 30K 3000K - WARM WHITE       | BZ BRONZE     | NA NONE (BY OTHERS) | PC1 120V PHOTOCELL                       |
|       | 24W     | 40K 4000K - NEUTRAL WHITE    |               | TR TRUNNION MOUNT   | PC2 208/277V PHOTOCELL                   |
|       | 36W     | 50K 5000K - COOL WHITE       |               | SF SLIP-FITTER      | MS MOTION SENSOR*                        |
|       | 48W     |                              |               | ST STRAIGHT ARM     | D1 0-10V DIMMING                         |
|       | 60W     |                              |               |                     | EM EMERGENCY BATTERY PACK*               |
|       | 72W*    |                              |               |                     | *CONSULT FACTORY FOR ESTIMATED SHIP DATE |
|       | 84W*    |                              |               |                     |                                          |
|       | 96W*    |                              |               |                     |                                          |
|       |         | QUANTITY                     | SHIPS         |                     |                                          |
|       |         | 1-5 Pieces (Before 11AM EST) | Same Day      |                     |                                          |
|       |         | 5-25 Pieces                  | 3 Days        |                     |                                          |
|       |         | 25-100 Pieces                | 1 Week        |                     |                                          |

## PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT   | LUMENS    | EFFICACY | DLC LISTING |
|-----------------|----------------|-------|-----------|----------|-------------|
| 12W             | 12.72          | 3000K | 1,391.25  | 109.38   | PREMIUM     |
| 12W             | 12.72          | 4000K | 1,460.81  | 114.84   | PREMIUM     |
| 12W             | 12.72          | 5000K | 1,533.85  | 120.59   | PREMIUM     |
| 24W             | 23.68          | 3000K | 2,782.50  | 117.50   | PREMIUM     |
| 24W             | 23.68          | 4000K | 2,921.62  | 123.38   | PREMIUM     |
| 24W             | 23.68          | 5000K | 3,067.71  | 129.55   | PREMIUM     |
| 36W             | 34.27          | 3000K | 4,173.75  | 121.79   | PREMIUM     |
| 36W             | 34.27          | 4000K | 4,382.44  | 127.88   | PREMIUM     |
| 36W             | 34.27          | 5000K | 4,601.56  | 134.27   | PREMIUM     |
| 48W             | 46.60          | 3000K | 5,633.00  | 120.88   | PREMIUM     |
| 48W             | 46.60          | 4000K | 5,914.65  | 126.92   | PREMIUM     |
| 48W             | 46.60          | 5000K | 6,210.38  | 133.27   | PREMIUM     |
| 60W             | 56.83          | 3000K | 6,956.25  | 122.40   | STANDARD    |
| 60W             | 56.83          | 4000K | 7,304.06  | 128.52   | STANDARD    |
| 60W             | 56.83          | 5000K | 7,669.27  | 134.95   | STANDARD    |
| 72W             | 67.65          | 3000K | 8,347.50  | 123.39   | STANDARD    |
| 72W             | 67.65          | 4000K | 8,764.88  | 129.56   | STANDARD    |
| 72W             | 67.65          | 5000K | 9,203.12  | 136.04   | STANDARD    |
| 84W             | 81.55          | 3000K | 9,738.75  | 119.42   | STANDARD    |
| 84W             | 81.55          | 4000K | 10,225.70 | 125.39   | STANDARD    |
| 84W             | 81.55          | 5000K | 10,737.00 | 131.66   | STANDARD    |
| 96W             | 91.40          | 3000K | 11,130.00 | 121.77   | STANDARD    |
| 96W             | 91.65          | 4000K | 11,686.50 | 127.51   | STANDARD    |
| 96W             | 91.65          | 5000K | 12,270.80 | 133.89   | STANDARD    |

## PRODUCT DIMENSIONS

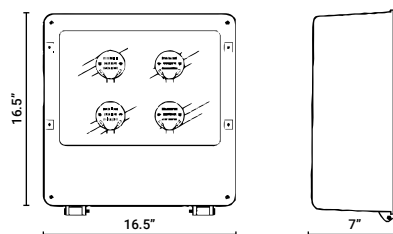

## POWER

POWER FACTOR >90 - THD <20



**3 Luger Rd. #1**

**Denville, NJ 07834**

**PHONE // (973) 340-6040**

**WEB // [www.paraflex.com](http://www.paraflex.com)**