



PARAFLEX
Fast Flexible Focused Lighting

2018
Catalog



FAST
FLEXIBLE
FOCUSED



Table Of **Contents**

4	About Us
8	ZFLEX Catalog
18	Exterior Catalog
20	<i>Wallpack</i>
34	<i>Canopy & Garage</i>
42	<i>Floodlight</i>
54	<i>Area & Post Top</i>
58	QuickShip Catalog

// The Paraflex **Way**


For over **50 years**, Paraflex Industries has manufactured high quality products for the Lighting Industry. Paraflex prides itself on providing customers with access to the latest advancements in lighting technology while not compromising its core values.





Fast Solutions

From Quotes to Orders to Shipping PARAFLEX has developed the internal processes to quickly serve your project needs.



Flexible Products

PARAFLEX offers customers with configurable lighting products built to serve a wide variety of project applications.



Focused on Service


Our team of experts is ready to serve our customers in a very timely and efficient manner. Reach out today and experience The PARAFLEX Way!

// EXTERIOR


ZFLEX



WALLPACK

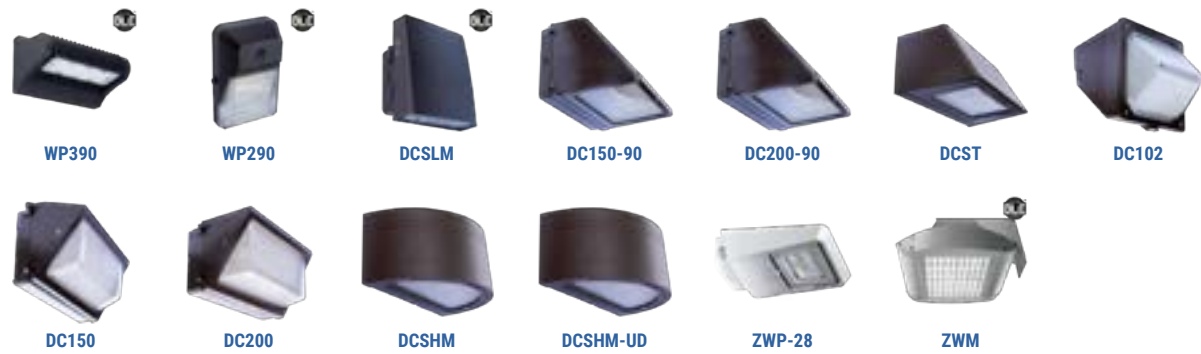

CANOPY & GARAGE

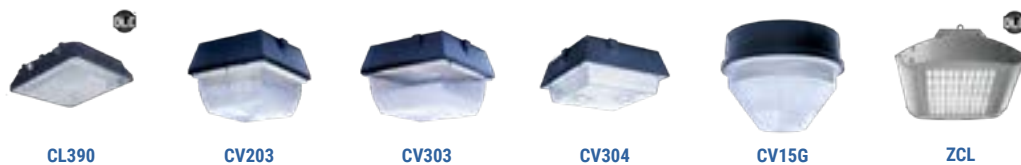

FLOODLIGHTS




AREA & POST TOP



WALLPACK



DC102-QS



DC150-QS




DC200-QS



DC150-90-QS



DC200-90-QS



DCSHM-QS



DCSHM-UD-QS



DCST-QS

CANOPY & GARAGE



CV203-QS



CV303-QS



CV304-QS



CV15G-QS

FLOODLIGHTS



DC531-QS



DC545-QS



DC560-QS



DC400-QS



DC570-QS





ZFLEX SERIES

ONE HOUSING, SIX MOUNTING OPTIONS
& THOUSANDS OF POSSIBILITIES

Wall Mount

Floodlight

Canopy

Post Top

Post Top w/Arm

High Bay

PARAFLEX

ZSL



ZCL



ZWM



// *Citrus Bowl Stadium*

Recently, **The Citrus Bowl** (now Camping World Stadium) underwent a major reconstruction project designed to modernize the facility and allow it to continue drawing high-profile events. One of key design features of the project was to create a **vibrant, open-air facade** to help increase the fan experience as well as modernize the exterior facade.

Paraflex's **ZFLEX LED Luminaire** was chosen as the premier light to illuminate this complex project. **The ZFLEX LED Luminaire** offered the design team with a wide variety of mounting options and lumen packages which together provided the stadium with a cohesive architectural style.

// *FEATURED PRODUCTS*



ZSL
Post Top



ZCL
Canopy



ZWM
Wall Mount

ZWM

FLEXIBLE LED WALL MOUNT LUMINAIRE



HEAVY-DUTY, IP-66 RATED HOUSING

The ZWM is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZWM to meet a wide-range of project requirements

EASY TO INSTALL MOUNTING HARDWARE

The ZWM comes standard with a Wall Mount Bracket engineered to be installed within a variety of Exterior Applications

120-277V STANDARD

PRODUCT APPLICATIONS

Parking Lots Bridges
Walkways Catwalks
Tunnels
Loading Docks

ORDERING GUIDE


Sample Part # ZWM - 100W - 40K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTICS	HOUSING COLOR	OPTIONS & ACCESSORIES
ZWM					
	60W	30K 3000K - WARM WHITE	T1 TYPE I	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	100W	40K 4000K - NEUTRAL WHITE	T2 TYPE II	WH WHITE	PC2 208/277V PHOTOCELL
	120W	50K 5000K - COOL WHITE	T3 TYPE III	BL BLACK	MS MOTION SENSOR
	150W	57K 5700K - DAYLIGHT	T4 TYPE IV	SL SILVER	D1 0-10V DIMMING
	200W		20D TYPE V - 20° BEAM ANGLE		D2 STEP DIMMING
	250W		40D TYPE V - 40° BEAM ANGLE		NC1 NETWORK CONTROLS FOR ZIGBEE
	300W		80D TYPE V - 80° BEAM ANGLE		HS HOUSE-SIDE SHIELD
			170D TYPE V - 170° BEAM ANGLE		WG PROTECTIVE WIRE GUARD
					V1* 480/347V INPUT (120-277V STANDARD)
					*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

WATTAGE	DELIVERED LUMENS	EFFICACY	MODULES	X: WIDTH
60W	8,880 LM	148 LM/W	2	10.7"
100W	14,390 LM	148 LM/W	3	13.5"
120W	17,770 LM	149 LM/W	4	16.3"
150W	22,050 LM	148 LM/W	5	19.1"
200W	29,540 LM	149 LM/W	6	21.9"
250W	36,040 LM	148 LM/W	7	24.7"
300W	44,575 LM	147 LM/W	8	27.5"

PRODUCT DIMENSIONS



ZCL

FLEXIBLE LED CANOPY & GARAGE LUMINAIRE



HEAVY-DUTY, IP-66 RATED HOUSING

The ZCL is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZCL to meet a wide-range of project requirements

EASY TO INSTALL MOUNTING HARDWARE

The ZCL comes standard with a Removable Bracket engineered to be installed within a variety of Surface Mounting Applications

120-277V STANDARD

PRODUCT APPLICATIONS

Building Canopy	Gas Stations
Parking Garages	Catwalks
Tunnels	Storage Facilities
Bridges	Concourses

ORDERING GUIDE


Sample Part # ZCL - 100W - 40K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTICS	HOUSING COLOR	OPTIONS & ACCESSORIES
ZCL					
	60W	30K 3000K - WARM WHITE	T1 TYPE I	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	100W	40K 4000K - NEUTRAL WHITE	T2 TYPE II	WH WHITE	PC2 208/277V PHOTOCELL
	120W	50K 5000K - COOL WHITE	T3 TYPE III	BL BLACK	MS MOTION SENSOR
	150W	57K 5700K - DAYLIGHT	T4 TYPE IV	SL SILVER	D1 0-10V DIMMING
	200W		20D TYPE V - 20° BEAM ANGLE		D2 STEP DIMMING
	250W		40D TYPE V - 40° BEAM ANGLE		NC1 NETWORK CONTROLS FOR ZIGBEE
	300W		80D TYPE V - 80° BEAM ANGLE		HS HOUSE-SIDE SHIELD
			170D TYPE V - 170° BEAM ANGLE		WG PROTECTIVE WIRE GUARD
					V1* 480/347V INPUT (120-277V STANDARD)
					*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

WATTAGE	DELIVERED LUMENS	EFFICACY	MODULES	X: WIDTH
60W	8,880 LM	148 LM/W	2	10.7"
100W	14,390 LM	148 LM/W	3	13.5"
120W	17,770 LM	149 LM/W	4	16.3"
150W	22,050 LM	148 LM/W	5	19.1"
200W	29,540 LM	149 LM/W	6	21.9"
250W	36,040 LM	148 LM/W	7	24.7"
300W	44,575 LM	147 LM/W	8	27.5"

PRODUCT DIMENSIONS



ZFL

FLEXIBLE LED FLOODLIGHT LUMINAIRE

**HEAVY-DUTY, IP-66 RATED HOUSING**

The ZFL is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZFL to meet a wide-range of project requirements

EASY TO INSTALL MOUNTING HARDWARE

The ZFL comes standard with a Yoke Mount Bracket engineered to be installed within a variety of Area & Flood Applications

120-277V STANDARD**PRODUCT APPLICATIONS**

Parking Lots	Playgrounds
Walkways	Parks & Recreational Fields
Buildings	Loading Docks
Signage	Flagpoles


ORDERING GUIDE

Sample Part # ZFL - 100W - 40K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTICS	HOUSING COLOR	OPTIONS & ACCESSORIES
ZFL					
	60W	30K 3000K - WARM WHITE	T1 TYPE I	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	100W	40K 4000K - NEUTRAL WHITE	T2 TYPE II	WH WHITE	PC2 208/277V PHOTOCELL
	120W	50K 5000K - COOL WHITE	T3 TYPE III	BL BLACK	MS MOTION SENSOR
	150W	57K 5700K - DAYLIGHT	T4 TYPE IV	SL SILVER	D1 0-10V DIMMING
	200W		20D TYPE V - 20° BEAM ANGLE		D2 STEP DIMMING
	250W		40D TYPE V - 40° BEAM ANGLE		NC1 NETWORK CONTROLS FOR ZIGBEE
	300W		80D TYPE V - 80° BEAM ANGLE		HS HOUSE-SIDE SHIELD
			170D TYPE V - 170° BEAM ANGLE		WG PROTECTIVE WIRE GUARD
					V1* 480/347V INPUT (120-277V STANDARD)
					*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

WATTAGE	DELIVERED LUMENS	EFFICACY	MODULES	EPA	X: WIDTH
60W	8,880 LM	148 LM/W	2	1.404	10.7"
100W	14,390 LM	148 LM/W	3	1.812	13.5"
120W	17,770 LM	149 LM/W	4	2.22	16.3"
150W	22,050 LM	148 LM/W	5	2.628	19.1"
200W	29,540 LM	149 LM/W	6	3.036	21.9"
250W	36,040 LM	148 LM/W	7	3.444	24.7"
300W	44,575 LM	147 LM/W	8	3.852	27.5"

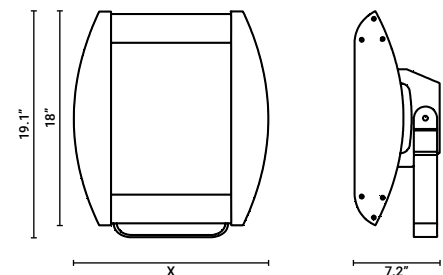PRODUCT DIMENSIONS

ZPT

FLEXIBLE LED POST TOP LUMINAIRE

**HEAVY-DUTY, IP-66 RATED HOUSING**

The ZPT is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZPT to meet a wide-range of project requirements

EASY TO INSTALL MOUNTING HARDWARE

The ZPT comes standard with a Pole Top Arm engineered to be installed on a 2.375" Diameter Pole

120-277V STANDARD**PRODUCT APPLICATIONS**

Parking Lots Playgrounds
Walkways Parks & Recreational Fields
Streetscapes
Plazas

ORDERING GUIDE

Sample Part # ZPT - 100W - 40K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTICS	HOUSING COLOR	OPTIONS & ACCESSORIES
ZPT					
	60W	30K 3000K - WARM WHITE	T1 TYPE I	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	100W	40K 4000K - NEUTRAL WHITE	T2 TYPE II	WH WHITE	PC2 208/277V PHOTOCELL
	120W	50K 5000K - COOL WHITE	T3 TYPE III	BL BLACK	MS MOTION SENSOR
	150W	57K 5700K - DAYLIGHT	T4 TYPE IV	SL SILVER	D1 0-10V DIMMING
	200W		20D TYPE V - 20° BEAM ANGLE		D2 STEP DIMMING
	250W		40D TYPE V - 40° BEAM ANGLE		NC1 NETWORK CONTROLS FOR ZIGBEE
	300W		80D TYPE V - 80° BEAM ANGLE		HS HOUSE-SIDE SHIELD
			170D TYPE V - 170° BEAM ANGLE		WG PROTECTIVE WIRE GUARD
					V1* 480/347V INPUT (120-277V STANDARD)
					*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

WATTAGE	DELIVERED LUMENS	EFFICACY	MODULES	EPA	X: WIDTH	PRODUCT DIMENSIONS	
60W	8,880 LM	148 LM/W	2	1.404	10.7"		
100W	14,390 LM	148 LM/W	3	1.812	13.5"		
120W	17,770 LM	149 LM/W	4	2.22	16.3"		
150W	22,050 LM	148 LM/W	5	2.628	19.1"		
200W	29,540 LM	149 LM/W	6	3.036	21.9"		
250W	36,040 LM	148 LM/W	7	3.444	24.7"		
300W	44,575 LM	147 LM/W	8	3.852	27.5"		

ZSL

FLEXIBLE LED POST TOP LUMINAIRE

**HEAVY-DUTY, IP-66 RATED HOUSING**

The ZSL is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZSL to meet a wide-range of project requirements

EASY TO INSTALL MOUNTING HARDWARE

The ZSL comes standard with an Integral Slip Fitter engineered to be installed on a 2.375" Diameter Pole

120-277V STANDARD**PRODUCT APPLICATIONS**

Parking Lots Playgrounds
Walkways Parks & Recreational Fields
Streetscapes
Plazas


ORDERING GUIDE

Sample Part # ZSL - 100W - 40K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTICS	HOUSING COLOR	OPTIONS & ACCESSORIES
ZSL					
	60W	30K 3000K - WARM WHITE	T1 TYPE I	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	100W	40K 4000K - NEUTRAL WHITE	T2 TYPE II	WH WHITE	PC2 208/277V PHOTOCELL
	120W	50K 5000K - COOL WHITE	T3 TYPE III	BL BLACK	MS MOTION SENSOR
	150W	57K 5700K - DAYLIGHT	T4 TYPE IV	SL SILVER	D1 0-10V DIMMING
	200W		20D TYPE V - 20° BEAM ANGLE		D2 STEP DIMMING
	250W		40D TYPE V - 40° BEAM ANGLE		NC1 NETWORK CONTROLS FOR ZIGBEE
	300W		80D TYPE V - 80° BEAM ANGLE		HS HOUSE-SIDE SHIELD
			170D TYPE V - 170° BEAM ANGLE		WG PROTECTIVE WIRE GUARD
					V1* 480/347V INPUT (120-277V STANDARD)
					*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

WATTAGE	DELIVERED LUMENS	EFFICACY	MODULES	EPA	X: WIDTH
60W	8,880 LM	148 LM/W	2	1.884	10.7"
100W	14,390 LM	148 LM/W	3	2.292	13.5"
120W	17,770 LM	149 LM/W	4	2.712	16.3"
150W	22,050 LM	148 LM/W	5	3.12	19.1"
200W	29,540 LM	149 LM/W	6	3.528	21.9"
250W	36,040 LM	148 LM/W	7	3.948	24.7"
300W	44,575 LM	147 LM/W	8	4.356	27.5"

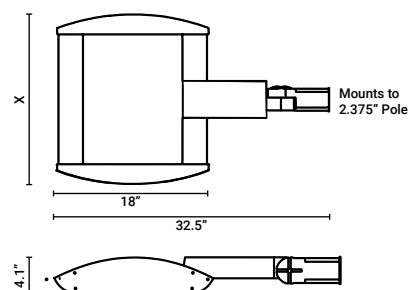PRODUCT DIMENSIONS

ZHB

FLEXIBLE LED HIGH BAY LUMINAIRE



HEAVY-DUTY, IP-66 RATED HOUSING

The ZHB is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZHB to meet a wide-range of project requirements

EASY TO INSTALL MOUNTING HARDWARE

The ZHB comes standard with a Eye-Hook Mounting Bracket engineered to be installed within a variety of High-Bay Applications; 12" & 18" Pendant Mounts are available as an option

120-277V STANDARD

PRODUCT APPLICATIONS

Warehouses
Industrial Buildings
Shipping Centers

ORDERING GUIDE


Sample Part # ZHB - 100W - 41K - BZ - MS - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTICS	HOUSING COLOR	OPTIONS & ACCESSORIES
ZHB					
	60W	30K 3000K - WARM WHITE	T1 TYPE I	BZ BRONZE (STANDARD)	MS MOTION SENSOR
	100W	40K 4000K - NEUTRAL WHITE	T2 TYPE II	WH WHITE	D1 0-10V DIMMING
	120W	50K 5000K - COOL WHITE	T3 TYPE III	BL BLACK	D2 STEP DIMMING
	150W	57K 5700K - DAYLIGHT	T4 TYPE IV	SL SILVER	NC1 NETWORK CONTROLS FOR ZIGBEE
	200W		20D TYPE V - 20° BEAM ANGLE		WG PROTECTIVE WIRE GUARD
	250W		40D TYPE V - 40° BEAM ANGLE		P1 12" PENDANT MOUNT
	300W		80D TYPE V - 80° BEAM ANGLE		P2 18" PENDANT MOUNT
			170D TYPE V - 170° BEAM ANGLE		V1* 480/347V INPUT (120-277V STANDARD)
					*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

WATTAGE	DELIVERED LUMENS	EFFICACY	MODULES	X: WIDTH
60W	8,880 LM	148 LM/W	2	10.7"
100W	14,390 LM	148 LM/W	3	13.5"
120W	17,770 LM	149 LM/W	4	16.3"
150W	22,050 LM	148 LM/W	5	19.1"
200W	29,540 LM	149 LM/W	6	21.9"
250W	36,040 LM	148 LM/W	7	24.7"
300W	44,575 LM	147 LM/W	8	27.5"

PRODUCT DIMENSIONS

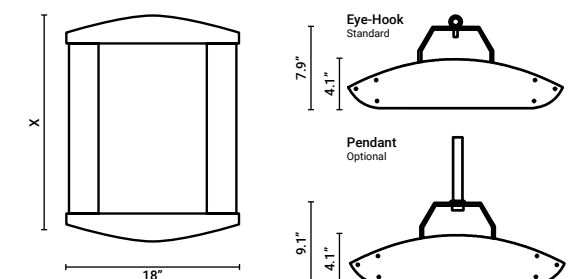



EXTERIOR LIGHTING

**A VERSATILE RANGE OF PRODUCTS IN
BOTH CLASSIC AND MODERN DESIGN**



Wallpack
Canopy & Garage
Floodlight
Area & Post Top

PARAFLEX

// WALLPACK

WP390

LED WALLPACK LUMINAIRE



SINGLE BAR VERSION

HEAVY-DUTY, 360° ADJUSTABLE HOUSING

Die Cast Aluminum Housing with Durable, Dark Bronze Powder Coat Finish, and Polycarbonate Lens

IP-65 RATED WET LOCATION RATED

Engineered and Constructed for Exterior Environments

DLC PREMIUM

The WP390 Meets the Highest Classification of Efficacy and Lumen Maintenance

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances Bridges
Walkways Catwalks
Tunnels Stairwells
Loading Docks

ORDERING GUIDE


Sample Part # WP390 - 60W - 50K - BZ

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
WP390	25W SINGLE BAR VERSION 40W SINGLE BAR VERSION 60W DOUBLE BAR VERSION 80W DOUBLE BAR VERSION	40K 4100K - NEUTRAL WHITE 50K 5000K - COOL WHITE	BZ BRONZE (STANDARD)	PC3 120V PENCIL TYPE PHOTOCELL


PRODUCT SPECIFICATIONS

WATTAGE	CCT	DELIVERED LUMENS	EFFICACY	CRI
25W	4000K	3,325 LM	127 LM/W	>70
25W	5000K	3,280 LM	130 LM/W	>70
40W	4000K	5,238 LM	126 LM/W	>70
40W	5000K	5,131 LM	128 LM/W	>70
60W	4000K	7,809 LM	129 LM/W	>70
60W	5000K	7,854 LM	130 LM/W	>70
80W	4000K	10,598 LM	133 LM/W	>70
80W	5000K	10,598 LM	133 LM/W	>70

25-40W SINGLE BAR PRODUCT DIMENSIONS



60-80W DOUBLE BAR PRODUCT DIMENSIONS

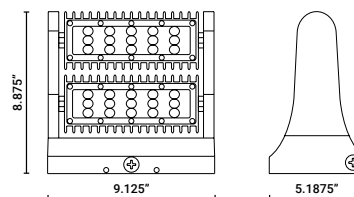

WP290

LED WALLPACK LUMINAIRE



COMPACT, DURABLE HOUSING

The WP290 is a Small Wallpack with a Die Cast Aluminum Housing and Polycarbonate Lens

WET LOCATION, IP-65 RATED

Seamless Gasket Engineered to Prevent Leaks and Provide Installation within Exterior Environments

INTEGRAL PHOTOCELL

The WP290 was Engineered with a Integral Button Photocell

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances	Bridges
Walkways	Catwalks
Tunnels	Stairwells
Loading Docks	Building Exteriors

ORDERING GUIDE

Sample Part # WP290 - 20W - 50K - BZ - PC

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
WP290	20W	30K 3000K - WARM WHITE* 50K 5000K - COOL WHITE	BZ BRONZE (STANDARD)	PC 120V-277V BUTTON TYPE PHOTOCELL
*NOT DLC LISTED				


PRODUCT SPECIFICATIONS

WATTAGE	CCT	DELIVERED LUMENS	EFFICACY	CRI
20W	3000K	2,381 LM	121 LM/W	>80
20W	5000K	2,472 LM	126 LM/W	>80

DLC LISTINGS

WP290 - 20W - 50K - BZ - PC

PRODUCT DIMENSIONS

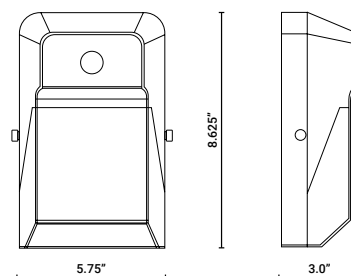

DCSLM

LOW-PROFILE LED WALLPACK LUMINAIRE



LOW PROFILE, IP-65 RATED HOUSING

The Compact Housing is constructed with a Die Cast Aluminum Body and Heat and Impact Resistant Glass

WET LOCATION RATED

Engineered and Constructed for Exterior Environments

ADJUSTABLE BEAM ANGLE

The DCSLM provides a Customizable Beam that adjusts from Full Cut-Off to 65° to provide the right angle of light for your project

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances	Bridges
Walkways	Catwalks
Tunnels	Stairwells
Loading Docks	

ORDERING GUIDE

Sample Part # DCSLM - 50W - 50K - BZ - PC1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DCSLM	12W 28W 50W 80W 120W	30K 3000K - WARM WHITE 40K 4100K - NEUTRAL WHITE 50K 5000K - COOL WHITE	BZ BRONZE (STANDARD)	PC1 120V BUTTON TYPE PHOTOCELL PC2 208/277V PHOTOCELL PC3 120V PENCIL TYPE PHOTOCELL

PRODUCT SPECIFICATIONS

WATTAGE	CCT	DELIVERED LUMENS	EFFICACY	CRI	12W PRODUCT DIMENSIONS	28-50W PRODUCT DIMENSIONS
12W	3000K	1,211 LM	99 LM/W	>80		
12W	4000K	1,285 LM	109 LM/W	>80		
12W	5000K	1,321 LM	111 LM/W	>80		
28W	3000K	3,099 LM	111 LM/W	>80		
28W	4000K	3,239 LM	116 LM/W	>80		
28W	5000K	3,298 LM	120 LM/W	>80		
50W	3000K	4,920 LM	102 LM/W	>80		
50W	4000K	5,193 LM	105 LM/W	>80		
50W	5000K	5,287 LM	108 LM/W	>80		
80W	3000K	8,820 LM	110 LM/W	>80		
80W	4000K	9,056 LM	112 LM/W	>80		
80W	5000K	9,241 LM	115 LM/W	>80		
120W	3000K	13,106 LM	106 LM/W	>80		
120W	4000K	13,796 LM	111 LM/W	>80		
120W	5000K	14,227 LM	116 LM/W	>80		

DC150-90

CUT-OFF LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC150-90 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC150-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances Bridges
Walkways Catwalks
Tunnels Stairwells
Loading Docks

ORDERING GUIDE


Sample Part # DC150-90 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC150-90				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING
		55K 5500K - DAYLIGHT		EM EMERGENCY BATTERY PACK
				V1* 480/347V INPUT (120-277V STANDARD)
				*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90

PRODUCT DIMENSIONS

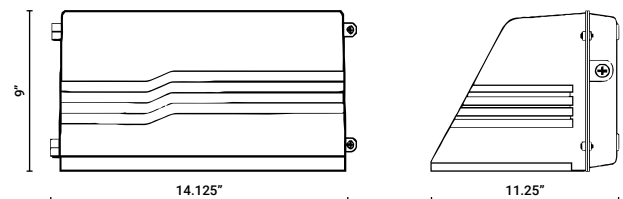

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DC200-90

CUT-OFF LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC200-90 is a Large 18" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC200-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances Bridges
Walkways Catwalks
Tunnels Stairwells
Loading Docks

ORDERING GUIDE


Sample Part # DC200-90 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC200-90				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING
	72W	55K 5500K - DAYLIGHT		EM EMERGENCY BATTERY PACK
	84W			V1* 480/347V INPUT (120-277V STANDARD)
	96W			*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.95
96W	92.10	5000K	12,083	131.19

PRODUCT DIMENSIONS

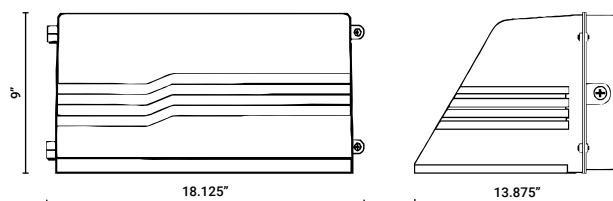

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DCST

CUT-OFF LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



FULL CUT-OFF, HEAVY-DUTY HOUSING

The DCST is a 14" Trapezoid Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DCST can be Directly Mounted over an Existing 4" Outlet Box with a 4" x 4" Gasketed Wall Plate

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances	Bridges
Walkways	Catwalks
Tunnels	Stairwells
Loading Docks	

ORDERING GUIDE


Sample Part # DCST - 12W - 35K - BZ - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DCST				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	MS MOTION SENSOR
	24W	30K 3000K - WARM WHITE	WH WHITE	D1 0-10V DIMMING
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	D2 STEP DIMMING
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	EM EMERGENCY BATTERY PACK
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	V1* 480/347V INPUT (120-277V STANDARD)
		55K 5500K - DAYLIGHT		*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90

PRODUCT DIMENSIONS

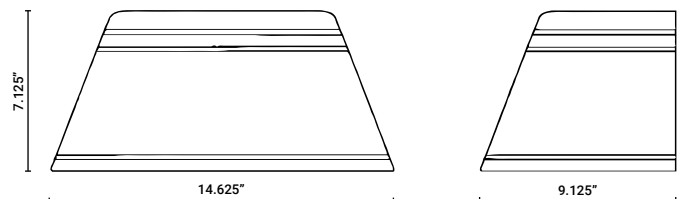

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DC102

LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



COMPACT, HEAVY-DUTY HOUSING

The DC102 is a Small 9" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC102 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances	Bridges
Walkways	Catwalks
Tunnels	Stairwells
Loading Docks	Building Exteriors

ORDERING GUIDE


Sample Part # DC102 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC102				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
		40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
		50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING
		55K 5500K - DAYLIGHT		V1* 480/347V INPUT (120-277V STANDARD)
				*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21

PRODUCT DIMENSIONS

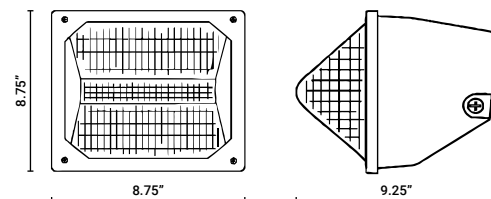

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DC150

LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



HEAVY-DUTY HOUSING

The DC150 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC150 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances Bridges
Walkways Catwalks
Tunnels Stairwells
Loading Docks

ORDERING GUIDE


Sample Part # DC150 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC150				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING
		55K 5500K - DAYLIGHT		EM EMERGENCY BATTERY PACK
				V1* 480/347V INPUT (120-277V STANDARD)
				*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90

PRODUCT DIMENSIONS

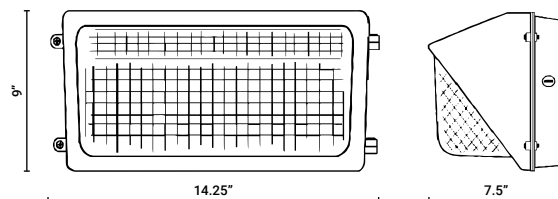

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DC200

LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



LARGE, HEAVY-DUTY HOUSING

The DC200 is a Large 18" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC200 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances Bridges
Walkways Catwalks
Tunnels Stairwells
Loading Docks

ORDERING GUIDE


Sample Part # DC200 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC200				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING
	72W	55K 5500K - DAYLIGHT		EM EMERGENCY BATTERY PACK
	84W			V1* 480/347V INPUT (120-277V STANDARD)
	96W			*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.95
96W	92.10	5000K	12,083	131.19

PRODUCT DIMENSIONS

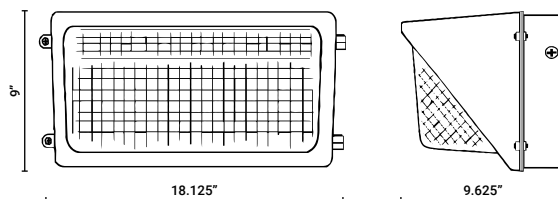

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DCSHM

ROUND LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



FULL CUT-OFF, HEAVY-DUTY HOUSING

The DCSHM is an 18" Half-Moon Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

4" x 4" Gasketed Wall Plate allows the Installer to Quickly Mount and Wire the Fixture without Opening the Housing

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances Bridges
Walkways Catwalks
Tunnels Stairwells
Loading Docks

ORDERING GUIDE


Sample Part # DCSHM - 12W - 35K - BZ - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DCSHM				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	MS MOTION SENSOR
	24W	30K 3000K - WARM WHITE	WH WHITE	D1 0-10V DIMMING
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	D2 STEP DIMMING
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	EM EMERGENCY BATTERY PACK
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	V1* 480/347V INPUT (120-277V STANDARD)
		55K 5500K - DAYLIGHT		*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90

PRODUCT DIMENSIONS

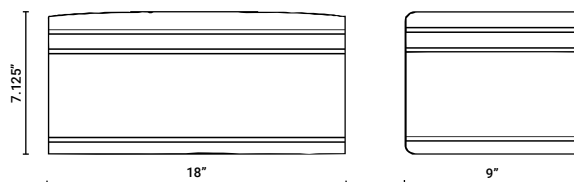

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DCSHM-UD

ROUND UP/DOWN LED WALLPACK LUMINAIRE



AVAILABLE IN QUICK SHIP



UPLIGHT/DOWNLIGHT, HEAVY-DUTY HOUSING

The DCSHM is an 18" Half-Moon Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens That Provides a Variety of Uplight and Downlight Options

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

4" x 4" Gasketed Wall Plate allows the Installer to Quickly Mount and Wire the Fixture without Opening the Housing

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances Bridges
Walkways Catwalks
Tunnels Stairwells
Loading Docks

ORDERING GUIDE


Sample Part # DCSHM-UD - 12W - 24W - 35K - BZ - D1

MODEL	WATTAGE UP	WATTAGE DOWN	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DCSHM-UD	12W				
		12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	MS MOTION SENSOR
		24W	30K 3000K - WARM WHITE	WH WHITE	D1 0-10V DIMMING
		36W	35K 3500K - NEUTRAL WHITE	BL BLACK	D2 STEP DIMMING
		48W	40K 4000K - NEUTRAL WHITE	SL SILVER	EM EMERGENCY BATTERY PACK
		60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	V1* 480/347V INPUT (120-277V STANDARD)
			55K 5500K - DAYLIGHT		*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90

PRODUCT DIMENSIONS

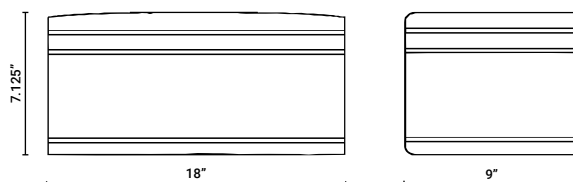

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

ZWP-28

LED WALLPACK LUMINAIRE



HEAVY-DUTY, IP-66 RATED HOUSING

The ZWP-28 is constructed with a Die Cast Aluminum Body and Heat and Impact Resistant Glass to create a Heavy-Duty Housing

WET LOCATION RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING HARDWARE

The ZWP-28 comes standard with a Removable Wall Mount Bracket engineered to be installed within a variety of Exterior Applications

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances	Bridges
Walkways	Catwalks
Tunnels	Stairwells
Loading Docks	

ORDERING GUIDE


Sample Part # ZWP - 28W - 50K - SL - DSA

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
ZWP	28W	50K	SL	
	28W	50K 5000K - COOL WHITE	SL SILVER	DSA DARK SKY ADAPTER TR TRUNNION MOUNT TC TOP COVER

PRODUCT SPECIFICATIONS

WATTAGE	DELIVERED LUMENS	EFFICACY	CRI	EPA
28W	3,495 LM	126 LM/W	>70	.323

28W PRODUCT DIMENSIONS

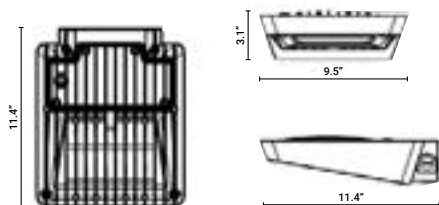

ZWM

FLEXIBLE LED WALL MOUNT LUMINAIRE



HEAVY-DUTY, IP-66 RATED HOUSING

The ZWM is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZWM to meet a wide-range of project requirements

EASY TO INSTALL MOUNTING HARDWARE

The ZWM comes standard with a Wall Mount Bracket engineered to be installed within a variety of Exterior Applications

120-277V STANDARD

PRODUCT APPLICATIONS

Parking Lots Bridges
Walkways Catwalks
Tunnels
Loading Docks

ORDERING GUIDE


Sample Part # ZWM - 100W - 40K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTICS	HOUSING COLOR	OPTIONS & ACCESSORIES
ZWM					
	60W	30K 3000K - WARM WHITE	T1 TYPE I	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	100W	40K 4000K - NEUTRAL WHITE	T2 TYPE II	WH WHITE	PC2 208/277V PHOTOCELL
	120W	50K 5000K - COOL WHITE	T3 TYPE III	BL BLACK	MS MOTION SENSOR
	150W	57K 5700K - DAYLIGHT	T4 TYPE IV	SL SILVER	D1 0-10V DIMMING
	200W		20D TYPE V - 20° BEAM ANGLE		D2 STEP DIMMING
	250W		40D TYPE V - 40° BEAM ANGLE		NC1 NETWORK CONTROLS FOR ZIGBEE
	300W		80D TYPE V - 80° BEAM ANGLE		HS HOUSE-SIDE SHIELD
			170D TYPE V - 170° BEAM ANGLE		WG PROTECTIVE WIRE GUARD
					V1* 480/347V INPUT (120-277V STANDARD)
					*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

WATTAGE	DELIVERED LUMENS	EFFICACY	MODULES	X: WIDTH
60W	8,880 LM	148 LM/W	2	10.7"
100W	14,390 LM	148 LM/W	3	13.5"
120W	17,770 LM	149 LM/W	4	16.3"
150W	22,050 LM	148 LM/W	5	19.1"
200W	29,540 LM	149 LM/W	6	21.9"
250W	36,040 LM	148 LM/W	7	24.7"
300W	44,575 LM	147 LM/W	8	27.5"

PRODUCT DIMENSIONS



// CANOPY & GARAGE

CL390

LED CANOPY LUMINAIRE



HEAVY-DUTY, 360° ADJUSTABLE HOUSING

Die Cast Aluminum Housing with Durable, Dark Bronze Powder Coat Finish, and Polycarbonate Lens

IP-65 RATED WET LOCATION RATED

Engineered and Constructed for Exterior Environments

MOUNTING PLATE

The CL390 Includes a Mounting Plate for Easy Mounting Over a Junction Box

120-277V STANDARD & 0-10V DIMMING STANDARD

PRODUCT APPLICATIONS

Parking Garage	Bridges
Walkways	Catwalks
Tunnels	Stairwells
Storage Areas	

ORDERING GUIDE

Sample Part # CL390 - 45W - 50K - BZ - PC2

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CL390	45W 80W	50K 5000K - COOL WHITE	BZ BRONZE (STANDARD)	PC1 120V BUTTON TYPE PHOTOCELL PC2 208/277V PHOTOCELL PC3 120V PENCIL TYPE PHOTOCELL

PRODUCT SPECIFICATIONS

WATTAGE	CCT	DELIVERED LUMENS	EFFICACY	CRI
45W	5000K	4,948 LM	112 LM/W	>80
80W	5000K	9,548 LM	120 LM/W	>80

HOUSING CONSTRUCTION

Heavy Duty Die Cast Aluminum Housing Gasketed to Provide IP65 rating when Paired with Lens

LENS CONSTRUCTION

Durable UV- and Heat Resistant Polycarbonate

DIMENSIONS

45W: 10"x10"x4"
80W: 14"x14"x4"

FINISH

High Quality Dark Bronze Powder Coat Rated for Outdoor Locations

VOLTAGE

120-277V Input Standard. THD <20% Power Factor >90%

CERTIFICATIONS

cULus conforms to UL 1598 and 8750 conforms to CSA 22.2 & DLC Standard Listed. Complies with FCC (Part 15, Class B). Complies with EN61000-4-5, surge immunity test (1kV).

OPERATING TEMPERATURE

Wet Location Listed. Suitable for -30C to 40C ambient temperatures

LUMEN MAINTENANCE

L70 rating of over 60,000 hours

WARRANTY

Standard 5-Year Warranty

CV203

LED CANOPY LUMINAIRE



AVAILABLE IN QUICK SHIP



COMPACT, HEAVY-DUTY HOUSING

The CV203 is a 9" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The CV203 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

120-277V STANDARD

PRODUCT APPLICATIONS

Building Canopy Storage Facilities
Parking Garages Gas Stations
Tunnels

ORDERING GUIDE


Sample Part # CV203 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CV203				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
		40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
		50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING
		55K 5500K - DAYLIGHT		V1* 480/347V INPUT (120-277V STANDARD)
				*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21

PRODUCT DIMENSIONS

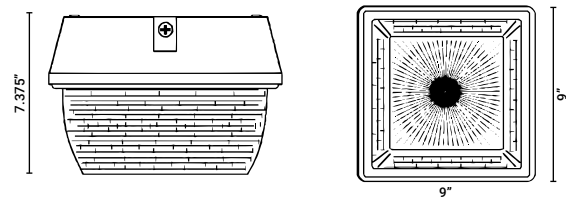

POWER

POWER FACTOR >90 - THD <20

CV303

LED CANOPY LUMINAIRE



AVAILABLE IN QUICK SHIP



COMPACT, HEAVY-DUTY HOUSING

The CV303 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The CV303 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

120-277V STANDARD

PRODUCT APPLICATIONS

Building Canopy Storage Facilities
Parking Garages Gas Stations
Tunnels

ORDERING GUIDE


Sample Part # CV303 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CV303				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING
	72W	55K 5500K - DAYLIGHT		EM EMERGENCY BATTERY PACK
				V1* 480/347V INPUT (120-277V STANDARD)
				*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05

PRODUCT DIMENSIONS

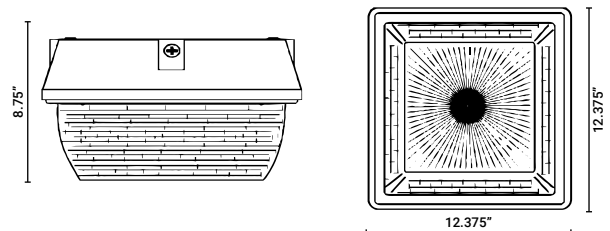

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

CV304

LED CANOPY LUMINAIRE



AVAILABLE IN QUICK SHIP



COMPACT, HEAVY-DUTY HOUSING

The CV304 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The CV304 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

120-277V STANDARD

PRODUCT APPLICATIONS

Building Canopy Storage Facilities
Parking Garages Gas Stations
Tunnels

ORDERING GUIDE


Sample Part # CV304 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CV304				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING
	72W	55K 5500K - DAYLIGHT		EM EMERGENCY BATTERY PACK
				V1* 480/347V INPUT (120-277V STANDARD)
				*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05

PRODUCT DIMENSIONS

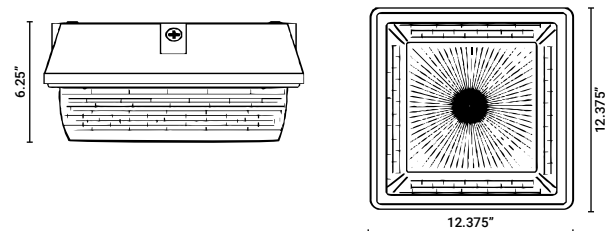

POWER

POWER FACTOR >90 - THD <20

CV15G

LED CANOPY LUMINAIRE



AVAILABLE IN QUICK SHIP



COMPACT, HEAVY-DUTY HOUSING

The CV15G is a 15" Circular Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The CV15G can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

120-277V STANDARD

PRODUCT APPLICATIONS

Building Canopy Storage Facilities
Parking Garages Gas Stations
Tunnels

ORDERING GUIDE


Sample Part # CV15G - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CV15G				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING
	72W	55K 5500K - DAYLIGHT		EM EMERGENCY BATTERY PACK
	84W			V1* 480/347V INPUT (120-277V STANDARD)
	96W			*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.95
96W	92.10	5000K	12,083	131.19

PRODUCT DIMENSIONS

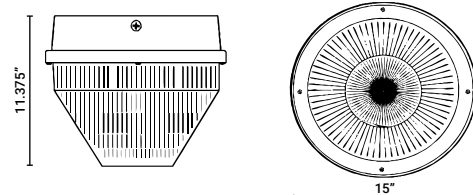

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

ZCL

FLEXIBLE LED CANOPY & GARAGE LUMINAIRE

**HEAVY-DUTY, IP-66 RATED HOUSING**

The ZCL is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZCL to meet a wide-range of project requirements

EASY TO INSTALL MOUNTING HARDWARE

The ZCL comes standard with a Removable Bracket engineered to be installed within a variety of Surface Mounting Applications

120-277V STANDARD**PRODUCT APPLICATIONS**

Building Canopy	Gas Stations
Parking Garages	Catwalks
Tunnels	Storage Facilities
Bridges	Concourses


ORDERING GUIDE

Sample Part # ZCL - 100W - 40K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTICS	HOUSING COLOR	OPTIONS & ACCESSORIES
ZCL					
	60W	30K 3000K - WARM WHITE	T1 TYPE I	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	100W	40K 4000K - NEUTRAL WHITE	T2 TYPE II	WH WHITE	PC2 208/277V PHOTOCELL
	120W	50K 5000K - COOL WHITE	T3 TYPE III	BL BLACK	MS MOTION SENSOR
	150W	57K 5700K - DAYLIGHT	T4 TYPE IV	SL SILVER	D1 0-10V DIMMING
	200W		20D TYPE V - 20° BEAM ANGLE		D2 STEP DIMMING
	250W		40D TYPE V - 40° BEAM ANGLE		NC1 NETWORK CONTROLS FOR ZIGBEE
	300W		80D TYPE V - 80° BEAM ANGLE		HS HOUSE-SIDE SHIELD
			170D TYPE V - 170° BEAM ANGLE		WG PROTECTIVE WIRE GUARD
					V1* 480/347V INPUT (120-277V STANDARD)
					*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

WATTAGE	DELIVERED LUMENS	EFFICACY	MODULES	X: WIDTH
60W	8,880 LM	148 LM/W	2	10.7"
100W	14,390 LM	148 LM/W	3	13.5"
120W	17,770 LM	149 LM/W	4	16.3"
150W	22,050 LM	148 LM/W	5	19.1"
200W	29,540 LM	149 LM/W	6	21.9"
250W	36,040 LM	148 LM/W	7	24.7"
300W	44,575 LM	147 LM/W	8	27.5"

PRODUCT DIMENSIONS

INTRODUCING THE ALL-NEW **CL390**



An efficient **LED canopy luminaire** perfect for

Parking Garages | Walkways | Tunnels
Stairwells | Catwalks | & More!



// FLOODLIGHT

FL290

BULLET LED FLOODLIGHT LUMINAIRE



28 WATT VERSION

HEAVY-DUTY, IP-65 RATED HOUSING

Die Cast Aluminum Housing with Durable, Dark Bronze Powder Coat Finish, and Polycarbonate Lens

WET LOCATION RATED

Engineered and Constructed for Exterior Environments

MULTIPLE MOUNTING OPTIONS

Multiple Mounting Options make the FL290 a Versatile Luminaire for Small Scale Flood Lighting Applications

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances Flag Poles
Walkways Signage
Landscape Security

ORDERING GUIDE


Sample Part # FL290 - 28W - 30D - 50K - BZ - KM

MODEL	WATTAGE	OPTICS	COLOR TEMPERATURE (CCT)	HOUSING COLOR	MOUNTING
FL290				BZ	
	15W	30D NARROW (30°) BEAM	30K 3000K - WARM WHITE	BZ BRONZE (STANDARD)	KM KNUCKLE MOUNT (STANDARD) NPS 1/2" THREADED-END
	28W		50K 5000K - COOL WHITE		SM SPIKE MOUNT
	42W	60D MEDIUM (60°) BEAM			CM CANOPY MOUNT


PRODUCT SPECIFICATIONS

WATTAGE	CCT	DELIVERED LUMENS	EFFICACY	CRI
15W	3000K	1,536 LM	107 LM/W	>80
15W	5000K	1,700 LM	113 LM/W	>80
28W	3000K	2,723 LM	106 LM/W	>80
28W	5000K	3,200 LM	114 LM/W	>80
42W	3000K	4,204 LM	107 LM/W	>80
42W	5000K	4,800 LM	114 LM/W	>80


15W PRODUCT DIMENSIONS



28W PRODUCT DIMENSIONS



42W PRODUCT DIMENSIONS



FL390

COMPACT LED FLOODLIGHT LUMINAIRE



30 WATT VERSION

HEAVY-DUTY, IP-65 RATED HOUSING

Die Cast Aluminum Housing with Durable, Dark Bronze Powder Coat Finish, and a Heat-Resistant Polycarbonate Lens

WET LOCATION RATED

Engineered and Constructed for Exterior Environments

MULTIPLE MOUNTING OPTIONS

Multiple Mounting Options make the FL390 a Versatile Luminaire for Small Scale Flood Lighting Applications

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances Flag Poles
Walkways Signage

ORDERING GUIDE


Sample Part # FL390 - 30W - 50K - T5 - YM - BZ - FS

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTICS	MOUNTING	HOUSING COLOR	OPTIONS & ACCESSORIES
FL390						
	15W	30K 3000K - WARM WHITE	T5 TYPE V	YM YOKE MOUNT (STANDARD)	BZ BRONZE (STANDARD)	WG WIRE GUARD
	30W	40K 4100K - NEUTRAL WHITE		KM KNUCKLE MOUNT NPS 1/2" THREADED-END		FS FULL GLARE SHIELD
	50W	50K 5000K - COOL WHITE				HS HALF GLARE SHIELD
						PC3 120V PENCIL TYPE PHOTOCELL


PRODUCT SPECIFICATIONS

WATTAGE	CCT	DELIVERED LUMENS	EFFICACY	CRI
15W	3000K	1,570 LM	103 LM/W	>80
15W	4000K	1,615 LM	111 LM/W	>80
15W	5000K	1,667 LM	111 LM/W	>80
30W	3000K	3,453 LM	117 LM/W	>80
30W	4000K	3,586 LM	121 LM/W	>80
30W	5000K	3,718 LM	126 LM/W	>80
50W	3000K	5,882 LM	119 LM/W	>80
50W	4000K	6,031 LM	123 LM/W	>80
50W	5000K	6,179 LM	126 LM/W	>80


15W PRODUCT DIMENSIONS



30W PRODUCT DIMENSIONS



50W PRODUCT DIMENSIONS

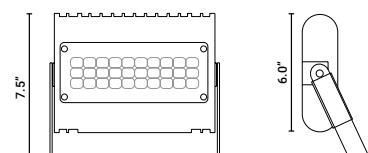

FL490

LARGE LED FLOODLIGHT LUMINAIRE



HEAVY-DUTY, IP-65 RATED HOUSING

Die Cast Aluminum Housing with a Durable, Dark Bronze Powder Coat Finish, and a Heat-Resistant Polycarbonate Lens

WET LOCATION RATED

Engineered and Constructed for Exterior Environments

MULTIPLE MOUNTING OPTIONS

Adjustable Trunnion Mount makes the FL490 a Versatile Luminaire for Medium & Large Scale Flood Lighting Applications

120-277V STANDARD & 0-10V DIMMING STANDARD

PRODUCT APPLICATIONS

Parking Lots	Playgrounds
Walkways	Parks & Recreational Fields
Buildings	Loading Docks
Signage	

ORDERING GUIDE


Sample Part # FL490 - 150W - 40K - T5 - SA - BZ - PC2

MODEL	WATTAGE*	COLOR TEMPERATURE (CCT)	OPTICS	MOUNTING	HOUSING COLOR	OPTIONS & ACCESSORIES
FL490	80W 100W 150W 220W 300W	40K 4100K - NEUTRAL WHITE 50K 5000K - COOL WHITE	T3 TYPE III T5 TYPE V (STAN)	TR TRUNNION MOUNT	BZ BRONZE (STANDARD)	WG WIRE GUARD FS FULL GLARE SHIELD HS HALF GLARE SHIELD PC2 208/277V PHOTOCELL PC3 120V PENCIL TYPE PHOTOCELL


*0-10V DIMMING STANDARD ON ALL WATTAGE OPTIONS EXCEPT 80W

PRODUCT SPECIFICATIONS

80W - 100W - 150W PRODUCT DIMENSIONS

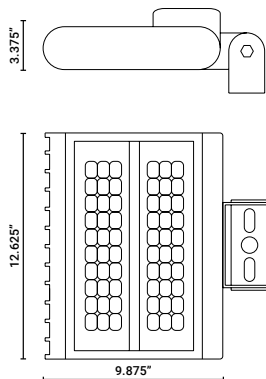

230W - 300W PRODUCT DIMENSIONS

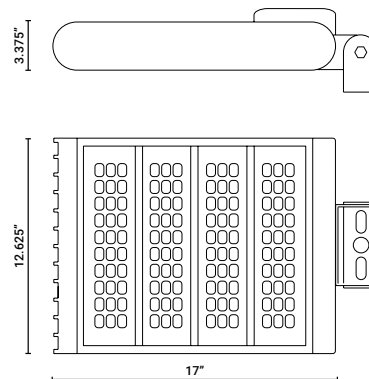

DC531

LED FLOODLIGHT LUMINAIRE



AVAILABLE IN QUICK SHIP



COMPACT, HEAVY-DUTY HOUSING

The DC531 is a Small Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC531 comes standard with an Integral 1/2" Male Threaded Mount with an Optional Post Top Fitter available

120-277V STANDARD

PRODUCT APPLICATIONS

Parking Lots
Walkways
Buildings
Signage
Playgrounds
Parks & Recreational Fields
Loading Docks

ORDERING GUIDE


Sample Part # DC531 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC531				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR (12W & 24W ONLY)
		40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
		50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING
		55K 5500K - DAYLIGHT		PT POST TOP FITTER
				V1* 480/347V INPUT (120-277V STANDARD)
				*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21

PRODUCT DIMENSIONS

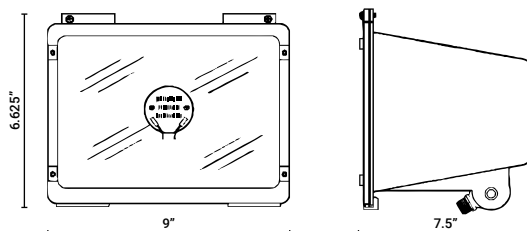

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DC545

LED FLOODLIGHT LUMINAIRE



AVAILABLE IN QUICK SHIP



COMPACT, HEAVY-DUTY HOUSING

The DC545 is a 9" Square Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC545 comes standard with an Integral 1/2" Male Threaded Mount with an Optional Post Top Fitter available

120-277V STANDARD

PRODUCT APPLICATIONS

Parking Lots
Walkways
Buildings
Signage
Playgrounds
Parks & Recreational Fields
Loading Docks

ORDERING GUIDE


Sample Part # DC545 - 12W - 35K - BZ - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC545				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	D1 0-10V DIMMING
	24W	30K 3000K - WARM WHITE	WH WHITE	D2 STEP DIMMING
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	PT POST TOP FITTER
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	V1 480/347V INPUT (120-277V STANDARD)
		50K 5000K - COOL WHITE	CC CUSTOM COLOR	
		55K 5500K - DAYLIGHT		

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38

PRODUCT DIMENSIONS

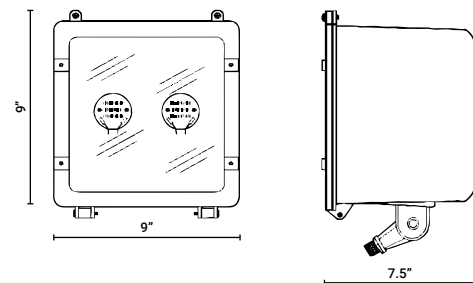

POWER

POWER FACTOR >90 - THD <20

DC400

LED FLOODLIGHT LUMINAIRE



AVAILABLE IN QUICK SHIP



COMPACT, HEAVY-DUTY HOUSING

The DC400 is a 16"x 10" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

VERSATILE MOUNTING OPTIONS

The DC400 is available with Three Mounting Options: Trunnion, Slip-Fitter and Straight Arm

120-277V STANDARD

PRODUCT APPLICATIONS

Parking Lots
Walkways
Buildings
Signage
Playgrounds
Parks & Recreational Fields
Loading Docks

ORDERING GUIDE


Sample Part # DC400 - 12W - 35K - BZ - SF - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	MOUNTING	OPTIONS & ACCESSORIES
DC400					
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	NA NONE (BY OTHERS)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	TR TRUNNION MOUNT	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	SF SLIP-FITTER	MS MOTION SENSOR
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	ST STRAIGHT ARM	D1 0-10V DIMMING
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR		D2 STEP DIMMING
	72W	55K 5500K - DAYLIGHT			EM EMERGENCY BATTERY PACK
	84W				V1* 480/347V INPUT (120-277V STANDARD)
	96W				*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.05

PRODUCT DIMENSIONS

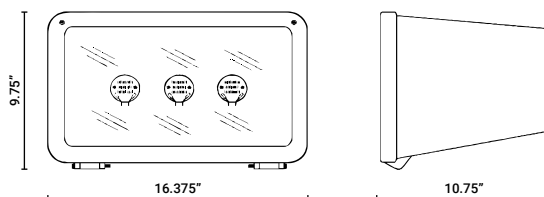

POWER

POWER FACTOR >90 - THD <20

DC560

LED FLOODLIGHT LUMINAIRE



AVAILABLE IN QUICK SHIP



COMPACT, HEAVY-DUTY HOUSING

The DC560 is a 12"x 8" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC560 comes standard with an Integral 1/2" Female Threaded Mount

120-277V STANDARD

PRODUCT APPLICATIONS

Parking Lots	Playgrounds
Walkways	Parks & Recreational Fields
Buildings	Loading Docks
Signage	

ORDERING GUIDE


Sample Part # DC560 - 12W - 35K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC560				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
		50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING
		55K 5500K - DAYLIGHT		V1* 480/347V INPUT (120-277V STANDARD)
				*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38

PRODUCT DIMENSIONS

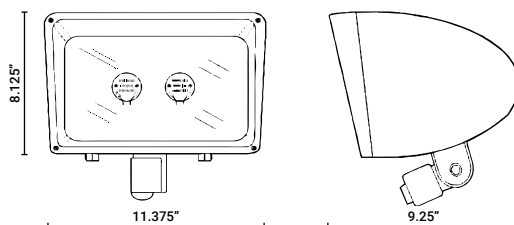

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DC570

LED FLOODLIGHT LUMINAIRE



AVAILABLE IN QUICK SHIP



COMPACT, HEAVY-DUTY HOUSING

The DC570 is a 16" Square Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

VERSATILE MOUNTING OPTIONS

The DC570 is available with Three Mounting Options: Trunnion, Slip-Fitter and Straight Arm

120-277V STANDARD

PRODUCT APPLICATIONS

Parking Lots	Playgrounds
Walkways	Parks & Recreational Fields
Buildings	Loading Docks
Signage	

ORDERING GUIDE


Sample Part # DC570 - 12W - 35K - BZ - TR - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	MOUNTING	OPTIONS & ACCESSORIES
DC570					
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	NA NONE (BY OTHERS)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	TR TRUNNION MOUNT	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	SF SLIP-FITTER	MS MOTION SENSOR
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	ST STRAIGHT ARM	D1 0-10V DIMMING
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR		D2 STEP DIMMING
	72W	55K 5500K - DAYLIGHT			EM EMERGENCY BATTERY PACK
	84W				V1* 480/347V INPUT (120-277V STANDARD)
	96W				*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.95
96W	92.10	5000K	12,083	131.19

PRODUCT DIMENSIONS

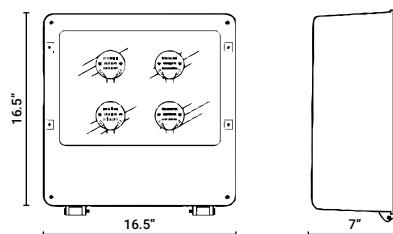

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

ZFL-28

COMPACT LED FLOODLIGHT LUMINAIRE



HEAVY-DUTY, IP-66 RATED HOUSING

The ZFL-28 is constructed with a Die Cast Aluminum Body and Heat and Impact Resistant Glass to create a Heavy-Duty Housing

WET LOCATION RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING HARDWARE

The ZFL-28 comes standard with a 160° Swivel Bracket engineered to be installed within a variety of Exterior Applications

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances	Bridges
Walkways	Catwalks
Tunnels	Stairwells
Loading Docks	Building Facades
Canopies	

ORDERING GUIDE


Sample Part # ZFL - 28W - 50K - SL - WB

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTICS
ZFL	28W	50K	SL	
	28W	50K 5000K - COOL WHITE	SL SILVER	WB WIDE (80°) BEAM

PRODUCT SPECIFICATIONS

WATTAGE	DELIVERED LUMENS	EFFICACY	CRI
28W	3,655 LM	135 LM/W	>70

28W PRODUCT DIMENSIONS

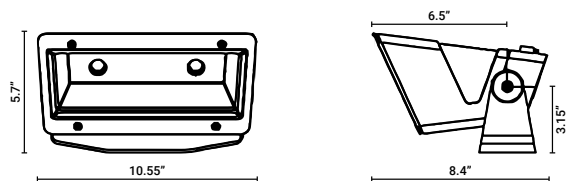

ZFL

FLEXIBLE LED FLOODLIGHT LUMINAIRE

**HEAVY-DUTY, IP-66 RATED HOUSING**

The ZFL is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZFL to meet a wide-range of project requirements

EASY TO INSTALL MOUNTING HARDWARE

The ZFL comes standard with a Yoke Mount Bracket engineered to be installed within a variety of Area & Flood Applications

120-277V STANDARD**PRODUCT APPLICATIONS**

Parking Lots	Playgrounds
Walkways	Parks & Recreational Fields
Buildings	Loading Docks
Signage	Flagpoles


ORDERING GUIDE

Sample Part # ZFL - 100W - 40K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTICS	HOUSING COLOR	OPTIONS & ACCESSORIES
ZFL					
	60W	30K 3000K - WARM WHITE	T1 TYPE I	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	100W	40K 4000K - NEUTRAL WHITE	T2 TYPE II	WH WHITE	PC2 208/277V PHOTOCELL
	120W	50K 5000K - COOL WHITE	T3 TYPE III	BL BLACK	MS MOTION SENSOR
	150W	57K 5700K - DAYLIGHT	T4 TYPE IV	SL SILVER	D1 0-10V DIMMING
	200W		20D TYPE V - 20° BEAM ANGLE		D2 STEP DIMMING
	250W		40D TYPE V - 40° BEAM ANGLE		NC1 NETWORK CONTROLS FOR ZIGBEE
	300W		80D TYPE V - 80° BEAM ANGLE		HS HOUSE-SIDE SHIELD
			170D TYPE V - 170° BEAM ANGLE		WG PROTECTIVE WIRE GUARD
					V1* 480/347V INPUT (120-277V STANDARD)
					*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

WATTAGE	DELIVERED LUMENS	EFFICACY	MODULES	EPA	X: WIDTH
60W	8,880 LM	148 LM/W	2	1.404	10.7"
100W	14,390 LM	148 LM/W	3	1.812	13.5"
120W	17,770 LM	149 LM/W	4	2.22	16.3"
150W	22,050 LM	148 LM/W	5	2.628	19.1"
200W	29,540 LM	149 LM/W	6	3.036	21.9"
250W	36,040 LM	148 LM/W	7	3.444	24.7"
300W	44,575 LM	147 LM/W	8	3.852	27.5"

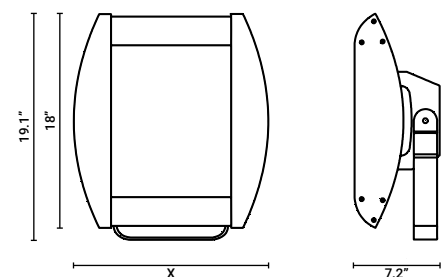PRODUCT DIMENSIONS

EXPERIENCE THE POWER OF THE **FL390**



Up to **50 WATTS** for complete illumination

Parking Lots | Walkways | Buildings

Signage | Parks | & More!



// AREA & POST TOP

AL490

LED AREA & POST TOP LUMINAIRE



150 WATT VERSION - SLIP FITTER MOUNT

HEAVY-DUTY, IP-65 RATED HOUSING

Die Cast Aluminum Housing with a Durable, Dark Bronze Powder Coat Finish, and a Heat-Resistant Polycarbonate Lens

WET LOCATION RATED

Engineered and Constructed for Exterior Environments

MULTIPLE MOUNTING OPTIONS

Multiple Mounting Options make the AL490 a Versatile Luminaire for Medium & Large Scale Lighting Applications

120-277V STANDARD & 0-10V DIMMING STANDARD

PRODUCT APPLICATIONS

Parking Lots	Playgrounds
Walkways	Parks & Recreational Fields
Buildings	Loading Docks
Signage	

ORDERING GUIDE


Sample Part # AL490 - 150W - 40K - T5 - SA - BZ - PC2

MODEL	WATTAGE*	COLOR TEMPERATURE (CCT)	OPTICS	MOUNTING	HOUSING COLOR	OPTIONS & ACCESSORIES
AL490	80W	40K 4100K - NEUTRAL WHITE	T3 TYPE III	SF SLIP-FITTER MOUNT	BZ BRONZE (STANDARD)	WG WIRE GUARD
	100W	50K 5000K - COOL WHITE	T5 TYPE V (STAN)	SA STRAIGHT-ARM MOUNT (STANDARD)		FS FULL GLARE SHIELD
	150W					HS HALF GLARE SHIELD
	220W					PC2 208/277V PHOTOCELL
	300W					PC3 120V PENCIL TYPE PHOTOCELL


*0-10V DIMMING STANDARD ON ALL WATTAGE OPTIONS EXCEPT 80W

PRODUCT SPECIFICATIONS

80W - 100W - 150W PRODUCT DIMENSIONS

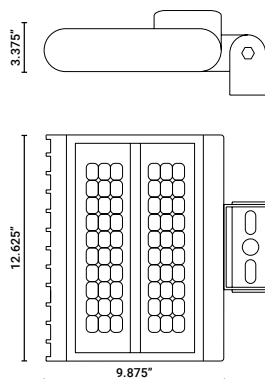

230W - 300W PRODUCT DIMENSIONS

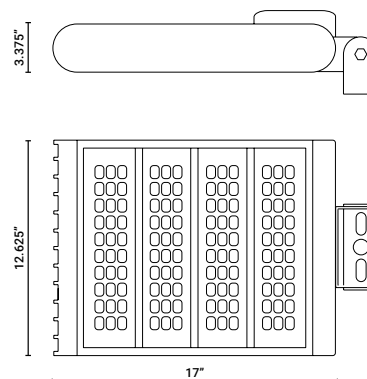

ZPT

FLEXIBLE LED POST TOP LUMINAIRE

**HEAVY-DUTY, IP-66 RATED HOUSING**

The ZPT is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZPT to meet a wide-range of project requirements

EASY TO INSTALL MOUNTING HARDWARE

The ZPT comes standard with a Pole Top Arm engineered to be installed on a 2.375" Diameter Pole

120-277V STANDARD**PRODUCT APPLICATIONS**

Parking Lots Playgrounds
Walkways Parks & Recreational Fields
Streetscapes
Plazas

ORDERING GUIDE

Sample Part # ZPT - 100W - 40K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTICS	HOUSING COLOR	OPTIONS & ACCESSORIES
ZPT					
	60W	30K 3000K - WARM WHITE	T1 TYPE I	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	100W	40K 4000K - NEUTRAL WHITE	T2 TYPE II	WH WHITE	PC2 208/277V PHOTOCELL
	120W	50K 5000K - COOL WHITE	T3 TYPE III	BL BLACK	MS MOTION SENSOR
	150W	57K 5700K - DAYLIGHT	T4 TYPE IV	SL SILVER	D1 0-10V DIMMING
	200W		20D TYPE V - 20° BEAM ANGLE		D2 STEP DIMMING
	250W		40D TYPE V - 40° BEAM ANGLE		NC1 NETWORK CONTROLS FOR ZIGBEE
	300W		80D TYPE V - 80° BEAM ANGLE		HS HOUSE-SIDE SHIELD
			170D TYPE V - 170° BEAM ANGLE		WG PROTECTIVE WIRE GUARD
					V1* 480/347V INPUT (120-277V STANDARD)
					*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

WATTAGE	DELIVERED LUMENS	EFFICACY	MODULES	EPA	X: WIDTH	PRODUCT DIMENSIONS	
60W	8,880 LM	148 LM/W	2	1.404	10.7"		
100W	14,390 LM	148 LM/W	3	1.812	13.5"		
120W	17,770 LM	149 LM/W	4	2.22	16.3"		
150W	22,050 LM	148 LM/W	5	2.628	19.1"		
200W	29,540 LM	149 LM/W	6	3.036	21.9"		
250W	36,040 LM	148 LM/W	7	3.444	24.7"		
300W	44,575 LM	147 LM/W	8	3.852	27.5"		

ZSL

FLEXIBLE LED POST TOP LUMINAIRE

**HEAVY-DUTY, IP-66 RATED HOUSING**

The ZSL is constructed with Die Cast Aluminum End-Caps and Individually sealed LED Modules to create a Heavy-Duty Housing

FLEXIBLE LIGHT OUTPUT CONFIGURATIONS

Extensive offering of Wattage, Optics and CCT options allow the ZSL to meet a wide-range of project requirements

EASY TO INSTALL MOUNTING HARDWARE

The ZSL comes standard with an Integral Slip Fitter engineered to be installed on a 2.375" Diameter Pole

120-277V STANDARD**PRODUCT APPLICATIONS**

Parking Lots Playgrounds
Walkways Parks & Recreational Fields
Streetscapes
Plazas

ORDERING GUIDE

Sample Part # ZSL - 100W - 40K - BZ - PC1 - D1

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	OPTICS	HOUSING COLOR	OPTIONS & ACCESSORIES
ZSL					
	60W	30K 3000K - WARM WHITE	T1 TYPE I	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	100W	40K 4000K - NEUTRAL WHITE	T2 TYPE II	WH WHITE	PC2 208/277V PHOTOCELL
	120W	50K 5000K - COOL WHITE	T3 TYPE III	BL BLACK	MS MOTION SENSOR
	150W	57K 5700K - DAYLIGHT	T4 TYPE IV	SL SILVER	D1 0-10V DIMMING
	200W		20D TYPE V - 20° BEAM ANGLE		D2 STEP DIMMING
	250W		40D TYPE V - 40° BEAM ANGLE		NC1 NETWORK CONTROLS FOR ZIGBEE
	300W		80D TYPE V - 80° BEAM ANGLE		HS HOUSE-SIDE SHIELD
			170D TYPE V - 170° BEAM ANGLE		WG PROTECTIVE WIRE GUARD
					V1* 480/347V INPUT (120-277V STANDARD)
					*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

PRODUCT SPECIFICATIONS

WATTAGE	DELIVERED LUMENS	EFFICACY	MODULES	EPA	X: WIDTH	PRODUCT DIMENSIONS
60W	8,880 LM	148 LM/W	2	1.884	10.7"	
100W	14,390 LM	148 LM/W	3	2.292	13.5"	
120W	17,770 LM	149 LM/W	4	2.712	16.3"	
150W	22,050 LM	148 LM/W	5	3.12	19.1"	
200W	29,540 LM	149 LM/W	6	3.528	21.9"	
250W	36,040 LM	148 LM/W	7	3.948	24.7"	
300W	44,575 LM	147 LM/W	8	4.356	27.5"	



QUICKSHIP ***PRODUCTS***

FULLY CUSTOMIZABLE LED LUMINAIRES
DELIVERED WHEN YOU NEED THEM.

1 Day | 1-5 pcs

3 Days | 5-25 pcs

1 Week | 25-100 pcs

PARAFLEX

DC102-QS

LED WALLPACK LUMINAIRE



COMPACT, HEAVY-DUTY HOUSING

The DC102 is a Small 9" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC102 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances	Bridges
Walkways	Catwalks
Tunnels	Stairwells
Loading Docks	Building Exteriors

ORDERING GUIDE

Sample Part # DC102 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC102	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR

QUANTITY


SHIPS

1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21

PRODUCT DIMENSIONS

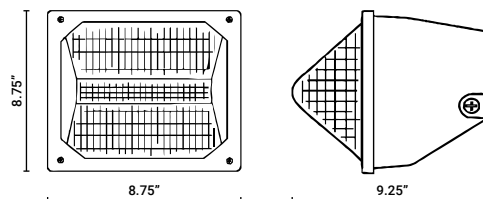

POWER

POWER FACTOR >90 - THD <20

DC150-QS

LED WALLPACK LUMINAIRE



QUICK SHIP

HEAVY-DUTY HOUSING

The DC150 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC150 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances Bridges
Walkways Catwalks
Tunnels Stairwells
Loading Docks

ORDERING GUIDE

Sample Part # DC150 - QS - 12W - 30K - BZ - PC1


MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC150	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR
		48W			
		60W			

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90

PRODUCT DIMENSIONS

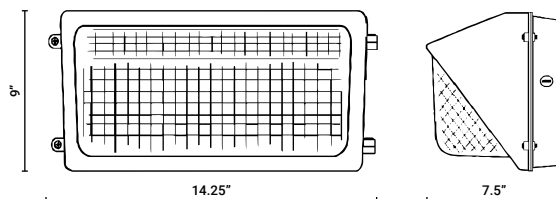

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DC200-QS

LED WALLPACK LUMINAIRE



LARGE, HEAVY-DUTY HOUSING

The DC200 is a Large 18" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC200 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances Bridges
Walkways Catwalks
Tunnels Stairwells
Loading Docks

ORDERING GUIDE

Sample Part # DC200 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC200	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR
		48W			EM EMERGENCY BATTERY PACK
		60W			
		72W			
		84W			
		96W			

QUANTITY


SHIPS

1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90

PRODUCT DIMENSIONS

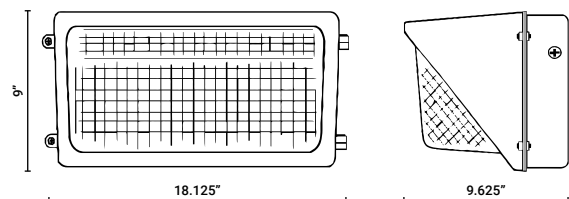

POWER

POWER FACTOR >90 - THD <20

DC150-90-QS

CUT-OFF LED WALLPACK LUMINAIRE



FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC150-90 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC150-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances Bridges
Walkways Catwalks
Tunnels Stairwells
Loading Docks

ORDERING GUIDE

Sample Part # DC150-90 - QS - 12W - 30K - BZ - PC1


MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC150-90	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR
		48W			
		60W			

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.95
96W	92.10	5000K	12,083	131.19

PRODUCT DIMENSIONS

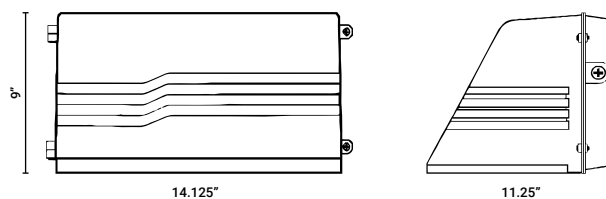

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DC200-90-QS

CUT-OFF LED WALLPACK LUMINAIRE



FULL CUT-OFF, HEAVY-DUTY HOUSING

The DC200-90 is a Large 18" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC200-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances Bridges
Walkways Catwalks
Tunnels Stairwells
Loading Docks

ORDERING GUIDE

Sample Part # DC200-90 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC200-90	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR
		48W			EM EMERGENCY BATTERY PACK
		60W			
		72W			
		84W			
		96W			

QUANTITY


SHIPS

1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.05

PRODUCT DIMENSIONS

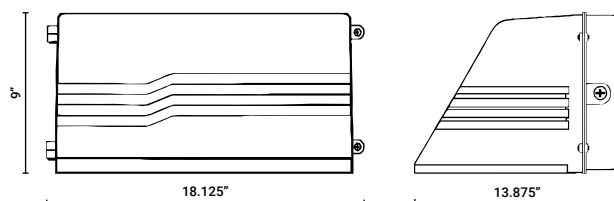

POWER

POWER FACTOR >90 - THD <20

DCSHM-QS

ROUND LED WALLPACK LUMINAIRE



FULL CUT-OFF, HEAVY-DUTY HOUSING

The DCSHM is an 18" Half-Moon Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

4" x 4" Gasketed Wall Plate allows the Installer to Quickly Mount and Wire the Fixture without Opening the Housing

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances	Bridges
Walkways	Catwalks
Tunnels	Stairwells
Loading Docks	

ORDERING GUIDE

Sample Part # DCSHM - QS - 12W - 30K - BZ - EM


MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DCSHM	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	EM EMERGENCY BATTERY PACK
		24W	40K 4000K - NEUTRAL WHITE		
		36W	50K 5000K - COOL WHITE		
		48W			
		60W			

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90

PRODUCT DIMENSIONS

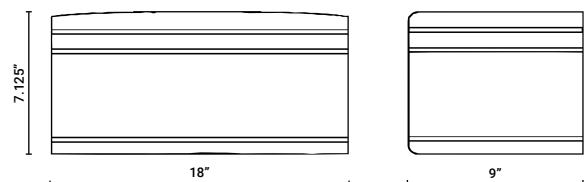

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DCST-QS

CUT-OFF LED WALLPACK LUMINAIRE



FULL CUT-OFF, HEAVY-DUTY HOUSING

The DCST is a 14" Trapezoid Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DCST can be Directly Mounted over an Existing 4" Outlet Box with a 4" x 4" Gasketed Wall Plate

120-277V STANDARD

PRODUCT APPLICATIONS

Building Entrances Bridges
Walkways Catwalks
Tunnels Stairwells
Loading Docks

ORDERING GUIDE

Sample Part # DCST - QS - 12W - 30K - BZ - EM


MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DCST	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	EM EMERGENCY BATTERY PACK
		24W	40K 4000K - NEUTRAL WHITE		
		36W	50K 5000K - COOL WHITE		
		48W			
		60W			

QUANTITY	SHIPS
1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90

PRODUCT DIMENSIONS

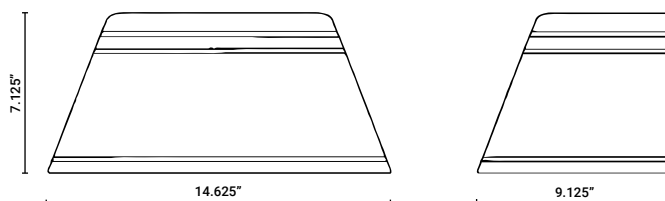

POWER

POWER FACTOR >90 - THD <20

CV303-QS

LED CANOPY LUMINAIRE



QUICK SHIP

COMPACT, HEAVY-DUTY HOUSING

The CV303 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The CV303 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

120-277V STANDARD

PRODUCT APPLICATIONS

Building Canopy Storage Facilities
Parking Garages Gas Stations
Tunnels

ORDERING GUIDE


Sample Part # CV303 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES								
CV303	QS			BZ									
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL								
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL								
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR								
		48W			EM EMERGENCY BATTERY PACK								
		60W											
		72W											
					<table><tr><th>QUANTITY</th><th>SHIPS</th></tr><tr><td>1-5 Pieces (Before 11AM EST)</td><td>Same Day</td></tr><tr><td>5-25 Pieces</td><td>3 Days</td></tr><tr><td>25-100 Pieces</td><td>1 Week</td></tr></table>	QUANTITY	SHIPS	1-5 Pieces (Before 11AM EST)	Same Day	5-25 Pieces	3 Days	25-100 Pieces	1 Week
QUANTITY	SHIPS												
1-5 Pieces (Before 11AM EST)	Same Day												
5-25 Pieces	3 Days												
25-100 Pieces	1 Week												

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05

PRODUCT DIMENSIONS

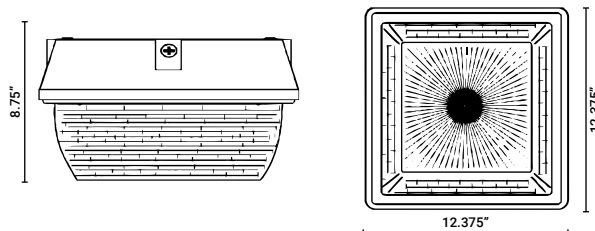

POWER

POWER FACTOR >90 - THD <20

CV304-QS

LED CANOPY LUMINAIRE



QUICK SHIP



COMPACT, HEAVY-DUTY HOUSING

The CV304 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The CV304 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

120-277V STANDARD

PRODUCT APPLICATIONS

Building Canopy Storage Facilities
Parking Garages Gas Stations
Tunnels

ORDERING GUIDE


Sample Part # CV304 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES								
CV304	QS			BZ									
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL								
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL								
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR								
		48W			EM EMERGENCY BATTERY PACK								
		60W											
		72W											
					<table><tr><th>QUANTITY</th><th>SHIPS</th></tr><tr><td>1-5 Pieces (Before 11AM EST)</td><td>Same Day</td></tr><tr><td>5-25 Pieces</td><td>3 Days</td></tr><tr><td>25-100 Pieces</td><td>1 Week</td></tr></table>	QUANTITY	SHIPS	1-5 Pieces (Before 11AM EST)	Same Day	5-25 Pieces	3 Days	25-100 Pieces	1 Week
QUANTITY	SHIPS												
1-5 Pieces (Before 11AM EST)	Same Day												
5-25 Pieces	3 Days												
25-100 Pieces	1 Week												

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05

PRODUCT DIMENSIONS

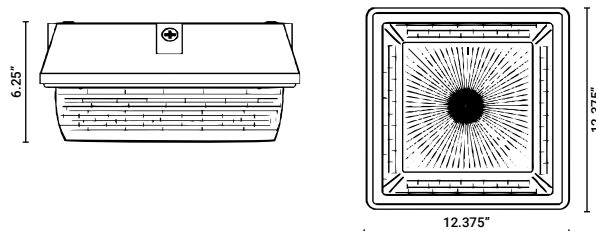

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

CV203-QS

LED CANOPY LUMINAIRE



COMPACT, HEAVY-DUTY HOUSING

The CV203 is a 9" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The CV203 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

120-277V STANDARD

PRODUCT APPLICATIONS

Building Canopy Storage Facilities
Parking Garages Gas Stations
Tunnels

ORDERING GUIDE

Sample Part # CV203 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
CV203	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		

QUANTITY


SHIPS

1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21

PRODUCT DIMENSIONS

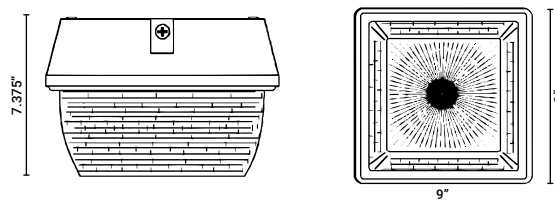

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

CV15G-QS

LED CANOPY LUMINAIRE



COMPACT, HEAVY-DUTY HOUSING

The CV15G is a 15" Circular Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The CV15G can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

120-277V STANDARD

PRODUCT APPLICATIONS

Building Canopy Storage Facilities
Parking Garages Gas Stations
Tunnels

ORDERING GUIDE


Sample Part # CV15G - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES	
CV15G	QS			BZ		
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL	
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL	
		36W	50K 5000K - COOL WHITE		MS MOTION SENSOR	
		48W			EM EMERGENCY BATTERY PACK	
		60W				
		72W				
		84W				
		96W				
					QUANTITY	SHIPS
					1-5 Pieces (Before 11AM EST)	Same Day
					5-25 Pieces	3 Days
					25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.05

PRODUCT DIMENSIONS

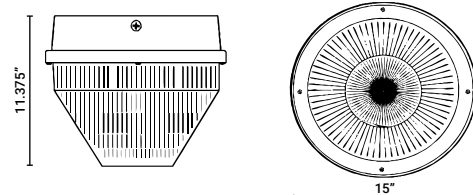

POWER

POWER FACTOR >90 - THD <20

DC545-QS

LED FLOODLIGHT LUMINAIRE



COMPACT, HEAVY-DUTY HOUSING

The DC545 is a 9" Square Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC545 comes standard with an Integral 1/2" Male Threaded Mount with an Optional Post Top Fitter available

120-277V STANDARD

PRODUCT APPLICATIONS

Parking Lots
Walkways
Buildings
Signage
Playgrounds
Parks & Recreational Fields
Loading Docks

ORDERING GUIDE

Sample Part # DC545 - QS - 12W - 30K - BZ - PT

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC545	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PT POST TOP FITTER
		24W	40K 4000K - NEUTRAL WHITE		
		36W	50K 5000K - COOL WHITE		
		48W			

QUANTITY


SHIPS

1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38

PRODUCT DIMENSIONS

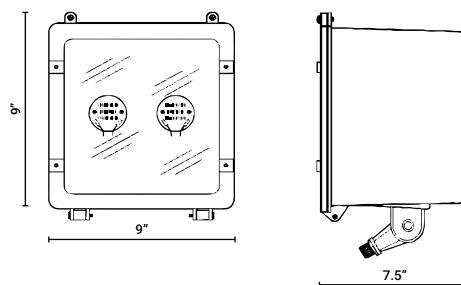

POWER

POWER FACTOR >90 - THD <20

DC560-QS

LED FLOODLIGHT LUMINAIRE



COMPACT, HEAVY-DUTY HOUSING

The DC560 is a 12"x 8" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC560 comes standard with an Integral 1/2" Female Threaded Mount

120-277V STANDARD

PRODUCT APPLICATIONS

Parking Lots	Playgrounds
Walkways	Parks & Recreational Fields
Buildings	Loading Docks
Signage	

ORDERING GUIDE

Sample Part # DC560 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC560	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		
		48W			

QUANTITY


SHIPS

1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38

PRODUCT DIMENSIONS

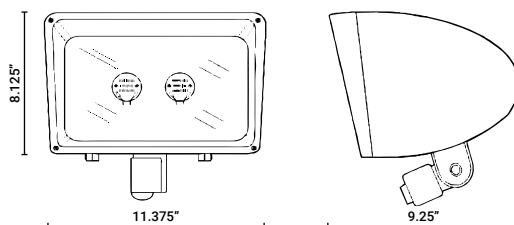

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DC531-QS

LED FLOODLIGHT LUMINAIRE



QUICK SHIP

COMPACT, HEAVY-DUTY HOUSING

The DC531 is a Small Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The DC531 comes standard with an Integral 1/2" Male Threaded Mount with an Optional Post Top Fitter available

120-277V STANDARD

PRODUCT APPLICATIONS

Parking Lots	Playgrounds
Walkways	Parks & Recreational Fields
Buildings	Loading Docks
Signage	

ORDERING GUIDE

Sample Part # DC531 - QS - 12W - 30K - BZ - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DC531	QS			BZ	
		12W	30K 3000K - WARM WHITE	BZ BRONZE	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		PT POST TOP FITTER

QUANTITY


SHIPS

1-5 Pieces (Before 11AM EST)	Same Day
5-25 Pieces	3 Days
25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21

PRODUCT DIMENSIONS

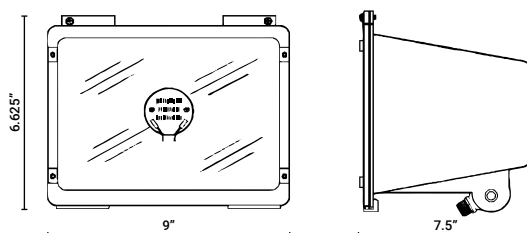

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DC400-QS

LED FLOODLIGHT LUMINAIRE



COMPACT, HEAVY-DUTY HOUSING

The DC400 is a 16"x 10" Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

VERSATILE MOUNTING OPTIONS

The DC400 is available with Three Mounting Options: Trunnion, Slip-Fitter and Straight Arm

120-277V STANDARD

PRODUCT APPLICATIONS

Parking Lots	Playgrounds
Walkways	Parks & Recreational Fields
Buildings	Loading Docks
Signage	

ORDERING GUIDE


Sample Part # DC400 - QS - 12W - 30K - BZ - NA - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	MOUNTING	OPTIONS & ACCESSORIES	
DC400	QS			BZ			
		12W	30K 3000K - WARM WHITE	BZ BRONZE	NA NONE (BY OTHERS)	PC1	120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		TR TRUNNION MOUNT	PC2	208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		SF SLIP-FITTER	MS	MOTION SENSOR
		48W			ST STRAIGHT ARM	EM	EMERGENCY BATTERY PACK
		60W					
		72W					
		84W					
		96W					
						QUANTITY	SHIPS
						1-5 Pieces (Before 11AM EST)	Same Day
						5-25 Pieces	3 Days
						25-100 Pieces	1 Week

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.05

PRODUCT DIMENSIONS

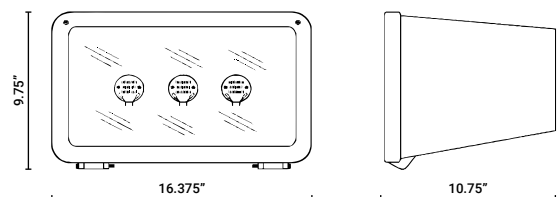

POWER

POWER FACTOR >90 - THD <20

DC570-QS

LED FLOODLIGHT LUMINAIRE



COMPACT, HEAVY-DUTY HOUSING

The DC570 is a 16" Square Floodlight Luminaire with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

VERSATILE MOUNTING OPTIONS

The DC570 is available with Three Mounting Options: Trunnion, Slip-Fitter and Straight Arm

120-277V STANDARD

PRODUCT APPLICATIONS

Parking Lots
Walkways
Buildings
Signage
Playgrounds
Parks & Recreational Fields
Loading Docks

ORDERING GUIDE


Sample Part # DC570 - QS - 12W - 30K - BZ - NA - PC1

MODEL	QUICK SHIP	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	MOUNTING	OPTIONS & ACCESSORIES
DC570	QS			BZ		
		12W	30K 3000K - WARM WHITE	BZ BRONZE	NA NONE (BY OTHERS)	PC1 120V PHOTOCELL
		24W	40K 4000K - NEUTRAL WHITE		TR TRUNNION MOUNT	PC2 208/277V PHOTOCELL
		36W	50K 5000K - COOL WHITE		SF SLIP-FITTER	MS MOTION SENSOR
		48W			ST STRAIGHT ARM	EM EMERGENCY BATTERY PACK
		60W				
		72W				
		84W				
		96W				

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05
84W	81.55	3000K	9,590	117.60
84W	81.55	4000K	10,070	123.48
84W	81.55	5000K	10,573	129.65
96W	92.10	3000K	10,960	119.00
96W	92.10	4000K	11,508	124.95
96W	92.10	5000K	12,083	131.19

PRODUCT DIMENSIONS

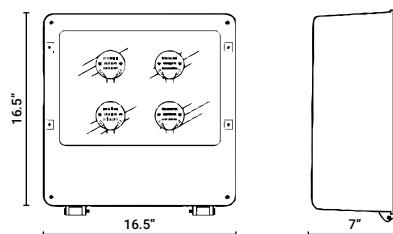

POWER

POWER FACTOR >90 - THD <20

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.



3 Luger Rd. #1

Denville, NJ 07834

PHONE // (973) 340-6040

WEB // www.paraflex.com