

ELECTRICAL DATA

| Series | Measurements | 5602-6L | | | 5602-14L | | | 5602-20L | | |
|--------------|-------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| | | 3500K | 4000K | 5000K | 3500K | 4000K | 5000K | 3500K | 4000K | 5000K |
| PFX-5602 | Lumens | 5965 | 6256 | 6105 | 13,673 | 14,327 | 13,956 | 20,380 | 21,447 | 20,590 |
| | Watts | 44 | 42 | 44 | 99 | 93 | 99 | 150 | 141 | 150 |
| | Efficacy | 136 | 148 | 138 | 137 | 156 | 141 | 136 | 152 | 137 |
| | Input Current (A) | 120V = 0.37A | 120V = 0.35A | 120V = 0.37A | 120V = 0.83A | 120V = 0.78A | 120V = 0.83A | 120V = 1.25A | 120V = 1.18A | 120V = 1.25A |
| 240V = 0.18A | | 240V = 0.18A | 240V = 0.18A | 240V = 0.41A | 240V = 0.39A | 240V = 0.41A | 240V = 0.63A | 240V = 0.59A | 240V = 0.63A | |
| 277V = 0.16A | | 277V = 0.15A | 277V = 0.16A | 277V = 0.36A | 277V = 0.34A | 277V = 0.36A | 277V = 0.54A | 277V = 0.51A | 277V = 0.54A | |

PHOTOMETRIC DATA




Luminaire Data

| | |
|-----------------------------|--------------------------------|
| Description | 4' Vapor Tight 6L 35K - KFS |
| Total Lumens | 5,965 |
| Input Wattage | 44 |
| Efficacy (lm/W) | 136 |
| Spacing Criterion (0-180°) | 1.28 |
| Spacing Criterion (90-270°) | 1.28 |

Zonal Lumen Summary

| Zone | Lumens | %Fixt |
|---------|--------|--------|
| 0-20° | 621 | 10.4% |
| 0-30° | 1,323 | 22.2% |
| 0-40° | 2,180 | 36.5% |
| 20-50° | 2,468 | 41.4% |
| 40-70° | 2,476 | 41.5% |
| 0-60° | 3,942 | 66.1% |
| 0-80° | 5,183 | 86.9% |
| 0-90° | 5,526 | 92.6% |
| 90-180° | 439 | 7.4% |
| 0-180° | 5,965 | 100.0% |

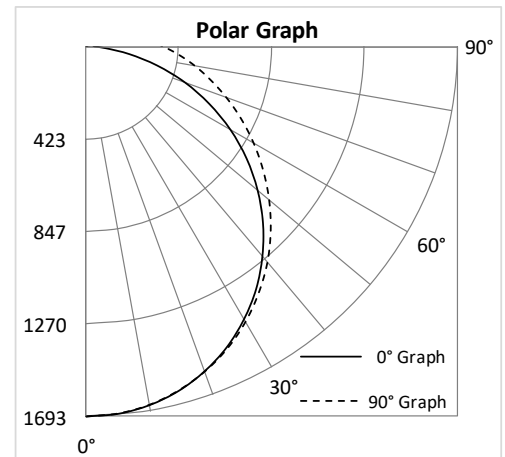


5602-14L-KFS

Luminaire Data

| | |
|-----------------------------|---------------------------------|
| Description | 4' Vapor Tight 14L 35K - KFS |
| Total Lumens | 13,673 |
| Input Wattage | 100 |
| Efficacy (lm/W) | 137 |
| Spacing Criterion (0-180°) | 1.32 |
| Spacing Criterion (90-270°) | 1.26 |

Zonal Lumen Summary

| Zone | Lumens | %Fixt |
|---------|--------|--------|
| 0-20° | 1,653 | 12.1% |
| 0-30° | 3,534 | 25.8% |
| 0-40° | 5,815 | 42.5% |
| 20-50° | 6,529 | 47.8% |
| 40-70° | 6,136 | 44.9% |
| 0-60° | 10,316 | 75.4% |
| 0-80° | 12,962 | 94.8% |
| 0-90° | 13,392 | 97.9% |
| 90-180° | 281 | 2.1% |
| 0-180° | 13,673 | 100.0% |

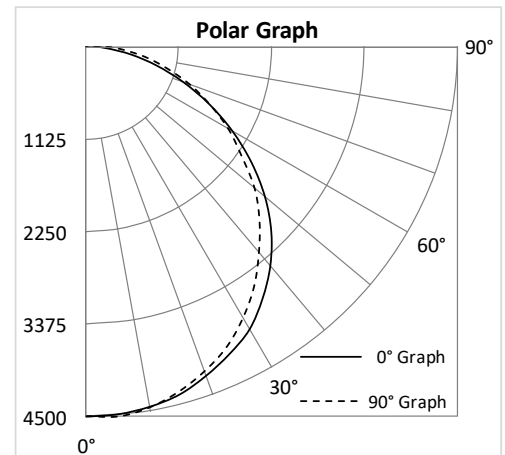

PHOTOMETRIC DATA

5602-20L-KFS

Luminaire Data

| | |
|--------------------------------|---------------------------------|
| Description | 4' Vapor Tight 20L 35K - KFS |
| Total Lumens | 20,380 |
| Input Wattage | 150 |
| Efficacy (lm/W) | 136 |
| Spacing Criterion (0-180°) | 1.32 |
| Spacing Criterion (90-270°) | 1.28 |

Zonal Lumen Summary

| Zone | Lumens | %Fixt |
|---------|--------|--------|
| 0-20° | 2,470 | 12.1% |
| 0-30° | 5,280 | 25.9% |
| 0-40° | 8,691 | 42.6% |
| 20-50° | 9,761 | 47.9% |
| 40-70° | 9,147 | 44.9% |
| 0-60° | 15,414 | 75.6% |
| 0-80° | 19,327 | 94.8% |
| 0-90° | 19,959 | 97.9% |
| 90-180° | 421 | 2.1% |
| 0-180° | 20,380 | 100.0% |

