

PFX-3128

LED SURFACE MOUNT LIGHT



Utilizing the latest generation of LED chips, this uniquely designed wall pack delivers a similar light output to a 250W metal halide but with only 1/3 energy consumption. Housing made of die-casting aluminum with reliable powder coating specifically for harsh outdoor environment. It is attractive in appearance and performance.

Optional Kelvin color* with adder.

AVAILABLE OPTIONS



Optional photo control

FEATURES

LISTING

UL and CUL listed for wet locations

HOUSING

Die-cast aluminum body

LEDS

New generation COB technology

FINISH

UV stabilized powder coated finish

LENS

Heat and impact resistant borosilicate glass

OPTIONS


Finish - Bronze. Color option with adder

SPECIFICATION


Example Model Number: PFX-3128E099UNV750T4

- Model No. ▶ PFX-3128
- System watts ▶ 099 = 99 W
- Input Voltage ▶ UNV = 120-277 V
- CRI ▶ 8 = 80 CRI
- CCT ▶ 50 = 5000K
- Light Distribution ▶ T4 = Type 4
- Lumens ▶ 12653 lm**
- Power ▶ 99 W
- Efficacy ▶ 127.65 lm/W

DIMENSIONS

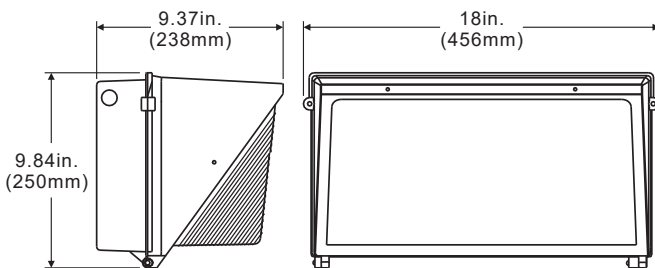

LINE DRAWING

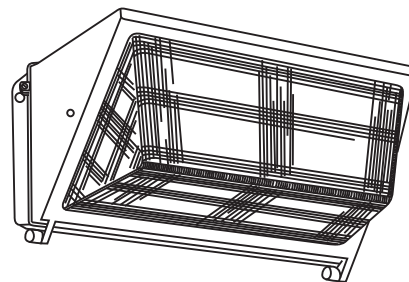

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.