



# PFX-3409

OUTDOOR BOLLARD  
COMMERCIAL LIGHTING

<b>Project:</b>	
<b>Type:</b>	
<b>Voltage :</b>	

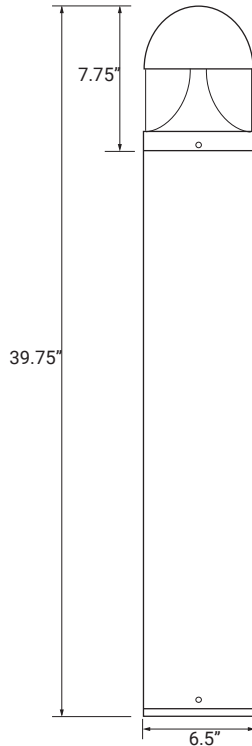


Paraflex Lighting's PFX-3409 Bollard adds a modern look to any pathway. This fixture is available LED and its industrial strength features make it ETL listed and suitable for wet locations. PFX-3409 is designed for low mounting in reinforced concrete (by others), hardware and template is included.



Anchor Bolt M10 x 6.7"  
(3 anchor bolts and template included)

## SPECIFICATIONS

- Powder Coated Finish
- Aluminum Housing
- Mounting Hardware Included
- Polycarbonate Lens
- Minimum Starting Temp -20°F
- ETL Listed for Wet Locations



## LED SOURCE OPTIONS

### LED MULTI-VOLT SYSTEM - L20

- 120-277V, 50/60Hz
- Estimated 50,000 Hrs L70
- Max 20kASurge Supression
- 3000K or 4000K CCT 80CRI
- 0 - 10V Dimming
- 5 Year Warranty

GUIDE CODE: PFX-3409-L20C-BK

CALL FOR PHOTOMETRIC INFORMATION

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
PFX-3409	POLYCARBONATE C-Clear	120-277V MULTI-VOLT	C-4K	BK-Black BZ-Bronze
		L20-20W, 1400lm	W-3K	

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.