

Model Number
PFX-3612

PROJECT
NOTES

DATE

TYPE




REV: 04, 2023



40W/55W/60W/70W/75W

PRODUCT DIMENSION

(unit: mm & inch)

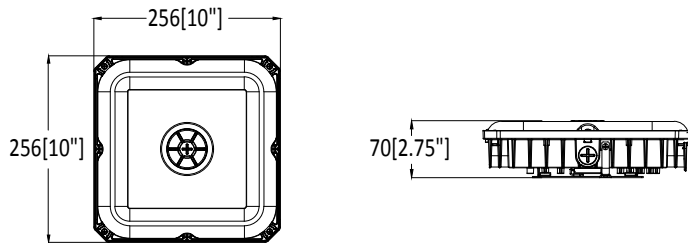

40W/55W/60W/70W/75W

COMPACT, HEAVY-DUTY HOUSING

The PFX-3612 is a 10" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

FIELD-SELECTABLE COLOR TEMPERATURES

3000K (warm white) , 4000K (neutral white) , & 5000 K (cool white)

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The PFX-3612 can be surface mounted or pendant mounted by a NPT3/4 " pipe

120-277V STANDARD

BEAM ANGLE 145 DEGREE

OPERATING TEMPERATURE - 30C TO 50C

LIFE TIME >50,000 HRS

PRODUCT APPLICATIONS

- Building Canopy
- Storage Facilities
- Parking Garages
- Gas Stations
- Tunnels
- Entryways

ORDERING GUIDE

PFX-3612-75W-CCT-BZ-27V-D1

MODEL	POWER TUNABLE WATTAGE	COLOR TEMPERATURE	HOUSING COLOR	VOLTAGE	DIMMING	OPTIONS & ACCESSORIES
PFX-3612	75W 75/60/40W Tunable 70W 70/60/40W Tunable 60W 60/40/30W Tunable 55W 55/40/30W Tunable 40W 40/30/20W Tunable	CCT 3K/4K/5K Selectable	BZ BRONZE (Std.) BL BLACK	27V 120-277V 34V 120-347V	D1 0-10V DIMMING	MS MOTION SENSOR PC PHOTOCCELL EM EMERGENCY BATTERY PACK


PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PERFORMANCE SUMMARY

Model	Size (mm)	Watts	Efficacy	Volt	CCT	CRI	DIM	Beam Angle
PFX-3612-40W	256*256*70	40/30/20W Selectable	135LM/W	120-277/120-347V	30/40/50K Selectable	>80	0-10V	145°
PFX-3612-55W	256*256*70	55/40/30W Selectable	135LM/W	120-277/120-347V	30/40/50K Selectable	>80	0-10V	145°
PFX-3612-60W	256*256*70	60/40/30W Selectable	135LM/W	120-277/120-347V	30/40/50K Selectable	>80	0-10V	145°
PFX-3612-70W	256*256*70	70/60/40W Selectable	135LM/W	120-277/120-347V	30/40/50K Selectable	>80	0-10V	145°
PFX-3612-75W	256*256*70	75/60/40W Selectable	135LM/W	120-277/120-347V	30/40/50K Selectable	>80	0-10V	145°

Remarks: All above efficiency and lumens are subject to 5000K, please check IES files for accurate data

PRODUCT APPEARANCE

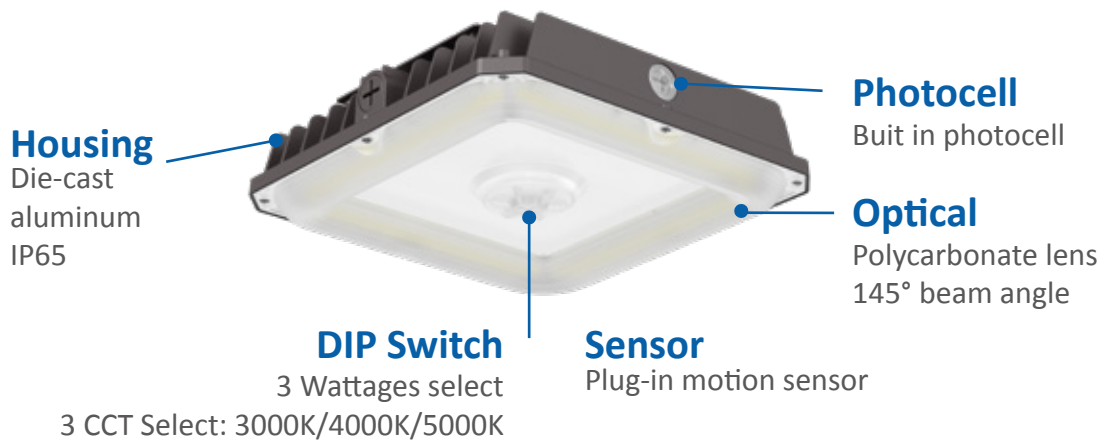

PACKING INFO

Model	Product Dimension (MM&INCH)	Carton Size (MM&INCH)	Q'ty/CTN	Net Weight (KG)	Gross Weight (KG)
PFX-3612-40W	256X256X70 (10.08"X10.08"X2.75")	440x305x310 (17.32X12.01X12.20)	4	2.1	2.8
PFX-3612-55W	256X256X70 (10.08"X10.08"X2.75")	440x305x310 (17.32X12.01X12.20)	4	2.2	2.9
PFX-3612-60W	256X256X70 (10.08"X10.08"X2.75")	440x305x310 (17.32X12.01X12.20)	4	2.2	2.9
PFX-3612-70W	256X256X70 (10.08"X10.08"X2.75")	440x305x310 (17.32X12.01X12.20)	4	2.3	3
PFX-3612-75W	256X256X70 (10.08"X10.08"X2.75")	440x305x310 (17.32X12.01X12.20)	4	2.3	3

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.