




Project:	
Type:	
Voltage :	

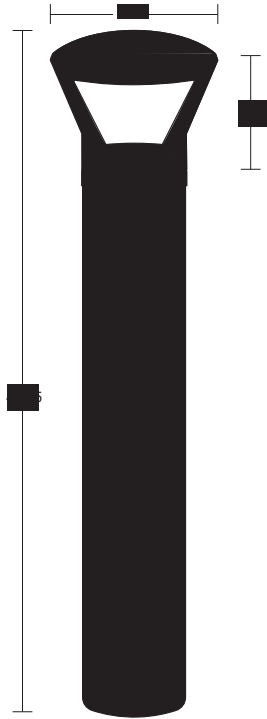


Paraflex Lighting's PFX-3411 Bollard adds a modern look to any pathway. This fixture is available in LED. Features Switchable Lumen/ Wattage, and Tunable CCT. UL listed and suitable for wet locations. PFX-3411 is designed for low mounting in reinforced concrete (by others), hardware and template is included.

TUNABLE
CCT Switchable
Lumen / Wattage



SPECIFICATIONS

- 8YREFPI"8
- 7MXGLEFPIOYQIR;EXXEKI
- Powder Coated Finish
- Aluminum Housing
- Polycarbonate Lens
- Minimum Starting Temp -20°F
- 90 Listed for Wet Locations
- %RGLSV&SPXW8IQTPEXI-RGPYHIH



LED SOURCE OPTIONS

LED MULTI-VOLT SYSTEM - L2

- 120-277V, 50/60Hz
- Estimated 50,000 Hrs L70
- Surge Supression
- 3000K 000K or 5000K CCT 80CRI
- 0 - 10V Dimming
- 5 Year Warranty

GUIDE CODE: PFX-3411-L2 -BK

CALL FOR PHOTOMETRIC INFORMATION

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
PFX-3411	POLYCARBONATE C-Clear	120-277V MULTI-VOLT	S-Switchable 3K, 4K 5K	BK-Black BZ-Bronze
		K13, Rvhsbg akd 03V 06//HI 08V 12//HI n 13V 2///HI		

PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.