PFX-3149

Square LED vanity Light

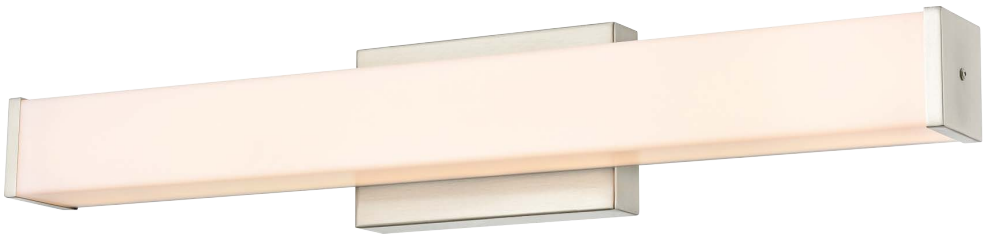

DIMENSION (INCHES)

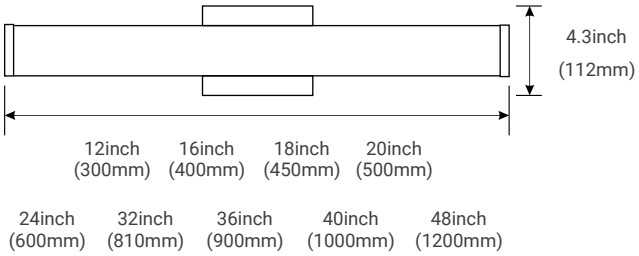

PHOTOMETRICS

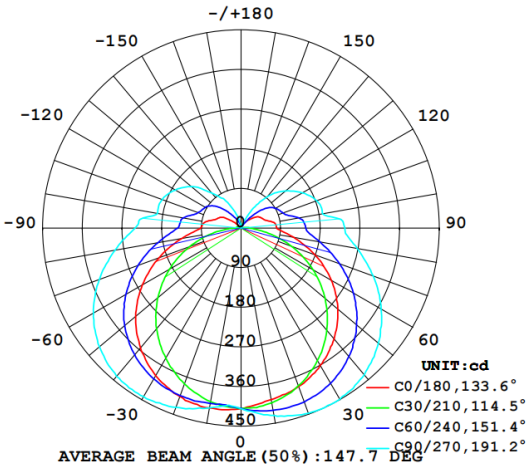

SPECIFICATIONS

Model Number	Size	Wattage	CCT	Lumen	CRI	Dim	Voltage	Certification	Finish
PFX-3149-WOR1- V12A-XX-YY-Z	12inch	15W	5CCT:27K/30K/35K/40K/50K	1000	80	Triac-Dim	120V	ETL/CETL	Brushed Nickel - BN
PFX-3149-WOR1- V16A-XXYY-U-Z	16inch	18W	5CCT:27K/30K/35K/40K/50K	1300	80	Triac-Dim	120V	ETL/CETL	
PFX-3149-WOR1- V18A-XX-YY-Z	18inch	20W	5CCT:27K/30K/35K/40K/50K	1600	80	Triac-Dim	120V	ETL/CETL	Black - BL
PFX-3149-WOR1- V20A-XXYY-U-Z	20inch	22W	5CCT:27K/30K/35K/40K/50K	1760	80	Triac-Dim	120V	ETL/CETL	
PFX-3149-WOR1- V24A-XX-YY-Z	24inch	25W	5CCT:27K/30K/35K/40K/50K	2000	80	Triac-Dim	120V	ETL/CETL	
PFX-3149-WOR1- V32A-XXYY-U-Z	32inch	28W	5CCT:27K/30K/35K/40K/50K	2240	80	Triac-Dim	120V	ETL/CETL	
PFX-3149-WOR1- V36A-XX-YY-Z	36inch	30W	5CCT:27K/30K/35K/40K/50K	2400	80	Triac-Dim	120V	ETL/CETL	
PFX-3149-WOR1- V40A-XXYY-U-Z	40inch	32W	5CCT:27K/30K/35K/40K/50K	2560	80	Triac-Dim	120V	ETL/CETL	
PFX-3149-WOR1- V48A-XX-YY-Z	48inch	35W	5CCT:27K/30K/35K/40K/50K	2800	80	Triac-Dim	120V	ETL/CETL	

OREDRING GUIDE

PFX-3149-WOR-SIZE(XX)-FINISH(XX)

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

973-340-6040
3 Luger Rd. #1 - Denville, NJ 07834
info@paraflex.com
paraflex.com

PFX-3149

Square LED vanity Light

Solution

- ETL/cETL Listed 1598
- Voltage 120V
- Wide Temperature range(TC) from 140°F to +185°F

Dimmer List

Lutron	Leviton
· Illuma Tech IPL06-107	· Maestro CLMACL-153M
· Sure Slide 6672-1LM	· Skylark Contour CTCL-153P
· Decora DLS06-1LZ	· Caseta PD-6WCL
· Ariadni CL TGCL-153P	· Sure Slide 6674-POW

Gerneral Specifications

Hz	60
Input PF	0.9
Max Effiency	75-80lm/W
Dim mode	Triac-Dimmable 100%-10%
CRI	80
Turn on time	<0.5s
Chassic	Steel
Diffuser	PMMA
LED Model NO.	2835
USE	Damp Rated

Installation

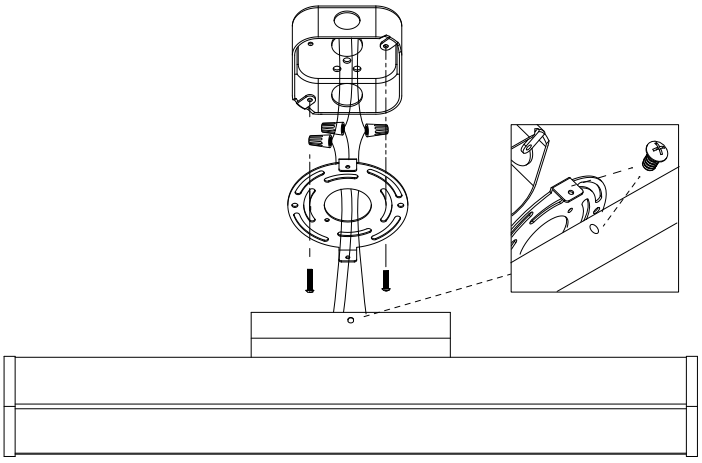

Application

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

973-340-6040
3 Luger Rd. #1 - Denville, NJ 07834
info@paraflex.com
paraflex.com