

PFX-5504

EZRXTU-RG



ILLUMINATION

- Ultra bright, energy efficient, long life field selectable Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.

OPTIONS

- 2C-120V/2C-277V: Voltage-specific Dual Circuit Option on the AC-Only unit enables it to be connected to two different power supplies at the same time.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in USA" under the Buy American Act.

WARRANTY / LISTING


- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.



ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
PFX-5504-EZRXTU-RED/GREEN EM	1.0	1.0	0.1	0.1

DIMENSIONS

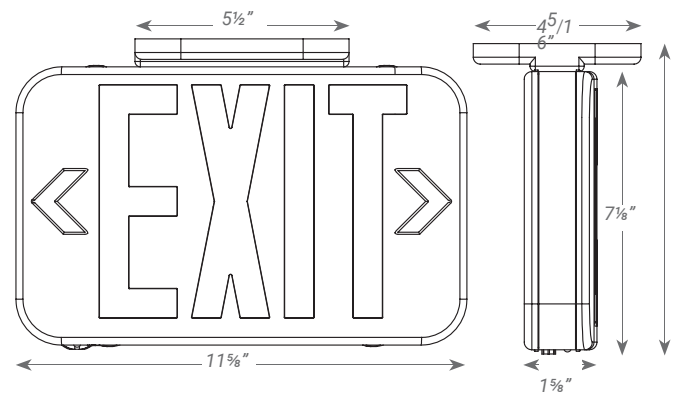

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-5504
EZRXTU-RG



ORDERING GUIDE

Example: PFX-5504-EZRXTU2RGW2C-120

SALIDA face plate option available.

Check with your Best Lighting Representative.

MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		BATTERY		OPTIONS	
PFX-5504-EZRXTU	2	Universal Single/ Double Face	RG	Red/Green ¹	W B	White Black	(blank) EM	AC Only Battery Back-Up	USA 2C-120 2C-277	Assembled in the USA Dual Circuit with 120V input ² Dual Circuit with 277V input ²

¹ Field Selectable

² Available only with AC-Only units

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.