


PFX-3144

LED MINI WALL PACK




SPECIFICATIONS

Model	PFX-3144-MPW-962-3W3CCT
Wattage	15W-20W-25W
Dimming	0-10V
Lumen Output	1800-2400-3000Lm
Input Voltage	AC100-277V 50/60Hz
CCT	3000K-4000K-5000K Selectable
CRI	Ra>80
Working Temperature	~4°F ~+113°F / ~20°C ~+40°C
Environment Location	WET LOCATIONS (IP66)
Lens	Clear Stripped
Life Span	Lumen Maintenance over 70% @ 50,000+ Hours
Lamp Shell	Bronze
Accessories Option	PC: Photocell Control Pre-Installed
DLC ID	S-K4BGAD
PCS/BOX	10
Master Box Dimension	L390*W335*H245mm / 15.35"x13.18"x9.65"
Master Box Weight	7.1KG / 15.65LB

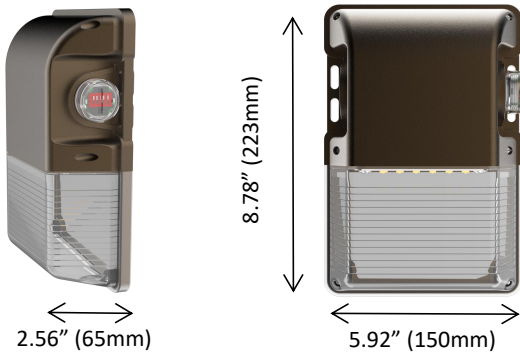

FEATURES


The transparent cover on the side can be screwed off easily.

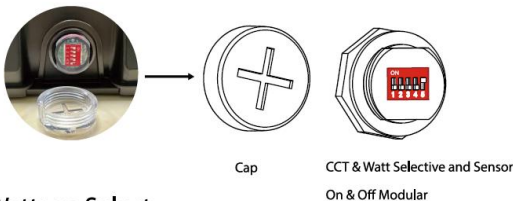

Wattage Select



Photocell



CCT Select



Disclaimer: Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.