


# PFX-3134

LED WALL PACK

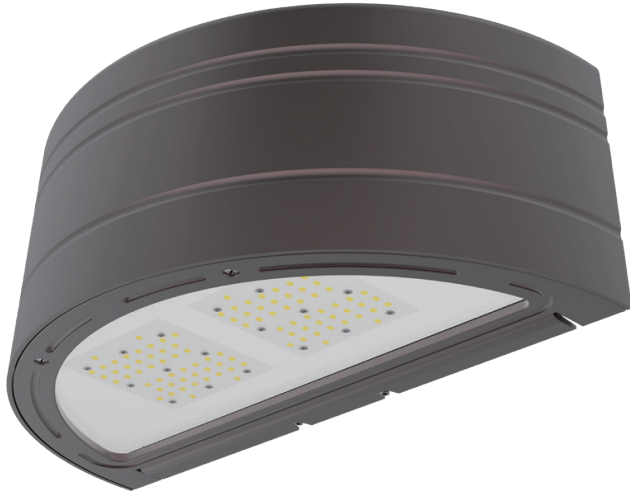


### PRODUCT FEATURES

Traditional Impact & weather resistant fixture with die cast aluminum housings and glass lenses. 30W/60W/80W field adjustable and 3000K/4000K/5000K field adjustable. Universal mounting plate with easy wall mount installation. 0-10V dimming as standard. Name brand chip and high quality driver@ 5 year.

### PRODUCT SPECIFICATIONS

<b>SYSTEM WATTAGE</b>	80WAD
<b>LUMENS</b>	3750LM/7500LM/10000LM
<b>EFFICACY</b>	UP TO 125LPW
<b>INPUT VOLTAGE</b>	120-277V
<b>CCT</b>	CCT ADJUSTABLE
<b>CRI</b>	>70
<b>WEIGHT</b>	13.5lbs
<b>AMBIENT TEMP.</b>	-30-40°C
<b>LED Performance</b>	L70>50000h
<b>STANDARD WARRANTY</b>	5Years

### PRODUCT DIMENSIONS

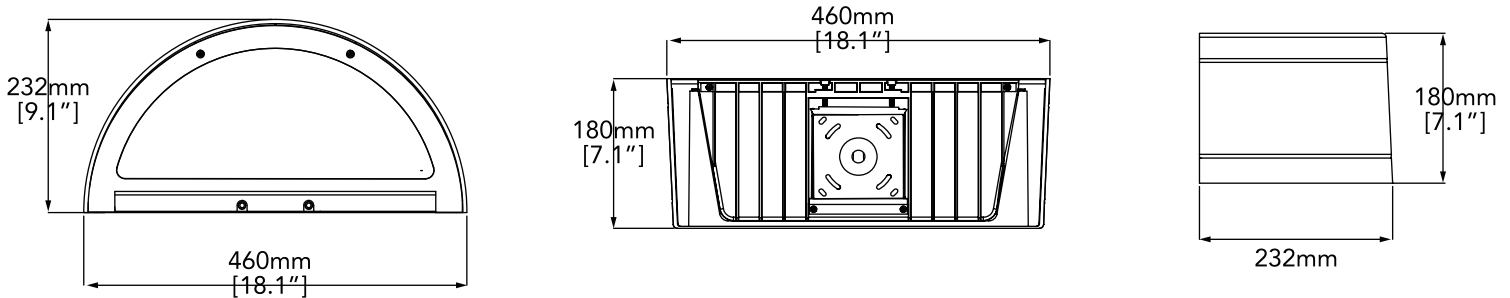

ORDERING GUIDE						SAMPLE PART # PFX-3134-80WAD-AD-V8-D-PC-S1-BZ	
MODEL	WATTAGE	CCT	VOLTAGE	DIMMING OPTION	OPTIONS	SURGE PROTECTOR	HOUSING FINISH
PFX-3134	80WAD	AD CCT ADJUSTABLE	V8 120-277V	D DIMMING	PC PHOTOCCELL	S1 SURGE PROTECTOR NA NONE	BZ BRONZE

**Disclaimer:**  
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.